

CRADLE-TO-GATE LIFE-CYCLE ASSESSMENT OF LAMINATED VENEER LUMBER (LVL) PRODUCED IN THE PACIFIC NORTHWEST REGION OF THE UNITED STATES

CORRIM FINAL REPORT

Module H1

By:

Richard D. Bergman
Research Forest Products Technologist
Economics, Statistics, and Life-Cycle Analysis Unit
USDA Forest Service
Forest Products Laboratory
One Gifford Pinchot Drive
Madison, WI 53726
Email: rbergman@fs.fed.us

Sevda Alanya-Rosenbaum
Postdoctoral Fellow
USDA Forest Service
Forest Products Laboratory
salanyarosenbaum@fs.fed.us

Revised April 2017

(values for water were revised in Tables 15, 25, 30, and 35)

Bergman R, Alanya-Rosenbaum S. 2017a. Cradle-to-gate life-cycle assessment of laminated veneer lumber produced in the Pacific Northwest region of the United States. CORRIM Final Report. Module H1. Revised April 2017. 92 p.

Information contained in this report is based on new survey data (2012) and supersedes information in the original Phase I report (Wilson and Dancer 2004). This report is a cradle to gate LCA and includes all forestry related upstream processes and packaging of final product. CORRIM REPORT - Life Cycle Assessment of Laminated Veneer Lumber (LVL) Production has not been certified but is written in compliance to the Product Category Rules North American Structural and Architectural Wood Products (June 2015) and can serve as a LCA for an Environmental Product Declaration.

1 EXECUTIVE SUMMARY

1.1 Study Goals

The goal of this study was to update life-cycle assessment (LCA) data associated with laminated veneer lumber (LVL) production in the Pacific Northwest (PNW) region of the United States from cradle-to-gate mill output. The authors collected primary mill data from LVL production facilities per Consortium on Research for Renewable Industrial Materials (CORRIM) Research Guidelines. Comparative assertions were not a goal of this study.

1.2 Method

The authors collected primary mill data through a survey questionnaire mailed to LVL plants. This survey tracked raw material inputs (including energy), product and byproduct outputs, and pertinent emissions to water and air as well as solid waste generation. The study incorporated and translated an industry-standard production unit to a metric production unit (one cubic meter was the declared unit). Secondary data, such as premill gate processes (e.g. forestry operations, dry veneer production, electricity production), were from peer-reviewed literature per CORRIM guidelines, public databases, or other life-cycle inventory (LCI) studies completed concurrently. Primary and secondary data were used to calculate material and energy balances. With these material and energy data, the LCA was constructed to conform to internationally accepted standards. The LCI flows and LCIA results were generated using LCA modeling software populated by the U.S. LCI Database. The study based all allocations on the mass and economic value of the products and coproducts produced from cradle to gate. The LCIA was performed using the Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI 2) method. Five impact categories were examined, including global warming potential (GWP (kg CO₂-eq)), acidification (kg SO₂-eq), eutrophication (kg N-eq), ozone depletion (kg chlorofluorocarbons-11-eq), and photochemical smog (kg NO_x-eq).

1.3 Life-Cycle Inventory

Cradle-to-gate LCI flows for LVL manufacturing were presented by three life stages, (1) forestry operations, (2) dry veneer production, and (3) LVL production. The majority of the raw material energy consumption occurred during dry veneer production, followed by LVL production, with a small portion arising from forestry operations. Emission data produced through modeling found that estimated biomass and fossil carbon dioxide (CO₂) emissions were 397 and 199 kg/m³ for the PNW, respectively. Veneer production occurs at veneer mills spread across the United States, and the wood is dried prior to arrival at LVL plant facilities. The production of LVL was modeled as a single unit process because the final product, LVL, by mass was made up of about 90% products with the remainder being coproducts.

The amount and type of energy used during production of building materials such as LVL are important to the holistic environmental impact of the product. Total cumulative primary energy consumption (CPEC) for the cradle-to-gate production of PNW LVL was 8.97 GJ/m³. Use of renewable energy in manufacturing LVL was substantial. Renewable biomass represented 52.5% of the total cumulative energy consumption for all stages of production. As for the other two life-cycle stages, forestry operations consumed relatively little energy, and this energy came exclusively from fossil fuels. This energy was only about 1.8% of the total cumulative energy consumption. In addition, the veneer production stage consumed roughly the same percentage of nonrenewable fossil fuel as the production of LVL itself. Energy consumed during phenol-formaldehyde (PF) resin production along with the additives of the resin system was included in fossil fuel use for LVL as an upstream process. In summary, to produce one cubic meter of PNW LVL from cradle to gate, 52.5% of the cumulative energy was from biomass (wood fuel) and 41.8% was from nonrenewable fossil fuels, which leaves a small portion of energy needs coming from nuclear energy (as electricity; 3.5%) and the remaining 1.8% from hydro, wind, solar, and geothermal sources.

1.4 Life-Cycle Impact Assessment

Environmental performance results for GWP, acidification, eutrophication, ozone depletion, and smog (the five impact areas) are provided. Also provided are environmental performance results for energy consumption from nonrenewable fossil and nuclear fuels and renewable sources (wind, hydro, solar, geothermal, and biomass), material resource consumption from renewable and nonrenewable sources, and solid waste. Impacts from the five environmental areas associated with LVL production were small compared with the impacts associated with dry veneer production.

1.5 Interpretation

Emissions from the forest resources LCI are small relative to manufacturing emissions (dry veneer and LVL). At the LVL production facility, emissions originate at the boiler and during hot-pressing and sawing. Boiler emissions released are a function of the fuel burned whereas other emissions are a function of the unit process and associated emission control device.

Cradle-to-gate LCI results showed that 199 kg fossil CO₂ were released in the production of one cubic meter of PNW LVL. LVL is primarily made of wood and therefore stores carbon. Carbon content for wood products is assumed to be 50% by mass of oven-dried (OD) wood. Excluding the resin system, the carbon stored in the wood portion of one cubic meter of LVL on a production-weighted average is equivalent to 959 kg CO₂ emissions if left to decay.

Data quality was high. A mass balance was performed to verify data quality. Inputs and outputs were consistent for the two surveyed mills on a cubic meter basis. In addition, total wood mass in and total wood mass out was calculated. Difference for overall wood mass was less than 2%. A difference less than 10% is considered good for wood product production.

Energy inputs from the 2012 study were compared with earlier CORRIM reporting on LVL production. As expected from the higher CPEC, the on-site energy inputs from the updated data were substantially higher than from earlier reported PNW LVL production. In particular, electricity and natural gas consumption drove the energy increase with differences of 41 and 76%, respectively. However, with that being said, no statistical analysis was conducted on the earlier data and different companies provided the primary 2000 only speculation can be made on the apparent differences. In this study, the weighted coefficient of variation representing the variability in the collected process data is calculated and presented in the report. Also in this study, a sensitivity analysis was performed investigating the impact to the overall output from the variation of energy inputs into LVL production.

1.6 Sensitivity Analysis

A sensitivity analysis was completed per International Organization for Standardization (ISO) 14040 standards to model the effects of natural gas consumption and electricity consumption for LVL production. The five environmental impacts associated with LVL production previously listed were small compared with the impacts associated with dry veneer production energy use. For the sensitivity analysis, neither on-site natural gas nor electrical consumption during LVL production showed a substantial contribution to the overall process compared with dry veneer production, which had a relatively large effect for the environmental indicators associated with energy consumption.

1.7 Key Findings

In this study, cradle-to-gate CPEC of LVL production for the U.S. was substantially higher compared with earlier CORRIM studies as well as a more recent Canadian study. A corresponding LCA update for southeastern cradle-to-gate LVL showed a similar conclusion. Yet, the authors can only speculate regarding the apparent differences because of the lack of statistical data analysis from earlier studies. Two scenario analyses indicated that LVL production itself was a minor contributor to the overall process

because veneer production largely outweighs LVL production in terms of energy inputs. As for energy inputs for LVL production itself, one possible explanation is the greater use of emission control devices outside of baghouses because of increased regulatory controls in the United States since the 2000s when Phase I survey data were collected.

2 ACKNOWLEDGMENTS

Primary funding for this project was through a cooperative agreement between the USDA Forest Service Forest Products Laboratory and the Consortium for Research on Renewable Industrial Materials (13-CO-11111137-014). We especially thank those companies and their employees that participated in the surveys to obtain production data. In addition, this research was supported in part by an appointment to the U.S. Forest Service Research Participation Program administered by the Oak Ridge Institute for Science and Education (ORISE) through an interagency agreement between the U.S. Department of Energy and the U.S. Department of Agriculture Forest Service. ORISE is managed by Oak Ridge Associated Universities (ORAU) under DOE contract number DE-AC05-06OR23100. All opinions expressed in this report are the authors' and do not necessarily reflect the policies and views of USDA, DOE, or ORAU/ORISE.

TABLE OF CONTENTS

1	Executive Summary	i
1.1	Study Goals.....	iii
1.2	Method	iii
1.3	Life-Cycle Inventory.....	iii
1.4	Life-Cycle Impact Assessment	iv
1.5	Interpretation.....	iv
1.6	Sensitivity Analysis	iv
1.7	Key Findings.....	iv
2	Acknowledgments	vi
3	Background.....	1
4	Introduction.....	1
4.1	Life-Cycle Assessment	1
4.2	Description of the Product	2
5	Method.....	3
5.1	Goal.....	3
5.2	Scope.....	3
5.2.1	Allocation rules	3
5.2.2	Functional and declared unit	4
5.2.3	System boundaries	4
5.2.4	Cut-off rules	5
5.2.5	Data quality requirements	6
5.2.6	Critical review	6
5.2.7	Assumptions and limitations	6
5.2.8	Data collection	6
5.2.9	Calculation rules.....	6
5.2.10	Life-cycle impact assessment method	7
6	Detailed Description of Data and Processes	8
6.1	Forestry Operations.....	8
6.2	Product Manufacturing	9
6.2.1	Resource transport.....	9
6.2.2	Veneer manufacturing.....	9
6.2.3	Phenol-formaldehyde resin	10
6.2.4	LVL manufacturing.....	10

6.3	Air Emissions.....	11
7	Inputs and Outputs.....	11
7.1	Material Transportation	11
7.2	Wood Boiler.....	12
7.3	Energy sources.....	13
7.4	Gate-to-Gate LVL Production	14
7.5	Material Flows	15
7.6	On-Site Energy Inputs.....	16
8	Life-cycle inventory data.....	16
9	Life-cycle impact assessment.....	20
10	Comparison of Updated LCI with a Previous Study	21
11	Treatment of biogenic carbon.....	22
12	Life-Cycle Interpretation	22
12.1	Identification of Significant Issues	22
12.2	Life-Cycle Phase Contribution Analysis	23
12.3	Substance Contribution Analysis.....	23
12.4	Completeness, Sensitivity, and Consistency Checks.....	24
12.5	Cumulative Primary Energy Consumption.....	24
12.6	Electricity Consumption	24
13	Conclusion, limitations, and recommendations	25
14	References.....	27
15	Appendix A: Conversion Factors	30
16	Appendix B: Pacific Northwest LVL Life-cycle Inventory Flows — Mass Allocation.....	31
17	Appendix C: Pacific Northwest LVL Life-cycle Impact Assessment — Economic Allocation	38
18	Appendix D: Pacific Northwest LVL Life-cycle Inventory Flows — Economic Allocation.....	43
19	Appendix E: Substance Contribution Analysis.....	43
20	Appendix F: Production Facility Survey Questionnaires	52

FIGURES

Figure 1. Steps involved in a life-cycle assessment (ISO 2006a).	2
Figure 2. Laminated veneer lumber.	3
Figure 3. Cradle-to-gate system boundary and process flow for production of PNW LVL.	5

TABLES

Table 1. Selected impact indicators, characterization models, and impact categories.....	8
Table 2. Inputs to the regeneration phase and midrotation fertilization per hectare of PNW forest (Puettmann et al 2013).	9
Table 3. Materials used in packaging and shipping per cubic meter LVL (Puettmann et al 2013).	11
Table 4. Weighted-average delivery distance (one way) by mode for materials to PNW LVL plant.	11
Table 5. CORRIM wood boiler process for manufacturing LVL. ^a	12
Table 6. Percentage of energy source for electricity to produce PNW LVL (NREL 2012).	13
Table 7. Unit process inputs–outputs to produce one cubic meter of PNW LVL.....	14
Table 8. Mass balance of PNW LVL manufacturing per cubic meter.	15
Table 9. Weighted-average on-site energy inputs for PNW LVL manufacturing	16
Table 10. Raw material primary energy consumption per one cubic meter of cradle-to-gate LVL, PNW, mass allocation.....	16
Table 11. Cumulative primary energy consumption per one cubic meter of cradle-to-gate LVL, PNW, mass allocation.....	17
Table 12. Air emissions released per one cubic meter of LVL, cradle-to-gate, PNW, mass allocation. ^a ...	18
Table 13. Emissions to water released per one cubic meter of LVL, cradle-to-gate, PNW, mass allocation. ^a	19
Table 14. Waste to treatment per one cubic meter of LVL, cradle-to-gate, PNW, mass allocation.	20
Table 15. Environmental performance of one cubic meter LVL, cradle-to-gate, PNW.	21
Table 16. Production-weighted average PNW on-site energy inputs for manufacturing one cubic meter LVL.....	21
Table 17. Carbon balance per one cubic meter LVL, PNW.	22
Table 18. Life-cycle stages contribution analysis of one cubic meter LVL, cradle-to-gate.	23
Table 19. Substance contribution analysis to GW (kg CO ₂ e) by life-cycle stage (total percentage basis and values).....	23
Table 20. Key parameters on changing natural gas consumption during LVL production.	24
Table 21. Key parameters on changing electricity consumption during LVL production.....	25
Table 22. Common conversions from English to SI units. ^a	30
Table 23. Electricity grids and dataset name by region and source.	30
Table 24. Energy contents and densities of various fuels.	30
Table 25. Mass allocation inventory.	31
Table 26. Raw material primary energy consumption per one cubic meter of cradle-to-gate LVL, PNW, economic allocation.	38
Table 27. Cumulative primary energy consumption per one cubic meter of cradle-to-gate LVL, PNW, economic allocation.	38
Table 28. Air emissions released per one cubic meter of LVL, cradle-to-gate, PNW, economic allocation. ^a	39
Table 29. Emissions to water released per cubic meter of LVL, cradle-to-gate, PNW, economic allocation. ^a	41
Table 30. Waste to treatment per one cubic meter of LVL, cradle-to-gate, PNW, economic allocation....	42
Table 31. Environmental performance of one cubic meter LVL, cradle-to-gate, PNW, economic allocation.....	42

Table 33. Substance contribution analysis to acidification (kg SO ₂ e) by life-cycle stage (total percentage basis and values).	43
Table 34. Substance contribution analysis to eutrophication (kg Ne) by life-cycle stage (total percentage basis and values).	43
Table 35. Substance contribution analysis to smog potential (kg O ₃ e) by life-cycle stage (total percentage basis and values).	44
Table 32. Economic allocation inventory.	45

3 BACKGROUND

CORRIM has derived LCI data for major wood products and wood production regions in the United States. The LCI data cover forest regeneration through to the final product at the mill gate. Research has covered nine major forest products including both structural and nonstructural uses and four major regions: this report focuses on industry-average LVL production in the PNW region of the United States. LCI data are then used to estimate life-cycle impact assessments (LCIA). This study updates the cradle-to-gate manufacturing LCIA data for LVL in the PNW (Wilson and Dancer 2004). Treatment of biogenic carbon was taken from the Norwegian Solid Wood Product product category rules (PCR) (Aasestad 2008) and the PCR for North American Structural and Architectural Wood Products (FPInnovations 2015) to ensure comparability and consistency. Using the LCIA outcomes, APA – The Engineered Wood Association and its members can explore potential process and parameter improvements and new conversion technologies along with the identification of environmental hotspots internally. Intended audiences include LCA practitioners along with building specifiers looking for green building products with documentation. The LCA is in conformance with the PCR for North American Structural and Architectural Wood Products (FPInnovations 2015) and ISO 14040 and 14044 standards (ISO 2006a, 2006b). This report follows data and reporting requirements as outlined in the PCR and contains the LCA components for producing a North American environmental product declaration (EPD) (ISO 2006c).

4 INTRODUCTION

Documenting the environmental performance of building products is becoming widespread because of many green marketing claims made without scientific merit (i.e. green washing). Developing EPDs for building products is one way to accomplish this objective for scientific documentation and to counter green washing (ISO 2006c; Bergman and Taylor 2011). In addition, developing wood product LCI data helps construct product LCAs that are then incorporated into developing whole-building LCAs in environmental footprint software such as the Athena Impact Estimator for Buildings (ASMI 2016). Conducting whole-building LCAs provides for points that go toward green building certification in rating systems such as LEED v4, Green Globes, and the ICC-700 National Green Building Standard (Ritter et al 2011).

4.1 Life-Cycle Assessment

LCA is an internationally accepted method to analyze complex environmental impacts of a product or process. It is intended to be an objective and holistic examination of a product that identifies and quantifies energy and materials used and emissions and wastes released to the environment. It also assesses the impact of that energy and material use and emissions to the environment. LCA studies can evaluate full product life cycles, often referred to as cradle-to-grave, or incorporate only a portion of the product's life cycle, referred to as cradle-to-gate or gate-to-gate. This study is a cradle-to-gate LCA and includes forestry operations, dry veneer production, and the manufacture of LVL that is ready to be shipped at the mill gate.

As defined by ISO (2006a), LCA is a multiphase process consisting of (1) goal and scope definition, (2) LCI, (3) LCIA, and (4) interpretation (Figure 1). These steps are interconnected, and their outcomes are based on goals and purposes of a particular study.

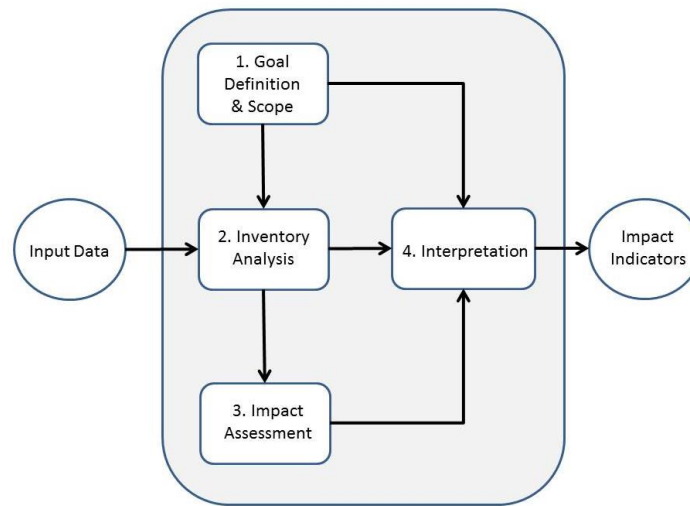


Figure 1. Steps involved in a life-cycle assessment (ISO 2006a).

The key component for conducting an LCA is the LCI step, which is the process of quantifying energy and raw material requirements, air emissions, waterborne effluents, solid waste, and other environmental releases occurring within the system boundaries.

The LCIA process uses models to characterize and assess the effects of environmental releases identified in the LCI in impact categories, such as global warming, acidification, carcinogenics, respiratory effects, eutrophication, ozone depletion, ecotoxicity, and smog. For assessing the environmental impacts of LVL production, the TRACI 2.0 impact method was used. TRACI is a midpoint-oriented LCIA method developed by the U.S. Environmental Protection Agency specifically for North America using input parameters consistent with U.S. locations (Bare 2011). TRACI is available through the LCA software used for modeling the LVL process (PRé Consultants 2016).

Life-cycle interpretation is the phase in which the findings of the LCI and/or the LCIA are evaluated in relation to the goal of the study to reach conclusions and recommendations. This final step in an LCA involves investigation of significant environmental aspects (e.g. energy use and greenhouse gases), their contributions to the indicators under consideration, and determination of which unit processes in the system they come from. For example, if the outcome of an LCIA indicates a particularly high value for GWP, the analyst could refer to the inventory to determine which environmental flows are contributing to the high value and from which unit processes those outputs are coming.

4.2 Description of the Product

Many engineered structural wood products have been developed in the last several decades, including LVL in the early 1970s (Figure 2). LVL falls into the North American Industry Classification System (NAICS) Code 321215—engineered wood member (except truss) manufacturing, which includes other structural wood engineered products such as finger joint lumber, I-joists, parallel strand lumber, and glued laminated timbers (USCB 2012; ASTM 2014). LVL comprises many dry wood veneers glued together with their grain orientation in the same direction (Wilson and Dancer 2005; USEPA 2002; Stark et al 2010). It is designed to be used in the same manner as solid wood products such as sawn lumber. The veneers are made from rotary peeling of veneer logs. It can be used in conjunction with softwood plywood or oriented strandboard (OSB) to make composite I-joists but can also be used as a standalone for headers, beams, and joists (Wilson and Dancer 2004, Puettmann et al 2013). Any wood species can be

used for LVL production provided its mechanical and physical properties are suitable and it can be properly glued. LVL in the PNW region is primarily made with Douglas-fir (*Pseudotsuga menziesii*). Dry veneer made into LVL comes from logs of many softwood species representing a mix of Douglas-fir (*Pseudotsuga menziesii*), white fir (*Abies concolor*), western hemlock (*Tsuga heterophylla*), lodgepole pine (*Pinus contorta*), and western larch (*Larix occidentalis*).



Figure 2. Laminated veneer lumber.

5 METHOD

5.1 Goal

The goal of this study was to update the cradle-to-gate LCIA of LVL manufacturing for the PNW region. The authors updated the gate-to-gate LVL manufacturing LCI data developed by Wilson and Dancer (2005) and linked it to available forest resource LCI data (Johnson et al 2005; Puettmann et al 2013) and dry veneer production LCI data (Kaestner 2015; Puettmann et al 2015) to construct the cradle-to-gate LVL plant output LCA. The LVL LCA data will be used to construct the cradle-to-gate LCA for I-joist production (Bergman and Alanya-Rosenbaum 2016a).

5.2 Scope

In accordance with international standards (ISO 2006a, 2006b; ILCD 2010), the scope of this LCA study covered the life-cycle stages of LVL from forest resource activities through veneer production to the final LVL product leaving the plant. Impacts from dry veneer production were included in the analysis using LCI data developed from updating softwood plywood for the PNW (Kaestner 2015; Puettmann et al 2015). This LCA provides a cradle-to-gate analysis of cumulative energy of manufacturing and transportation of raw materials to the veneer and LVL production facilities. Analyses included CPEC of LVL production and environmental impacts such as GWP.

5.2.1 Allocation rules

Selecting an allocation approach is an important part of an LCA study. In this study, all primary energy and environmental outputs were assigned to various coproducts by mass allocation. The decision was

based on the fact that LVL as the final product contained more than 90% of the mass leaving the system and because specific gravity of both LVL and associated coproducts were similar. In this study, economic allocation was performed in addition to mass allocation, because PCRs suggest using economic allocation for a multioutput process when the difference in revenues is more than 10% (FPInnovations 2015). The results of analysis using economic allocation are provided in Appendix E.

5.2.2 Functional and declared unit

In accordance with the PCR (FPInnovations 2015), the declared unit for LVL was one cubic meter. A declared unit was used in instances in which the function and the reference scenario for the whole life cycle of a wood building product could not be stated (FPInnovations 2015). For conversion of units from the U.S. LVL industry measure, 1.0 ft³ equals 0.02832 m³ with an oven-dried moisture content of 6%. All input and output data were allocated to the declared unit of product based on the mass of products and coproducts in accordance with ISO 14044 (ISO 2006b). Because the analysis did not take the declared unit to the stage of being an installed building product, no service life was assigned.

5.2.3 System boundaries

The system boundary begins with regeneration in the forest and ends with LVL at the mill gate (Figure 3). The system boundary includes forest resources (site preparation and planting seedlings, forest management including fertilization and thinning, and final harvest), transportation of roundwood to the primary breakdown facility, dry veneer production, dry veneer transportation to the LVL facility if needed, and LVL production including packaging. LVL production was modeled as a single process representing all the steps necessary to make LVL. Three production steps exist in manufacturing LVL: (1) lay-up, (2) hot-pressing, and (3) sawing and trimming, with energy generation as an auxiliary process. All emissions (i.e. outputs to the environment) and energy consumed were assigned to LVL and coproducts (i.e. sawdust) by mass or economic value depending if the mass or economic allocation approach was selected, respectively. A single unit (i.e. black box) approach was used to model the LVL process because little wood left the system except as the final product and because of the relative simplicity of the LVL manufacturing processes. This simply means all process inputs and outputs were grouped into one LVL process.

Fuel resources used for the cradle-to-gate production of energy and electricity were included within the cumulative system boundary. Off-site emissions included those from grid electricity production, transportation of feedstock and the resin system to the plant, and fuels produced off site but consumed on site. Ancillary material consumption data such as motor oil, paint, and hydraulic fluid were included in the analysis.

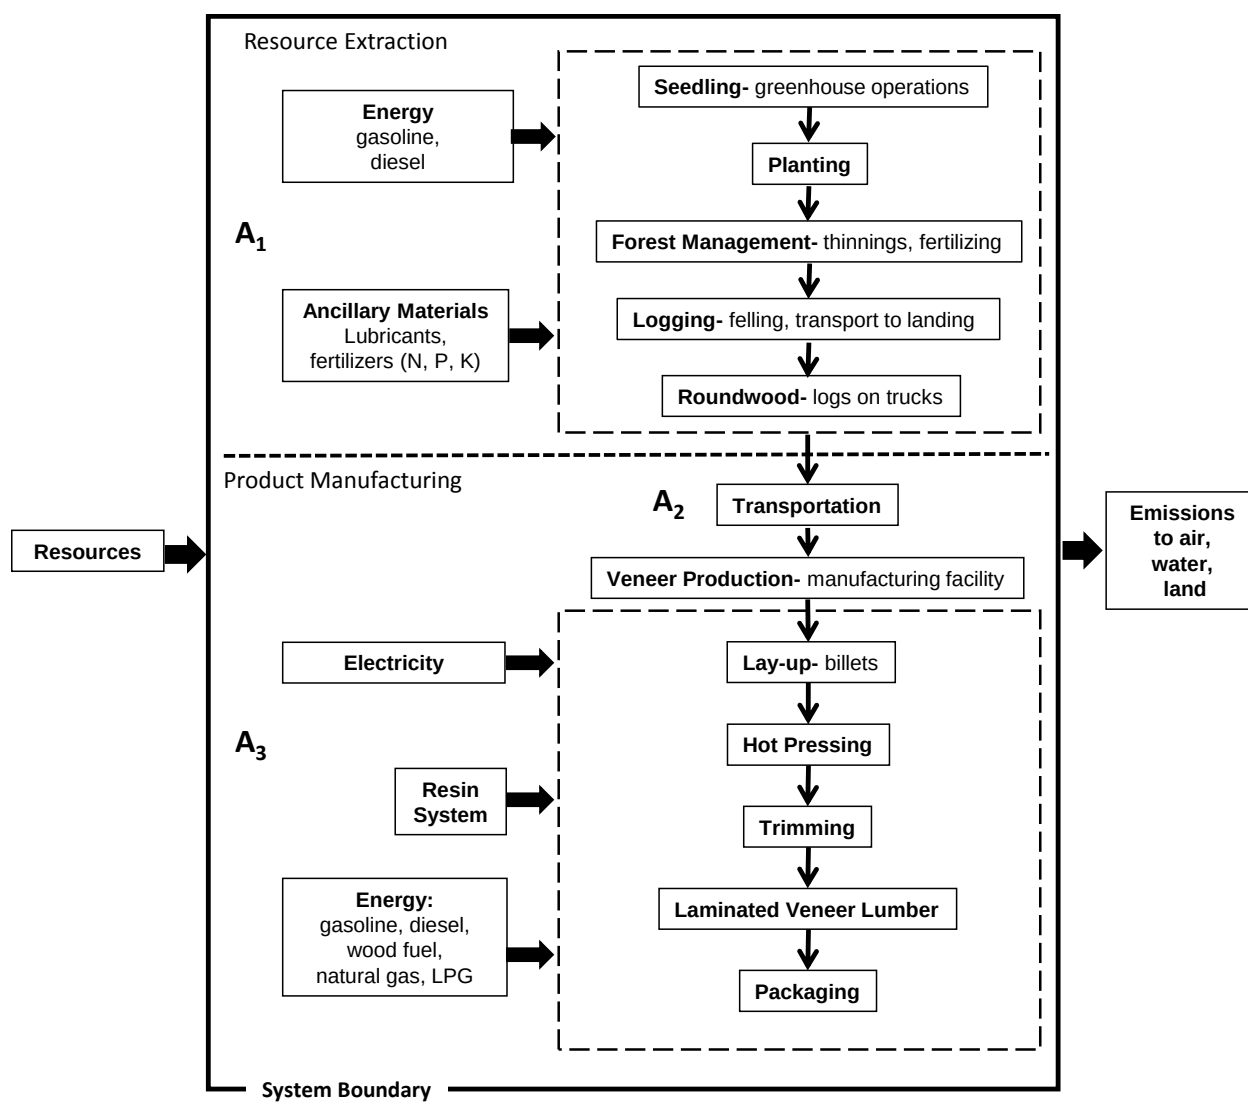


Figure 3. Cradle-to-gate system boundary and process flow for production of PNW LVL.

5.2.4 Cut-off rules

According to the PCRs, if the mass/energy of a flow is less 1% of the cumulative mass/energy of the model flow, it may be excluded, provided its environmental relevance is minor. This analysis included all energy and mass flows for primary data.

In the primary surveys, manufacturers were asked to report total hazardous air pollutants (HAPs) specific to their wood products manufacturing process, regardless of whether they were less than the 1% cutoff or not. These included formaldehyde, methanol, acrolein, acetaldehyde, phenol, and propionaldehyde (propanal). If applicable to the wood product, HAPs are reported later in the LCI data section.

In the primary surveys, manufacturers were asked to report total HAPs specific to their wood products' manufacturing process. Under Title III of the Clean Air Act Amendments of 1990, the EPA has designated HAPs that wood products facilities are required to report as surrogates for all HAPs. These are methanol, acetaldehyde, formaldehyde, propionaldehyde (propanal), acrolein, and phenol. All HAPs are

included in the LCI; no cut-off rules apply. If applicable to the wood product, HAPs are reported in Table 12 and included in the impact assessment. Table 12 shows all air emission greater than 10^{-4} to simplify and report on the dominant releases by mass. There were no cut offs used in the impact assessment. Therefore, a complete list of all air emissions (including less than 10^{-4}) is located in Appendix B of this report.

5.2.5 Data quality requirements

This study collected data from representative LVL manufacturers in the PNW that use average technology for their region. The dry veneer produced at the product manufacturing facilities in the PNW region is the raw wood input to LVL production.

Total U.S. LVL production for 2012 was 1.31 million m^3 . Two U.S. LVL plants representing 8.5% of 2012 U.S. production (0.111 million m^3) participated in the study by providing primary data for the PNW region (APA 2014). The PNW is one of the primary regions for producing structural wood products such as LVL (Smith et al 2004). The surveyed plants provided detailed annual production data about their facilities, including on-site energy consumption, electrical usage, veneer volumes, and LVL production for 2012. Wilson and Dancer (2005) performed a 2000 U.S. LVL LCI study that covered 34% (0.187 million m^3) of production in the PNW. Production from surveyed facilities in 2012 decreased 40% compared with 2000. In addition, unlike the earlier 2000 study, 2012 LVL production data were not available by region. Therefore, LVL production data by region could not be quantified for 2012.

5.2.6 Critical review

An internal critical review of the survey procedures, data, analysis, and report will be completed to assess conformance with CORRIM and ISO 14040 standards by Dr. Maureen Puettmann, WoodLife Environmental Consultants, Corvallis, Oregon.

The review will provide assurances that the study methodology, data collection, and analyses were scientifically sound and in conformance with internationally accepted standards and CORRIM research protocol (ISO 2006b; ILCD 2010; CORRIM 2014, FPInnovations 2015).

5.2.7 Assumptions and limitations

All flow analyses of wood and bark in the process were determined on an oven-dry weight basis with a weighted-production density of 543 kg/m^3 .

Although small in quantity relative to the wood mass, impacts from production of the resin system were included in the analysis.

5.2.8 Data collection

Primary data for the LCI were collected through surveys in accordance with CORRIM and ISO 14040 standards (Appendix F). This study relied almost exclusively on production and emissions data provided by LVL producers in the United States, with secondary data on electrical grid inputs, fuels, and forest resource processes obtained from the U.S. LCI database (Goemans 2010; NREL 2012). The survey data represent LVL production in terms of input materials, electricity and fuel use, and emissions for the 2012 production year. The two production facilities surveyed were selected to be representative of U.S. production practices.

5.2.9 Calculation rules

For U.S. production, LVL is commonly reported in cubic feet. The survey results were converted to a unit production basis, one cubic meter, and a weighted average of input data was calculated based on production. One cubic foot of LVL equals 0.02832 m^3 with an oven-dried moisture content of 6%. This

approach resulted in an LVL complex that represents a composite of the North American mills surveyed but may not represent any mill in particular. The U.S. LCI database was used to assess off-site impacts associated with the materials and energy used. SimaPro, version 8+ (Pré Consultants 2016) was used as the accounting program to track all of the materials. The primary data obtained from the surveys were weight-averaged using the formula shown below (Milota 2004):

$$\bar{P}_{weighted} = \frac{\sum_{i=1}^n P_i x_i}{\sum_{i=1}^n x_i}$$

Where $\bar{P}_{weighted}$ is the weighted average of the values reported by n mills, P_i is the reported mill value, and x_i is the fraction of the mill's value to total production of the surveyed mills for that specific value. Because the surveyed mill data varied between facilities, a statistical analysis was conducted. In this study, the weighted coefficient of variation (CoV_w) was calculated (NIST ITL 1996). The weighted coefficient of variation (CoV_w) is the weighted standard deviation (sd_w) divided by the weighted mean ($\bar{P}_{weighted}$):

$$sd_w = \sqrt{\frac{\sum_{i=1}^N (x_i - \bar{x}_w)^2}{(N' - 1) \frac{\sum_{i=1}^N w_i}{N'}}}$$

$$CoV_w = \frac{sd_w}{\bar{P}_{weighted}}$$

Where w_i is the weight of the i^{th} observation, N is the number of nonzero weights, and $\bar{x}_w$ is the weighted mean of the observations.

Missing data were defined as data not reported in surveys by the LVL facilities. When missing data occurred for survey items, they were checked with plant personnel to determine if it was an unknown value or zero. Missing data were carefully noted to make sure they were not averaged as zeros. Any outliers were resolved by contacting mill personnel.

5.2.10 Life-cycle impact assessment method

The LCIA was performed using the TRACI 2 method (Bare 2011). TRACI is a midpoint-oriented method developed by the U.S. Environmental Protection Agency specifically for the five impact categories that were examined, which include global warming (GW (kg CO₂-eq)), acidification (kg SO₂-eq), eutrophication (kg N-eq), ozone depletion (kg chlorofluorocarbons-11-eq), and photochemical smog (kg NO_x-eq).

The LCIA phase establishes links between the LCI results and potential environmental impacts. The LCIA calculates impact indicators, such as GWP and smog. These impact indicators provide general, but quantifiable, indications of potential environmental impacts. The target impact indicator, impact category, and means of characterizing the impacts are summarized in Table 1. Environmental impacts are determined using the TRACI method (Bare 2011). These five impact categories are reported consistent with the requirement of the wood products PCR (FPInnovations 2015).

Table 1. Selected impact indicators, characterization models, and impact categories.

Impact indicator	Characterization model	Impact category
Greenhouse gas (GHG) emissions	Calculate total emissions in the reference unit of CO ₂ equivalents for CO ₂ , methane, and nitrous oxide.	Global warming
Releases to air decreasing or thinning of ozone layer	Calculate the total ozone forming chemicals in the stratosphere including CFCs HCFCs, chlorine, and bromine. Ozone depletion values are measured in the reference units of CFC equivalents.	Ozone depletion
Releases to air potentially resulting in acid rain (acidification)	Calculate total hydrogen ion (SO ₂) equivalent for released sulfur oxides, nitrogen oxides, hydrochloric acid, and ammonia. Acidification value of SO ₂ mole- eq. is used as a reference unit.	Acidification
Releases to air potentially resulting in smog	Calculate total substances that can be photochemically oxidized. Smog forming potential of O ₃ is used as a reference unit.	Photochemical smog
Releases to air potentially resulting in eutrophication of water bodies	Calculate total substances that contain available nitrogen or phosphorus. Eutrophication potential of N-eq. is used as a reference unit.	Eutrophication

Each impact indicator is a measure of an aspect of a potential impact. This LCIA does not make value judgments about the impact indicators, meaning that no single indicator is given more or less value than any of the others. Additionally, each impact indicator value is stated in units that are not comparable with others. For the same reasons, indicators should not be combined or added.

6 DETAILED DESCRIPTION OF DATA AND PROCESSES

6.1 Forestry Operations

Logs used in the production of LVL in the PNW include in their life-cycle the upstream activities associated with establishment, growth, and harvest of trees. This group of activities is collectively referred to as forest resource management. Forest operations modeled as inputs to dry veneer and LVL production were based on forest resource LCI data inputs from the PNW softwood forests (Johnson et al 2005; Puettmann et al 2013). Forestry operations vary regionally (Johnson et al 2005) but typically include some combination of growing seedlings, regeneration, site preparation, planting (where applicable), thinning, fertilization (where applicable), and final harvest. Harvesting included felling, skidding, processing, and loading for both commercial thinning and final harvest operations. For PNW forests, reforestation occurs primarily by planting, which requires input from human-related activities (i.e., the technosphere) for seedlings, site preparation, planting, and precommercial thinning (Table 2). Weighted-average allocation to different processes takes into account inherent differences in site productivity and energy usage by different kinds of logging equipment. Inputs to the forest resources management LCI include seed, electricity used during greenhouse operations, fertilizer used during seedling production and stand growth, fuel and lubricants needed to power and maintain equipment for thinning, and harvest operations. The primary output product is a log destined for softwood veneer. The coproduct, nonmerchantable (logging) slash, is generally left at a landing. Slash disposal was not modeled as it was assumed to decay in situ.

Table 2. Inputs to the regeneration phase and midrotation fertilization per hectare of PNW forest (Puettmann et al 2013).

Inputs	Unit	Low intensity	Medium intensity	High intensity	Weighted average
Reforesting 1 ha					
Diesel and gasoline	L	12	12	12	12
Seedlings, at greenhouse	p ^a	988	1,482	1,482	1,275
Nitrogen in fertilizer					
In seedlings	kg	0.04	0.06	0.06	0.05
On site	kg	-	-	396.78	47.61
Phosphorous in fertilizer					
In seedlings	kg	0.07	0.11	0.11	0.09
On site	kg	-	-	67.25	8.07
Potassium in fertilizer					
In seedlings	kg	0.17	0.26	0.26	0.22
On site	kg	-	-	-	-

^a p = individual seedling.

In the PNW region, most harvested volume comes from forest operations on private lands where investment in timber is the precursor to harvest. For all nonfederal land managers in the PNW region, reforestation is a statutory requirement as harvests are administered under state forest practices acts. Harvested lands are reforested for the next crop cycle with the sequence of treatments from planting to harvest averaging 45 years (Johnson et al 2005; Puettmann et al 2013). Forestry operations and their associated impacts are not stationary and will change based on both past and prospective technologies, evolving forest management procedures, and market demands. Given that the nature of productivity gains is not confirmed or well developed, this assessment was based on data representing the current state of the art in forest operations: it does not discount future operations or estimate potential productivity gains from future technologies. Outputs representing quantities of product, measures of consumed resources, and the emissions associated with those consumed resources were developed as a weighted average across the hectares managed for timber production. These quantities of product are used as inputs to the LVL manufacturing LCI, and the consumed resources and emissions are tracked for inclusion in the cradle-to-gate LCI.

6.2 Product Manufacturing

6.2.1 Resource transport

Wood raw materials were delivered to the LVL plants by truck and rail. The wood raw material consisted primarily of dry veneer purchased off site or produced on site. However, transportation for dry veneer was only required for LVL plants purchasing dry veneer not for LVL plants producing their own dry veneer. The final dry veneer transportation data modeled was production-weighted between purchased and produced dry veneer.

6.2.2 Veneer manufacturing

Dry softwood veneer plies must be made before LVL can be produced. Veneers can be made during softwood plywood production or as a precursor to LVL at the same production facility. This study uses veneer data provided by Puettmann et al (2015) on softwood plywood production. Dry veneer ranges in moisture content from 3% to 6% (oven-dry basis). The dry veneer made into LVL comes from logs of many softwood species representing a mix of Douglas-fir (*Pseudotsuga menziesii*), white fir (*Abies*

concolor), western hemlock (*Tsuga heterophylla*), lodgepole pine (*Pinus contorta*), and western larch (*Larix occidentalis*).

6.2.3 Phenol-formaldehyde resin

The LCI for the production of PF resin covers its cycle from in-ground resources to the production and delivery of input chemicals and fuels to the manufacturing of a resin as shipped to the customer (Wilson 2010). The PF resin survey data were from 13 plants in the United States that represented 62% of total production for the year 2005 (Wilson 2009). The inputs to produce 1.0 kg of neat PF resin consist of the two primary chemicals: 0.244 kg of phenol and 0.209 kg of methanol, a lesser amount of sodium hydroxide (0.061 kg), and 0.349 kg of water. Electricity is used for running fans and pumps and for operating emission control equipment. Natural gas is used for boiler fuel and emission control equipment, and propane fuel is used in forklifts.

6.2.3.1 Energy generation

Energy for the manufacturing of LVL comes from electricity, natural gas, diesel, and liquid petroleum gas (LPG). Electricity is used to operate the lay-up and hot-pressing equipment, as well as pneumatic and mechanical conveying equipment, fans, and other equipment in the plant. Natural gas is used for generating heat for the presses. Diesel is used for the equipment that transports materials outside of the plant, and LPG is used in forklift trucks, which are operated inside the plant. Other types of fuels, including wood, are used to generate energy in the plywood plants to produce dry veneer. These energy sources are not analyzed in this report, but the burdens that are created are carried over into the LVL final product. Puettmann (2015) gives information on the energy consumption for producing dry veneer.

6.2.4 LVL manufacturing

6.2.4.1 Lay-up

The lay-up lines are used to arrange pieces of the proper grades of dry veneer into the assembly process, apply resin to the veneer, and assemble the veneers into a mat before pressing (Baldwin 1995; Wilson and Dancer 2005). At the start of the line, a veneer feeder assembly places pieces of veneer into the lay-up sequence according to the type of LVL produced. Even though LVL can vary in thickness and width, it is most commonly produced in the dimensions of 4.45-cm (1-3/4-in) thick, 121.9-cm (4-ft) wide, and 2.44- to 18.29-m (8- to 60-ft) long. After pieces of veneer are arranged onto the lay-up conveyor, resin is applied to each piece of veneer, except for the top veneer layer in the LVL billet. After resin has been applied, the LVL mat is assembled layer by layer. Inputs include dry veneer and resins, and outputs include LVL billet, lay-up scrap, and small amounts of volatile organic compounds (VOCs) and HAPs. Although a small amount of fugitive VOCs and HAPs are emitted, they are accounted for within the hot-pressing unit process.

6.2.4.2 Hot-pressing

From the lay-up line, the uncured LVL billet is sent for hot-pressing. The heat and pressure applied during hydraulic pressing cures the resin thus binding the veneer layers together. Inputs include uncured LVL billets, outputs include cured LVL billets along with emissions of particulate matter (PM), PM_{2.5}, VOCs, and HAPs released from heating of the wood and curing of the resins. Cold-pressing can also occur at some production facilities when wider LVL billet beams are produced.

6.2.4.3 Trimming-sawing

After pressing, the LVL billet is sawn to the desired dimensions. The LVL can now be manufactured into flanges for I-joists. The wood residue generated during trimming-sawing is collected pneumatically into a wood waste collection system (i.e. baghouses). After sawing, a protective and cosmetic sealant is sometimes applied to the LVL. Inputs include LVL billets and sealant, and outputs include finished LVL,

(used) tested LVL, and wood residues along with emissions of PM, PM_{2.5}, and PM₁₀ from collecting wood residues and VOCs and HAPs from application and curing of sealant.

6.2.4.4 Packaging

Finished LVL is packaged for transport using wooden runners primarily by mass. Inputs include final product (LVL) and packaging material such as plastic wrapping, and outputs include packaged LVL. Packing materials represent about 1.0% of the cumulative mass of the model flow. The wooden spacers make up the bulk of this mass, representing 86.3% of the total packaging material (Table 3). The wrapping material, cardboard strap protectors, and plastic strapping make up 8.5%, 3.7%, and 1.5% of the packaging by mass, respectively.

Table 3. Materials used in packaging and shipping per cubic meter LVL (Puettmann et al 2013).

Material ^a	Value	Unit	Percentage
Wrapping material – HDPE ^a - and LDPE ^b -laminated paper, kg	0.4601	kg	8.5
PET strapping	0.0834	kg	1.5
Cardboard strap protectors	0.2002	kg	3.7
Wooden spacers	4.6721	kg	86.3
Total	5.4158	kg	100

^aHigh-density polyethylene (HDPE)

^bLow-density polyethylene (LDPE)

^cPolyethylene terephthalate (PET)

6.3 Air Emissions

The main on-site emission sources were from burning natural gas for thermal energy and from hot presses. Natural gas boilers do not typically use emission control devices (ECDs). ECDs such as baghouses are the primary collectors of particulate matter. To decrease VOC emissions from dryers, mills use regenerative catalytic oxidizers (RCOs), which are sometimes referred to as regenerative thermal oxidizers (RTOs) and wet scrubbers. RCOs are designed to destroy VOCs and other emissions including PM and soot (USEPA 2003a).

7 INPUTS AND OUTPUTS

7.1 Material Transportation

The average haul distance for feedstock along with the components of the resin system are shown in Table 4. Based on CORRIM Phase I (Puettmann et al 2013), dry veneer distance for the PNW region decreased to 108 km by truck compared with 121 km for the earlier data, roughly a 11% decrease. Both surveyed PNW LVL plants purchased dry veneer to produce LVL although one plant produced most of its own veneer. The dry veneer transportation data modeled was production-weighted between purchased and dry veneer for a final value of 52 km.

Table 4. Weighted-average delivery distance (one way) by mode for materials to PNW LVL plant.

Material delivered to mill	Delivery distance (km)
Purchased dry veneer, by truck	108
Phenol-formaldehyde resin, by truck	79
Log with bark to veneer production, by truck	104

7.2 Wood Boiler

Table 5 lists the wood boiler process inputs and outputs for product manufacturing in the PNW and the SE. The wood boiler profile is a composite process developed in 2014 using data collected from U.S. softwood lumber and plywood industries (Puettmann and Milota 2015). No wood boiler fuel was consumed on site at the LVL plants. The wood boiler data was only included to provide information for potential scenario analysis and to show what upstream emissions occurred when wood fuel was burned.

Table 5. CORRIM wood boiler process for manufacturing LVL.^a

Products	Unit	Value	Percentage
Wood combusted, at boiler, at mill, RNA ^b	kg	1.0000	98.13
Wood ash, at boiler, at mill, RNA	kg	0.0191	1.87
Resources			
Water, process, surface	kg	0.31	
Water, process, well	kg	0.24	
Water, municipal, process, surface	kg	0.79	
Water, municipal, process, well	kg	0.24	
Materials–fuels			
Wood fuel	kg	1.0000	
Transport, combination truck, diesel powered/U.S., Athena	tkm	1.38E-03	
Diesel, combusted in industrial equipment/U.S.	l	8.05E-04	
Gasoline, combusted in equipment/U.S.	l	3.96E-05	
Liquefied petroleum gas, combusted in industrial boiler/U.S.	l	1.21E-05	
Lubricants	l	1.91E-05	
Engine oil	l	2.22E-05	
Hydraulic oil	l	0.00E+00	
Antifreeze	l	4.81E-07	
Ethylene glycol, at plant/RNA	kg	1.07E-06	
Solvents	kg	7.17E-07	
Water treatment	kg	1.23E-04	
Boiler streamline treatment	kg	3.67E-06	
Urea, as N, at regional storehouse/RER ^c U AWC ^d	kg	3.15E-03	
Disposal, ash, to unspecified landfill/RNA	kg	7.59E-03	
Disposal, solid waste, unspecified, to unspecified landfill/RNA	kg	7.26E-06	
Disposal, metal, to recycling/RNA	kg	3.96E-08	
Electricity–heat			
Electrical grid, SERC ^e	kWh	8.20E-02	
Natural gas, combusted in industrial boiler/U.S.	m ³	1.38E-03	
Emissions to air			
Acetaldehyde	kg	1.05E-06	
Acrolein	kg	8.07E-07	
Benzene	kg	1.69E-07	
Carbon monoxide, biogenic	kg	3.23E-03	
Carbon dioxide, biogenic	kg	1.76E+00	
Wood (dust)	kg	5.62E-04	
Formaldehyde	kg	1.26E-05	
Emissions to air	Unit	Value	
HAPs, unspecified	kg	6.27E-06	
Hydrogen chloride	kg	1.17E-06	
Lead	kg	1.75E-07	
Mercury	kg	1.83E-09	
Methane, biogenic	kg	2.23E-05	

Methanol	kg	7.95E-06	
Nitrogen oxides	kg	1.10E-03	
Particulates, <10 um	kg	4.71E-04	
Particulates, <2.5 um	kg	1.39E-04	
Phenol	kg	6.21E-07	
Propanal	kg	5.14E-08	
Sulfur dioxide	kg	7.71E-05	
VOCs	kg	8.76E-04	
Dinitrogen monoxide	kg	2.93E-06	
Naphthalene	kg	5.77E-08	
Other organic	kg	2.11E-07	
Emissions to water			
Suspended solids, unspecified	kg	8.35E-07	
Biological oxygen demand (BOD ₅)	kg	2.10E-06	

^aBoiler data from Puettmann and Milota (2015)

^bRNA = North America

^cRER = Europe, U = Unit

^dAWC = American Wood Council

^eSERC stands for Southeastern Electric Reliability Council, and

7.3 Energy sources

Energy sources consumed on site were derived from on-site and off-site sources. On-site sources, process (thermal) energy used at the plant was provided by burning natural gas. Thermal energy was commonly produced in the form of steam and then used in the hot-pressing unit process. Outputs from generating thermal energy included steam from the boilers and combustion gases like fossil CO₂. The main off-site source was (grid) electricity, which released its emissions off site. Table 6 shows the electrical grid composition for LVL production in the PNW region. Natural gas (31.8%) and coal (30.2%) power comprises most of the PNW (Western Electricity Coordinating Council (WECC)) grid. Outputs included electricity and emissions primarily of fossil CO₂.

Table 6. Percentage of energy source for electricity to produce PNW LVL (NREL 2012).

Energy source	Amount of energy used for electricity (%) ^a
Natural gas	31.8
Coal	30.2
Oil	0.3
Nuclear	9.4
Hydro	22.2
Wind	2.4
Biomass	1.0
Geothermal	1.9
Miscellaneous	0.8
Total	100.0

^a WECC - Representative of year 2008 mix of fuels used for utility electricity generation in the western United States and Canada. It is comprised of Washington, Idaho, Montana, Portland, British Columbia, Alberta, California, Utah, Nevada, Arizona, New Mexico, Colorado, Wyoming, and parts of Nebraska, Texas, and Mexico.

7.4 Gate-to-Gate LVL Production

Table 7 shows a detailed description of the material and energy inputs and outputs crossing the system boundary of LVL. Under materials, wood feedstocks include purchased and produced dry veneer. Electricity consumed on site for PNW was estimated to be 77.4 kWh/m³. Natural gas was the primary fossil fuel used on site. Air emissions were derived from the surveyed mills along with pertinent emissions data categorized by the U.S. Environmental Protection Agency (USEPA 2002, 2003a, 2003b, 2003c). When available, surveyed air emission data as primary data were selected rather than secondary data. Boiler emissions are tracked separately and are not included in Table 7.

Table 7. Unit process inputs–outputs to produce one cubic meter of PNW LVL.

Products	Unit/m ³	Value	Allocation ^a
LVL	m ³	1.000E+00	89.31%
Sawdust, sold	kg	5.27E+01	8.68%
Panel trim, sold	kg	3.41E+00	0.56%
Lay-up scrap	kg	2.94E+00	0.48%
Tested LVL, used	kg	5.88E+00	0.97%
Resources	Unit/m ³	Value	
Water, well, in ground	L	1.74E+00	
Materials–fuels	Unit/m ³	Value	
Wood feedstock, purchased dry veneer, oven-dried	kg	5.85E+02	
PF resin	kg	1.78E+01	
Sodium hydroxide	kg	3.19E+00	
Materials–fuels	Unit/m ³	Value	
Catalyst	kg	2.45E-01	
Melamine	kg	1.56E+00	
Electricity, at grid	kWh	7.74E+01	
Diesel, combusted in industrial equipment	L	3.50E-01	
Propane, combusted in industrial equipment	L	4.77E-01	
Natural gas, combusted in industrial boiler, direct-fired	m ³	1.28E+01	
Wood fuel, combusted in boiler, self-generated	kg	0.00E+00	
Transport, combination truck, diesel power, wood feedstock	tkm	3.23E+01	6% MC
Transport, combination truck, diesel powered, PF resin	tkm	2.23E+00	60% MC
Transport, combination truck, diesel powered, landfill waste	tkm	1.00E+00	As is
Hydraulic fluid	kg	1.38E-02	
Greases	kg	1.71E-03	
Motor oil	kg	3.39E-02	
Waxes (sealant)	L	3.02E-01	
Paint	L	2.86E-03	
Wrapping material - packaging	kg	4.60E-01	
Strap Protectors - packaging	kg	8.34E-02	
Strapping - packaging	kg	2.00E-01	
Spacers - packaging	kg	4.67E+00	
Emissions to air	Unit/m ³	Value	
Acetaldehyde	kg	2.84E-03	
Carbon monoxide	kg	1.02E-02	
Formaldehyde	kg	4.48E-03	
Hexane	kg	2.23E-04	
Lead	kg	6.51E-08	
Methanol	kg	1.17E-01	

Nitrogen oxides	kg	1.302E-02	
PM2.5	kg	5.022E-02	
PM10	kg	1.004E-01	
Particulates, unspecified	kg	1.181E-01	
Phenol	kg	4.422E-05	
Propionaldehyde	kg	3.838E-03	
VOCs	kg	4.641E-01	
Waste to treatment	Unit/m³	Value	
Waste to inert landfill	kg	8.639E-01	
Waste to recycling	kg	3.954E-01	

^a Mass allocation approach.

7.5 Material Flows

To evaluate data quality, a weighted-average mass balance of the PNW LVL plants was performed (Table 8). In performing the mass balance for LVL, all unit processes located within the site system boundary were considered. Veneer usage was 585 OD kg for PNW mills, and 23 OD kg of binding agents from the resin system produced 1.0 m³ (543 OD kg on average) of LVL along with some coproducts (65 OD kg). PF resin made up most of the resin system. Based on the low and similar values calculated for production-weighted coefficient of variation (CoVw) for the final product, LVL shows good consistency between production facilities at 2.9% for the PNW. In addition, the CoVw for total feedstock is 4.1% for the PNW.

Table 8. Mass balance of PNW LVL manufacturing per cubic meter.

	Pacific Northwest		
	Inputs		
	(OD kg)	Mass (%)	CoVw ^a (%)
Feedstocks			
Purchased veneer	585	96.3	4.1
Total	585	96.3	4.1
Resin system			
PF resin	17.8	2.9	8.3
Sodium hydroxide	3.2	0.5	
Catalyst	0.2	0.0	
Melamine	1.6	0.3	
Total	23	3.7	13.7
Total inputs	608	100	
	Outputs		
	(OD kg)	Mass (%)	CoVw ^a (%)
Products			
LVL	543	89.3	2.9
Coproducts			
Sawdust, sold	53	8.7	15
Panel trim, sold	3.4	0.5	126
Lay-up scrap	2.9	0.5	–
Tested LVL, used	5.9	1.0	–
Total	65	10.7	46
Total outputs	608	100	

^a Production weight-averaged coefficient of variation.

7.6 On-Site Energy Inputs

Weighted-average energy inputs consumed at the LVL manufacturing site were developed from survey data (Table 9). Electricity and natural gas were the primary energy inputs at 77.4 kWh and 14.5 m³ for the PNW per m³ of LVL. The production-weighted coefficient of variation showed large variation for electricity consumption for the PNW at 61%.

Table 9. Weighted-average on-site energy inputs for PNW LVL manufacturing

	Pacific Northwest		
	Quantity	Unit	CoVw (%) ^a
Energy inputs			
Electricity	77.4	kWh	61%
Natural gas	12.8	m ³	11%
Diesel	0.35	L	37%
Propane	0.48	L	52%
Gasoline	0	L	

^a Production-weighted coefficient of variation.

8 LIFE-CYCLE INVENTORY DATA

Cradle-to-gate LCI results for LVL are presented in three life stages, (1) forestry operations, (2) veneer production, and (3) LVL production. The majority of raw material energy consumption occurs during veneer production, followed by LVL production with only a very small portion arising from forestry operations (Table 10). Wood fuel was burned primarily on site at the veneer production facility to generate thermal energy for log conditioning and drying and pressing veneers (Wilson and Dancer 2005; Bergman and Bowe 2011; Puettmann et al 2015). Coal for veneer and LVL at 25.9 and 14.5 kg/m³ was used primarily to generate electricity. Natural gas was consumed primarily for thermal energy for hot-pressing the LVL billets for setting and curing the resin. For dry veneer production, wood fuel was consumed at a rate of 225 kg/m³.

Table 10. Raw material primary energy consumption per one cubic meter of cradle-to-gate LVL, PNW, mass allocation.

Fuel	Unit	Total	Forestry operations	Dry veneer production	LVL production
Wood fuel	OD kg	2.25E+02	0.00E+00	2.24E+02	1.19E+00
Gas, natural, in ground	kg	3.50E+01	1.71E-01	1.32E+01	2.16E+01
Coal, in ground	kg	4.06E+01	1.89E-01	2.59E+01	1.45E+01
Uranium oxide, in ore	kg	8.34E-04	4.44E-06	5.44E-04	2.86E-04
Oil, crude, in ground	kg	1.73E+01	3.23E+00	7.54E+00	6.50E+00

Table 11 shows CPEC for cradle-to-gate production of PNW LVL. Veneer life-cycle stage consumed the most primary energy at 6,750 MJ/m³ (75.3%). Most of the primary energy was derived from wood fuel at 4.71 GJ/m³ and natural gas at 1.89 GJ/m³ with cumulative energy consumption for all three life-cycle stages at 8.97 GJ/m³. Coal consumption was third at 1.06 GJ/m³ (11.9%) and came from generating electricity. Adding other renewable energy sources of hydro and wind to wood fuel makes a total of

54.7% of cumulative energy consumption. This study allocates primary energy to LVL and coproducts on mass. Primary energy is energy embodied in the original resources such as crude oil and coal before conversion.

Table 11. Cumulative primary energy consumption per one cubic meter of cradle-to-gate LVL, PNW, mass allocation.

Fuel	Percentage	Total	Forestry operations	Veneer production	LVL production
		MJ/m ³			
Wood fuel	52.5	4.71E+03	0.00E+00	4.68E+03	2.50E+01
Gas, natural, in ground	21.1	1.89E+03	9.31E+00	7.10E+02	1.17E+03
Coal, in ground	11.9	1.06E+03	4.95E+00	6.77E+02	3.81E+02
Oil, crude, in ground	8.8	7.86E+02	1.47E+02	3.43E+02	2.96E+02
Uranium oxide, in ore	3.5	3.18E+02	1.69E+00	2.07E+02	1.09E+02
Hydro	1.8	1.63E+02	3.65E-03	1.07E+02	5.61E+01
Wind	0.2	1.84E+01	0.00E+00	1.21E+01	6.29E+00
Solar	0.0	8.87E-01	0.00E+00	5.84E-01	3.03E-01
Geothermal	0.2	1.41E+01	0.00E+00	9.28E+00	4.81E+00
Total	100.0	8.97E+03	1.63E+02	6.750E+03	2.05E+03
Total, by percent		100%	1.8%	75.3%	22.9%

Wood products typically consume more energy during the manufacturing stage than at any other stage (Puettmann and Wilson 2005; Winistorfer et al 2005; Puettmann et al 2010). One issue found conducting the cradle-to-gate LCA of LVL was the greater cradle-to-gate CPEC in this PNW LVL study. In this study, CPEC of LVL production for the United States was higher than the CPEC from earlier CORRIM studies (Puettmann and Wilson 2005; Wilson and Dancer 2005) as well as from a more recent Canadian LVL LCA (ASMI 2013). To compare with an earlier CORRIM study on making one cubic meter of LVL in the PNW, cumulative allocated energy consumption was 6.64 GJ/m³ with biomass energy of 46.1% (Puettmann and Wilson 2005; Wilson and Dancer 2005; Puettmann et al 2013). As in this study, Wilson and Dancer (2005) used mass allocation. A similar study in Canada reported cumulative energy consumption for LVL of 4.11 GJ/m³ with biomass energy of 15.8% (ASMI 2013). For the Canadian LVL LCA, veneer production was embedded into LVL production as a whole. Therefore, there was no discernable way to determine which process, veneer or LVL production, consumed the woody biomass. Additionally, GW impact of 147 kg CO₂-eq/m³ was estimated (ASMI 2013). Electricity consumed for the Canadian production of LVL was dominated by hydropower. Biomass energy for this study at 52.5% is more consistent with CORRIM Phase I than the later Canadian LCL study.

Two scenario analyses conducted indicated that LVL production itself was a minor contributor to the overall process because veneer production largely outweighed LVL production in terms of energy inputs. As for energy inputs for LVL production itself, one possible explanation is the greater use of ECDs other than baghouses becoming more prevalent because of increased regulatory controls in the United States since the 2000s, which was when Phase I survey data were collected. Kaestner (2015) explored the changes in emission regulations for boilers and heaters (USEPA 2014) and showed that tightened emission regulations paralleled higher consumption of energy sources such as electricity and natural gas. In addition, tightened emission regulation affected the upstream processes such as veneer drying, which had ECDs like RCOs attached to decrease drying emissions.

Air emission data were collected from surveyed mill data that was augmented by secondary resources (Baldwin 1995; USEPA 2002). As mentioned previously, baghouses are the primary collectors of

particulate matter with all four surveyed plants using that ECD. LVL manufacturers reported on-site air emissions (Table 7) including particulate PM_{2.5} (<10 µm) and particulate PM₁₀ (<10 µm) that are emitted during pressing, sawing, and trimming. Other air emissions include VOCs from pressing. Table 12 lists emissions greater than 10⁻⁴ and HAPs generated from LVL production along with the ones reported by the mills themselves. Fossil and biogenic CO₂ released in the production of one cubic meter of LVL were 199 and 397 kg, respectively. A complete list of all air emissions for the cradle-to-gate production of LVL can be found in Appendix C.

Table 12. Air emissions released per one cubic meter of LVL, cradle-to-gate, PNW, mass allocation.^a

Air emissions	Total	Forestry operations	Veneer production	LVL production
	kg/m ³			
Acetone	1.06E-02	0.00E+00	1.06E-02	0.00E+00
Acrolein	1.75E-03	5.21E-06	1.73E-03	1.35E-05
Aldehydes, unspecified	6.94E-04	1.31E-04	3.17E-04	2.45E-04
Ammonia	3.12E-03	8.74E-05	2.86E-03	1.70E-04
Benzene	1.97E-02	5.25E-05	1.25E-02	7.13E-03
BTEX ^b	1.19E-02	5.98E-05	4.57E-03	7.29E-03
Carbon dioxide	2.10E+00	2.81E-02	7.37E-02	2.00E+00
Carbon dioxide, biogenic	3.97E+02	8.16E-03	3.95E+02	2.51E+00
Carbon dioxide, fossil	1.97E+02	1.03E+01	1.07E+02	7.96E+01
Carbon monoxide	2.54E-02	3.86E-06	9.73E-03	1.57E-02
Carbon monoxide, biogenic	1.01E+00	0.00E+00	1.01E+00	3.29E-03
Carbon monoxide, fossil	4.03E-01	9.46E-02	1.86E-01	1.22E-01
Cumene	1.10E-02	1.35E-12	5.92E-04	1.04E-02
Dinitrogen monoxide	2.72E-03	1.75E-04	1.56E-03	9.88E-04
Formaldehyde	8.86E-03	6.67E-05	4.63E-03	4.17E-03
HAPs	1.13E-03	0.00E+00	1.13E-03	6.40E-06
Heat, waste	1.21E+01	0.00E+00	1.27E+00	1.09E+01
Hexane	1.99E-04	1.70E-11	4.24E-10	1.99E-04
Hydrocarbons, unspecified	6.77E-03	1.36E-06	1.67E-04	6.60E-03
Hydrogen chloride	2.10E-02	1.06E-04	1.37E-02	7.21E-03
Hydrogen fluoride	2.58E-03	1.24E-05	1.68E-03	8.93E-04
Isoprene	3.43E-02	2.05E-04	2.22E-02	1.18E-02
Magnesium	1.90E-04	9.11E-07	1.23E-04	6.58E-05
Methane	6.24E-01	1.42E-02	2.78E-01	3.32E-01
Methane, biogenic	4.02E-03	0.00E+00	4.00E-03	2.27E-05
Methane, fossil	7.09E-02	1.08E-03	2.81E-02	4.17E-02
Methanol	1.21E-01	0.00E+00	1.26E-02	1.09E-01
Nitrogen oxides	1.13E+00	1.87E-01	7.51E-01	1.94E-01
NMVOC ^c	5.44E-02	6.36E-03	1.81E-02	2.99E-02
Organic substances, unspecified	8.18E-04	5.14E-07	7.65E-04	5.32E-05
Particulates, <10 µm	2.53E-01	0.00E+00	1.63E-01	9.02E-02
Particulates, <2.5 µm	1.31E-01	0.00E+00	8.60E-02	4.51E-02
Particulates, >10 µm	5.97E-04	0.00E+00	4.57E-04	1.39E-04
Particulates, >2.5 µm, and <10 µm	2.24E-02	5.74E-03	1.07E-02	5.96E-03
Particulates, unspecified	1.70E-01	1.04E-03	3.92E-02	1.29E-01

Phenol	3.36E-04	4.07E-12	2.61E-04	7.42E-05
Propanal	3.44E-03	9.67E-11	9.24E-06	3.43E-03
Propene	4.29E-03	1.45E-04	3.26E-04	3.82E-03
Radionuclides (including radon)	1.19E-03	6.31E-06	7.73E-04	4.07E-04
Sulfur dioxide	1.40E+00	6.82E-03	6.89E-01	7.09E-01
Sulfur monoxide	4.00E-02	1.04E-02	2.65E-02	3.07E-03
Sulfur oxides	1.98E-02	1.33E-04	1.10E-03	1.86E-02
VOC	6.64E-01	5.02E-03	2.21E-01	4.38E-01
Wood (dust)	1.19E-01	0.00E+00	1.18E-01	6.55E-04

^a Due to large amount of air emissions, emissions greater than 10⁻⁴ and HAPs generated from LVL production are shown. A complete list of all air emissions can be found in Appendix B.

^b BTEX (benzene, toluene, ethylbenzene, and xylene), unspecified ratio.

^c Nonmethane VOCs, unspecified origin.

All waterborne emissions occurred off site (Table 13). LVL plants are zero-discharge facilities. A value of 9.89 kg/m³ LVL unspecified suspended solids was estimated followed by chloride value of 7.67 kg/m³. For unspecified suspended solids, most of the emissions came from natural gas extraction and crude oil production followed by sodium hydroxide production, which is used in resin production. Most of the chloride emissions were from the same sources, except the third source was uranium fuel storage instead of sodium hydroxide production.

Table 13. Emissions to water released per one cubic meter of LVL, cradle-to-gate, PNW, mass allocation.^a

Water emissions	Total	Forestry operations	Dry veneer production	LVL production
	kg/m ³			
Aluminium	8.49E-03	1.05E-03	3.71E-03	3.73E-03
Ammonia	3.08E-03	2.28E-04	1.29E-03	1.57E-03
Ammonium, ion	2.17E-04	5.04E-08	2.12E-04	5.30E-06
Barium	1.16E-01	1.43E-02	4.96E-02	5.23E-02
Bentazone	5.77E-12	0.00E+00	0.00E+00	5.77E-12
Benzene	1.83E-02	2.05E-05	1.11E-03	1.72E-02
Benzoic acid	2.15E-04	1.24E-05	8.68E-05	1.16E-04
BOD ₅	2.08E-01	2.24E-03	2.46E-02	1.81E-01
Boron	6.66E-04	3.84E-05	2.68E-04	3.60E-04
Bromide	4.55E-02	2.62E-03	1.83E-02	2.46E-02
Calcium	6.82E-01	3.93E-02	2.75E-01	3.68E-01
Chloride	7.67E+00	4.42E-01	3.09E+00	4.14E+00
Chromium	1.78E-04	2.79E-05	6.77E-05	8.20E-05
COD ^b	2.39E-01	4.24E-03	3.55E-02	1.99E-01
Cumene	2.63E-02	0.00E+00	1.42E-03	2.49E-02
Detergent, oil	2.02E-04	1.03E-05	8.09E-05	1.11E-04
DOC ^b	4.86E-02	4.03E-13	2.62E-03	4.59E-02
Fluoride	9.66E-04	8.13E-04	1.00E-04	5.28E-05
Iron	2.03E-02	2.09E-03	8.72E-03	9.46E-03
Lithium	1.65E-01	8.38E-04	6.31E-02	1.01E-01
Magnesium	1.33E-01	7.69E-03	5.37E-02	7.20E-02
Manganese	5.17E-04	1.37E-05	2.83E-04	2.20E-04

Metallic ions, unspecified	2.52E-04	6.16E-12	6.68E-10	2.52E-04
Oils, unspecified	4.50E-03	2.82E-04	1.83E-03	2.38E-03
Phosphate	6.33E-04	6.11E-04	0.00E+00	2.17E-05
Propene	9.70E-03	0.00E+00	5.24E-04	9.18E-03
Radioactive species, nuclides, unspecified	1.37E+03	7.32E+00	8.96E+02	4.72E+02
Silver	4.45E-04	2.57E-05	1.79E-04	2.40E-04
Sodium	2.16E+00	1.25E-01	8.71E-01	1.17E+00
Solved solids	3.12E-04	0.00E+00	1.42E-05	2.98E-04
Strontium	1.16E-02	6.68E-04	4.66E-03	6.25E-03
Sulfate	3.48E-02	9.93E-04	1.88E-02	1.50E-02
Sulfur	5.63E-04	3.25E-05	2.27E-04	3.04E-04
Suspended solids, unspecified	9.89E+00	5.78E-01	3.93E+00	5.38E+00
TOC ^b	4.86E-02	0.00E+00	2.62E-03	4.59E-02
Toluene	3.37E-04	1.94E-05	1.36E-04	1.82E-04
Wastewater/m ³	6.87E-04	0.00E+00	0.00E+00	6.87E-04
Xylene	1.76E-04	1.04E-05	7.11E-05	9.48E-05
Zinc	2.13E-04	2.42E-05	9.40E-05	9.44E-05

^aDue to large amount of water emissions, emissions greater than 10⁻⁴ and HAPs generated from LVL production are shown. A complete list of all water emissions can be found in Appendix B.

^bCOD, chemical oxygen demand, DOC, dissolved organic carbon; TOC, total organic carbon.

Solid emissions include ash generated at the wood boiler during veneer production and in the upstream processes, primarily fuels and resins, used in LVL production (Table 14). A total of 9.15 kg/m³ solid waste was generated, of which 0.353 kg/m³ was recycled (Table 15). Overall, 96% of the solid waste generated was landfilled.

Table 14. Waste to treatment per one cubic meter of LVL, cradle-to-gate, PNW, mass allocation.

Waste to treatment	Total	Forestry operations	Veneer production	LVL production
	kg/m ³			
Waste in inert landfill	8.79E+00	0.00E+00	8.02E+00	7.72E-01
Waste to recycling	3.53E-01	0.00E+00	0.00E+00	3.53E-01
Total waste	9.15E+00	0.00E+00	8.02E+00	1.13E+00

9 LIFE-CYCLE IMPACT ASSESSMENT

In addition, energy and material resource consumption values and the waste generated are also provided. Environmental performance results for GW, acidification, eutrophication, ozone depletion, smog, energy consumption from nonrenewables and renewables (wind, hydro, solar, geothermal, and nuclear fuels), renewable and nonrenewable resource consumption, and solid waste are shown in Table 15. Values in Table 15 are the cumulative impact of all upstream processes required for LVL production including those from forestry, production of veneer, plywood, resin, and packaging, and transportation energy required to move these materials to the LVL facility. For example, differences between LVL production data in Table 7 and data in Table 15 are a result of the resources and fuels used in the upstream processes, i.e. fresh water use. In addition, the contribution of major substances to the overall impact from eutrophication, acidification, smog, and global warming categories are provided in Appendix D. A

corresponding LCA update for cradle-to-gate LVL in the southeastern United States showed a similar conclusion (Bergman and Alanya-Rosenbaum 2016b).

Table 15. Environmental performance of one cubic meter LVL, cradle-to-gate, PNW.

Impact category	Unit	Total	Forestry operations	Veneer production	LVL production
Global warming	kg CO ₂ e	2.18E+02	1.08E+01	1.16E+02	9.12E+01
Acidification	kg SO ₂ e	2.29E+00	1.49E-01	1.26E+00	8.75E-01
Eutrophication	kg Ne	7.70E-02	1.03E-02	3.78E-02	2.89E-02
Ozone depletion	kg CFC-11e	4.75E-07	4.87E-10	8.67E-09	4.66E-07
Smog	kg O ₃ e	3.12E+01	4.67E+00	1.98E+01	6.74E+00
Total primary energy consumption	Unit	8.97E+03	1.63E+02	6.75E+03	2.05E+03
Nonrenewable fossil	MJ	3.74E+03	1.61E+02	1.73E+03	1.85E+03
Nonrenewable nuclear	MJ	3.18E+02	1.69E+00	2.07E+02	1.09E+02
Renewable (solar, wind, hydroelectric, and geothermal)	MJ	1.96E+02	3.65E-03	1.29E+02	6.75E+01
Renewable, biomass	MJ	4.71E+03	0.00E+00	4.68E+03	2.50E+01
Material resources consumption (nonfuel resources)	Unit	Total	Forestry operations	Veneer production	LVL production
Nonrenewable materials	kg	5.11E+00	0.00E+00	5.11E+00	5.47E-05
Renewable materials	kg	8.62E+02	0.00E+00	8.57E+02	4.87E+00
Fresh water	L	1.22E+03	1.03E+01	8.76E+02	3.36E+02
Waste generated	Unit	Total	Forestry operations	Veneer production	LVL production
Solid waste	kg	9.15E+00	0.00E+00	8.02E+00	1.13E+00

10 COMPARISON OF UPDATED LCI WITH A PREVIOUS STUDY

We compared the energy inputs from the current 2012 study to the earlier CORRIM Phase I study to show how the CPEC for PNW LVL was affected. As expected from the higher CPEC found earlier, the on-site energy inputs were substantially higher than for Phase I (Wilson and Dancer 2005; Puettmann et al 2013). In particular, electricity and natural gas consumption is driving the total impact from energy with changes of 30% and 279%, respectively (Table 16). Therefore, a sensitivity analysis investigating the energy inputs into LVL production was completed in Section 14 to determine their overall impact. However, the apparent statistical differences between the older and current studies could not be adequately addressed because no statistical description of the data from the earlier study was available. However, there was sufficient reason to attempt to quantify the energy impacts associated with LVL production.

Table 16. Production-weighted average PNW on-site energy inputs for manufacturing one cubic meter LVL.

	Pacific Northwest Phase I	Pacific Northwest 2012		
Source	Quantity	Quantity	Unit	Change (%)
Electricity	59.5	77.4	kWh	30
Natural gas	3.83	12.8	m ³	234
Diesel	0.169	0.351	L	108
Propane	0.250	0.477	L	91

11 TREATMENT OF BIOGENIC CARBON

Treatment of biogenic carbon is consistent with the Intergovernmental Panel for Climate Change (IPCC 2006) inventory reporting framework in that there is no assumption that biomass combustion is carbon neutral. Instead, net carbon emissions from biomass combustion are accounted for under the Land-Use Change and Forestry (LUCF) Sector and are therefore ignored in energy emissions reporting for product LCAs to prevent double counting. Standards such as ASTM D 7612 (2010), which are used in North America to define legal, responsible, and/or certified sources of wood materials, are in place to provide assurances regarding forest regeneration and sustainable harvest rates that serve as proxies to ensure stable carbon balances in the forest sector. They are outside the accounting framework of this LCA.

This approach to the treatment of biogenic carbon was taken for the Norwegian Solid Wood Product PCR (Aasestad 2008), and the North American PCR (FPInnovations 2013) has adopted an identical approach to ensure comparability and consistency. The North American PCR approach was followed here for GW impact reporting. Therefore, the default TRACI impact assessment method was used. This default method does not count the CO₂ emissions released during the combustion of woody biomass during production. Other emissions associated with wood combustion, e.g. methane or nitrogen oxides, do contribute to and are included in the GW impact category. Bare (2011) provides a complete list of emission factors for the GW impact method used. With this method, total CO₂ emissions of 207.2 kg were released, in the production of one cubic meter of LVL for the PNW (Table 17). That same one cubic meter of LVL stores 959¹ kg CO₂e.

Table 17. Carbon balance per one cubic meter LVL, PNW.

Carbon source	kg CO ₂ equivalent
Released forestry operations	10.8
Released manufacturing	207.2
CO ₂ e stored in product	958.7

12 LIFE-CYCLE INTERPRETATION

As defined by ISO (2006), life-cycle interpretation is the phase of the LCA in which the findings of either the LCI or the LCIA, or both, are combined consistent with the defined goal and scope to reach conclusions and recommendations. This phase in the LCA reports the significant issues based on the results presented in the LCI and LCIA of this report. Additional components report an evaluation that considers completeness, sensitivity, and consistency checks of the LCI and LCIA results and conclusions, limitations, and recommendations.

12.1 Identification of Significant Issues

The objective of this element is to structure the results from the LCI or LCIA phases to help determine the significant issues found in the results and presented in previous sections of this report. A contribution analysis was applied for the interpretation phase of this LCA study. Contribution analysis examines the

¹ 543 OD kg of wood in LVL x 0.963 × (0.5 kg carbon/1.0 OD kg wood) × (44 kg CO₂/kmole/12 kg carbon/kmole) = 958.7 kg CO₂ eq.

contribution of life-cycles stages, unit process contributions in a multiunit manufacturing process, or specific substances that contribute to particular impact categories.

12.2 Life-Cycle Phase Contribution Analysis

Allocation was performed using both mass and economic methodologies to investigate the influence of the allocation method on the results. The contribution of five life-cycle stages to the LCA results for mass and economic allocation are provided in Table 18. Overall, the cradle-to-gate environmental impacts from LVL production for the five impact categories taken into consideration were similar, with a difference of about 1% to 10%.

Table 18. Life-cycle stages contribution analysis of one cubic meter LVL, cradle-to-gate.

Mass allocation				
Impact category	Unit	Forestry operations (%)	Veneer production (%)	LVL production (%)
Global warming	kg CO ₂ eq	5.0	53.2	41.9
Acidification	kg SO ₂ eq	6.5	55.2	38.3
Eutrophication	kg N eq	13.3	49.1	37.6
Ozone depletion	kg CFC-11 eq	0.1	1.8	98.1
Smog	kg O ₃ eq	15.0	63.4	21.6
Economic allocation				
Total primary energy consumption	Unit	Forestry operations (%)	Veneer production (%)	LVL production (%)
Global warming	kg CO ₂ eq	4.9	49.0	46.1
Acidification	kg SO ₂ eq	6.5	51.1	42.5
Eutrophication	kg N eq	13.3	45.0	41.8
Ozone depletion	kg CFC-11 eq	0.1	0.4	99.5
Smog	kg O ₃ eq	15.1	60.5	24.4

12.3 Substance Contribution Analysis

The contribution of substances released to GWP is presented in Table 19. Substance contribution analysis to GW (kg CO₂e) by life-cycle stage (total percentage basis and values).. The major substances that contribute to GWP for the five life-cycle stages of LVL manufacturing include fossil carbon dioxide (CO₂) and methane (CH₃). The results are presented for both mass and economic allocation where CO₂ emissions had the highest contribution.

Table 19. Substance contribution analysis to GW (kg CO₂e) by life-cycle stage (total percentage basis and values).

Substances	Comparison type	Mass allocation				Economic allocation			
		Total (%)	Forestry operations	Veneer production	LVL production	Total (%)	Forestry operations	Veneer production	LVL production
Total of all compartments		100.00	1.08E+01	1.16E+02	9.12E+01	100.00	1.08E+01	1.08E+02	1.02E+02
Carbon dioxide	Air	91.61	1.04E+01	1.08E+02	8.16E+01	91.51	1.04E+01	1.01E+02	9.12E+01
Methane	Air	8.02	3.81E-01	7.74E+00	9.34E+00	8.12	3.81E-01	7.12E+00	1.04E+01
Other substances	Air	<1	5.22E-02	4.65E-01	2.95E-01	<1%	5.22E-02	4.36E-01	3.30E-01

12.4 Completeness, Sensitivity, and Consistency Checks

Evaluating the LCAs completeness, sensitivity, and consistency offers confidence in and reliability of the LCA results. The completeness check process verifies whether information from the life-cycle phases of an LCA are sufficient for reaching the goals and scope and conclusions of the study and making sound interpretations of the results. Three life-cycle stages (forestry operations, wood material production, and LVL production) were checked for data completeness including all input elements such as raw and ancillary materials input, energy input, transportation scenarios, water consumption, and outputs such as products and coproducts, emissions to air, water, and land, and final waste disposals. All input and output data were found to be complete, and no data gaps were identified.

The consistency check process verifies that the assumptions, methods, and data are consistently applied throughout the study and are in accordance with the goal and scope of the LCA. A comprehensive review process was completed for this LCA to make certain consistency was applied to the assumptions made, methods used, models, data quality including data sources, data accuracy, age, time-related coverage, technology, and geographical coverage.

Sensitivity analysis can be applied to the LCA to determine changes in results caused by variations in assumptions, methods, and data. Sensitivity analysis is a systematic approach for estimating the effects of the choices made concerning methods and data on the outcome of a study. Sensitivity analysis is a key component of data quality analysis and can be applied to quantify the impact of changes in assumptions or input data on study results. A sensitivity analysis was completed per ISO 14040 standards (ISO 2006a, 2006b) to model the effects of natural consumption and electricity consumption for LVL production. Sensitivity analysis can be useful to understand how various process parameters contribute to environmental output factors.

12.5 Cumulative Primary Energy Consumption

During LVL manufacturing, natural gas is used for curing resin. Changing the consumption of natural gas may have a significant effect on CPEC and GHG emissions. Lower (-20%) and higher (+20%) natural gas consumptions were selected to compare with the baseline fuel mix developed from the mill survey data. Although the usage changed by 20%, the outcomes changed approximately 2.5% and 1.1% for GHG emissions and CPEC, respectively (Table 20).

Table 20. Key parameters on changing natural gas consumption during LVL production.

Parameter	Unit	Low (-20%)	Surveyed (0%)	High (+20%)
		Values		
GHG emissions	kg CO ₂ e	212.15	218	223
CPEC	GJ	8.85	8.97	9.05

12.6 Electricity Consumption

During LVL manufacturing, electricity is used for motors including sawing and trimming. However, changing electricity consumption by 20% affects the outcomes less than 4% and 1.6% for GHG emissions and CPEC, respectively (Table 21).

Table 21. Key parameters on changing electricity consumption during LVL production.

Parameter	Unit	Low (-20%)	Surveyed (0%)	High (+20%)
		Values		
GHG emissions	kg CO ₂ e	210	218	225
CPEC	GJ	8.81	8.97	9.10

Although energy inputs reported for 2012 appear to be higher than CORRIM Phase I, the impacts of this difference in the LVL production process were small compared with energy impacts associated with dry veneer production (Table 11). As shown, neither natural gas nor electrical consumption on site had a substantial impact on the overall process because dry veneer production contributed roughly 75% of cradle-to-gate LVL production CPEC.

13 CONCLUSION, LIMITATIONS, AND RECOMMENDATIONS

The cradle-to-gate LCA for LVL includes (1) the LCI of forest resources, which relies on secondary data, (2) the LCI of dry veneer production, which is used as an input into LVL and relies on primary survey data and secondary data for process inputs such as natural gas, diesel, and electricity, and (3) the LVL manufacturing LCI, which relies on primary survey data and secondary data for process inputs such as natural gas, residual fuel oil, diesel, and electricity. The survey results for LVL were representative of the PNW region of the United States. The survey data were representative of LVL sizes and production volumes consistent with trade association production data.

Amount and type of energy has a substantial role during production of building materials such as LVL. Total CPEC for the cradle-to-gate production of PNW LVL was 8.97 GJ/m³. Renewable biomass, by far the largest renewable energy source, represented 52.5% of the total cumulative energy consumption for all stages of production. Renewable energy consumption was strongly driven by veneer production. Nonrenewable energy for LVL production was strongly driven by fossil fuels. As for the other two life-cycle stages, forestry operations consumed relatively little energy and was exclusively fossil fuels, which came out to about 1.8% of the total cumulative energy consumption. In addition, the veneer production stage consumed slightly less nonrenewable fossil fuel (46%) than the production of LVL itself (49%). Energy consumed during PF resin production along with the additives of the resin system was included in the fossil fuel use for LVL as an upstream process. In summary, to produce one cubic meter of PNW LVL from cradle-to-gate, 52.5% of the cumulative energy was from biomass (wood fuel) and 41.8% from nonrenewable fossil fuels, leaving a small portion of energy needs coming from nuclear (3.5%) and the remaining 1.8% from hydro, wind, solar, and geothermal.

Emissions from the forest resources LCI are small relative to manufacturing emissions (veneer and LVL). At the LVL production facility, emissions originate at the boiler and during hot-pressing and sawing. Boiler emissions released are a function of the fuel burned, whereas other emissions are a function of the unit process and associated ECD. Cradle-to-gate LCI results showed that 199 kg fossil CO₂ were released in the production of one cubic meter of PNW LVL. Carbon content for wood products is assumed to be 50% by mass of OD wood. Excluding the resin system, the carbon stored in the wood portion of one cubic meter of LVL on a production-weighted average is equivalent to 959 kg CO₂ emissions if left to decay.

Data quality was high. A wood mass balance was performed to verify data quality. Inputs and outputs were consistent for the four surveyed mills on a cubic meter basis. Difference for overall wood mass was less than 2% for both regions. Any difference less than 10% would be good. Therefore, tracking of wood mass was excellent for this study.

Specific wood production LCA data such as LVL can be used for several purposes. One purpose is to construct cradle-to-gate LCAs for other products. For example, LVL production LCA data developed in this study can be linked as an input to develop an LCA for I-joist production. Secondly, product production companies can explore potential process improvements in conjunction with new conversion technologies to identify potential environmental hotspots. Thirdly, LCA practitioners can use the data for their studies and product customers can use the data (perhaps in the eventual form of an EPD) to assist in product selection along with building specifiers looking for green building products with documentation. Fourthly, developed wood product LCI data can contribute to product LCAs that are then incorporated into whole-building LCAs in environmental footprint software. Lastly, the gate-to-gate LVL production data can be included or used to update current LCI data found in LCI databases.

14 REFERENCES

- Aasestad K (2008) The Norwegian emission inventory 2008. Documentation of methodologies for estimating emissions of greenhouse gases and long-range transboundary air pollutants. Statistisk sentralbyrå. Report 2008/48: 252 pp.
- APA (2014) Engineered wood statistics: Third quarter 2014. APA—The Engineered Wood Association. Tacoma, WA. 9 pp.
- ASMI (2013) A cradle-to-gate life cycle assessment of Canadian laminated veneer lumber (LVL) manufacture. Athena Sustainable Materials Institute, Ottawa, Ontario, Canada. 39 pp.
- ASMI (2016) Athena impact estimator for buildings. <http://www.athenasmi.org/our-software-data/impact-estimator>. Athena Sustainable Material Institute, Ottawa, Ontario, Canada. (3 September 2015).
- ASTM International (2010) ASTM D 7612-10. Standard practice for categorizing wood and wood-based products according to their fiber source. American Society for Testing and Materials, West Conshohocken, PA. pp. 783-793.
- ASTM International (2014) ASTM D 5456-14b. Standard specification for evaluation of structural composite lumber products. American Society for Testing and Materials, West Conshohocken, PA. 33 pp.
- Baldwin RF (1995) Plywood and veneer-based products: Manufacturing practices. Forest Products Society, Madison, WI. 388 pp.
- Bare JC (2011) TRACI 2.0: The tool for the reduction and assessment of chemical and other environmental impacts 2.0. Clean Technol Environ 13:687-696.
- Bergman RD, Alanya-Rosenbaum S (2016a) Cradle-to-gate life-cycle assessment of I-joists produced in Pacific Northwest region of the United States. CORRIM Final Report. Module F1. University of Washington, Seattle, WA. (*In process*). <http://www.corrim.org/pubs/reports.asp>
- Bergman RD, Alanya-Rosenbaum S (2016b) Cradle-to-gate life-cycle assessment of laminated veneer lumber (LVL) produced in the southeastern region of the United States. CORRIM Final Report. Module H1. University of Washington, Seattle, WA. (*In process*). <http://www.corrim.org/pubs/reports.asp>
- Bergman RD, Bowe SA (2011) Life-cycle inventory of manufacturing prefinished engineered wood flooring in the eastern United States with a comparison to solid strip wood flooring. Wood Fiber Sci 43(4):421-441.
- Bergman RD, Taylor AM (2011) Environmental product declarations of wood products—An application of life cycle information about forest products. Forest Prod J 61(3):192-201.
- CORRIM (2014) Research guidelines for life-cycle inventories (draft). Consortium for Research on Renewable Industrial Materials (CORRIM), Inc., University of Washington, Seattle, WA. 40 pp.
- FPInnovations (2015) Product category rule (PCR): For preparing an environmental product declaration (EPD) for North American structural and architectural wood products. UN CPC 31. NAICS 321. <https://fpinnovations.ca/ResearchProgram/environment-sustainability/epd-program/Documents/pcr-v2.pdf> (16 March 2016).
- Goemans C (2010) Athena Institute, National Renewable Energy Laboratory, US LCI Database – North American electricity generation by fuel type update and template methodology. <http://www.nrel.gov/lci/database/>.
- Hodgman CD (1955) Handbook of chemistry and physics. 37th edition 1955-1956. Chemical Rubber Publishing Co., Cleveland, Ohio. 3156 pp.
- ILCD (2010) International reference life cycle data system (ILCD) handbook - General guide for life cycle assessment—Detailed guidance. EUR 24708 EN. European Commission–Joint Research Centre–Institute for Environment and Sustainability. Luxembourg. Publications Office of the European Union. 417 pp.

- IPCC 2006. Task Force on National Greenhouse Gas Inventories. <http://www.ipcc-nggip.iges.or.jp/faq/faq.html> (September 22, 2016). ISO (2006a) Environmental management—life-cycle assessment—requirements and guidelines. ISO 14044. International Organization for Standardization, Geneva, Switzerland. 46 pp.
- ISO (2006a) Environmental management—Life-cycle assessment—Requirements and guidelines. ISO 14044. International Organization for Standardization, Geneva, Switzerland. 46 pp.
- ISO (2006b) Environmental management—Life-cycle assessment—Principles and framework. ISO 14040. International Organization for Standardization, Geneva, Switzerland. 20 pp.
- ISO (2006c) Environmental labels and declarations—Type III environmental declarations—Principles and procedures. ISO 14025. International Organization for Standardization, Geneva, Switzerland. 25 pp.
- Johnson LR, Lippke BR, Marshall JD, Comnick J (2005) Life-cycle impacts of forest resource activities in the Pacific Northwest and Southeast United States. *Wood Fiber Sci* 37(CORRIM Special Issue):30-46.
- Kaestner D (2015) Life cycle assessment of the oriented strand board and plywood industries in the United States of America. Master's Thesis, University of Tennessee, 2015. 122 pp. http://trace.tennessee.edu/utk_gradthes/3376 (16 March 2016).
- Milota MR (2004) Softwood lumber—Pacific Northwest region. CORRIM Phase I Final Report Module B. University of Washington, Seattle, WA. www.corrim.org/reports/. 75 pp.
- NIST ITL (1996) Weighted standard deviation. National Institute of Standards and Technology Information Technology Laboratory. www.itl.nist.gov/div898/software/dataplot/refman2/ch2/weightsd.pdf. (16 March 2016).
- NREL (2012) Life-cycle inventory database project. National Renewable Energy Laboratory. www.lcacommons.gov/nrel/search. (16 March 2016).
- PRé Consultants (2016) SimaPro 8 life-cycle assessment software package, Version 8. Plotter 12, 3821 BB Amersfoort, the Netherlands. www.pre.nl/. (16 March 2016).
- Puettmann ME, Bergman RD, Hubbard S, Johnson L, Lippke B, Wagner F (2010) Cradle-to-gate life-cycle inventories of US wood products production—CORRIM Phase I and Phase II products. *Wood Fiber Sci* 42 (CORRIM Special Issue):15-28.
- Puettmann M, Kaestner D, Taylor A (2015) Dry veneer and oriented strandboard production life-cycle inventory data. University of Tennessee, Knoxville, TN. Personal communication with M. Puettmann on 13 October 2015.
- Puettmann ME, Milota MR (2015) Wood boiler survey data compilation. Consortium for Research on Renewable Industrial Materials (CORRIM). University of Washington, Seattle, WA (in process).
- Puettmann ME, Oneil EE, Wilson J, Johnson L (2013) Cradle to gate life cycle assessment of laminated veneer lumber production from the Pacific Northwest. Consortium for Research on Renewable Industrial Materials (CORRIM). University of Washington, Seattle, WA. 23 pp.
- Puettmann ME, Wilson JB (2005) Life-cycle analysis of wood products: Cradle-to-gate LCI of residential wood building materials. *Wood Fiber Sci* 37 (Special Issue):18-29.
- Ritter MA, Skog KE, Bergman RD (2011) Science supporting the economic and environmental benefits of using wood and wood products in green building construction. Gen Tech Rep FPL-GTR-206. USDA For Serv Forest Products Laboratory, Madison, WI. 9 pp.
- Salazar J, Meil J (2009) Franklin database. <http://www.fal.com/lifecycle-services.html>. (16 March 2016).
- Smith WB, Miles PD, Vissage JS, Pugh SA (2004) Forest resources of the United States, 2002. Gen Tech Rep NC-241. USDA For Serv North Central Research Station, St. Paul, MN. 137 pp.
- Stark NM, Cai Z, Carll C (2010) Wood-based composite materials: Panel products, glued-laminated timber, structural composite lumber, and wood-nonwood composite materials. In: *Wood handbook—Wood as an engineering material*. Gen Tech Rep FPL-GTR-113. USDA For Serv Forest Products Laboratory, Madison, WI. pp. 11-1–11-28.
- Starr C (1971) Energy and power. *Sci Am* 225(3):37-69.

- Todreas NE, Kazimi MS (1990) Thermal hydraulics fundamentals: Nuclear system. Volume I Page 2, Table 1-1. Taylor & Francis, New York.
- USCB (2012) 2012 North American industry classification system definitions. 321215 Structural wood product manufacturing. United States Census Bureau. www.census.gov/eos/www/naics/ (16 March 2016).
- USEPA (2002) AP 42 Section 10.9 Engineered wood products manufacturing. United States Environmental Protection Agency, Washington, DC. pp. 10.9-1–24. <http://www.epa.gov/ttnchie1/ap42/ch10/final/c10s09.pdf>. (16 March 2016).
- USEPA (2003a) Air pollution control technology fact sheet. EPA-452/F-03-021. Regenerative incinerator. United States Environmental Protection Agency, Washington, DC. 5 pp. <http://www.epa.gov/ttn/catc/dir1/fregen.pdf>. (16 March 2016).
- USEPA (2003b) Air pollution control technology fact sheet. EPA-452/F-03-025. Fabric filter (baghouse). United States Environmental Protection Agency, Washington, DC. 6 pp. <http://www.epa.gov/ttn/catc/dir1/ff-pulse.pdf>. (16 March 2016).
- USEPA (2003c) Air pollution control technology fact sheet. EPA-452/F-03-015. Packed-bed/packed-tower wet scrubber. United States Environmental Protection Agency, Washington, DC. 6 pp. <http://www.epa.gov/ttn/catc/dir1/fpack.pdf>. (16 March 2016).
- USEPA (2014) Industrial commercial institutional boilers and process heaters. United States Environmental Protection Agency, Washington, DC.
- Wilson JB (2009) Resins: A life cycle inventory of manufacturing resins used in the wood composites industry. In: CORRIM Phase II Final Report Module H. January 2009. 103 pp. http://www.corrim.org/pubs/reports/2010/phase2/Module_H.pdf.
- Wilson JB (2010) Life-cycle inventory of formaldehyde-based resins used in wood composites in terms of resources, emissions, energy and carbon. Wood Fiber Sci 42(Special Issue):125-143.
- Wilson JB, Dancer ER (2004) Laminated veneer lumber manufacturing. In CORRIM Phase I Final Report Module H. Life cycle environmental performance of renewable building materials in the context of residential construction. <http://www.corrim.org/reports/>. 92 pp.
- Wilson JB, Dancer ER (2005) Gate-to-gate life-cycle inventory of laminated veneer lumber production. Wood Fiber Sci 37(Special Issue):114-127.
- Winistorfer P, Chen Z, Lippke B, Stevens N (2005) Energy consumption and greenhouse gas emissions related to use, maintenance, and disposal of a residential structure. Wood Fiber Sci 37(Special Issue):128-139.

15 APPENDIX A: CONVERSION FACTORS

Table 22. Common conversions from English to SI units.^a

To convert from	to	multiply by
Cubic feet (ft ³)	Cubic meters (m ³)	0.02831685
Pounds (avdp) (lb)	Kilograms (kg)	0.4535924
Cubic inches (in ³)	Cubic centimeters (cm ³)	16.393
Btu's	Joules (J)	1054
Cubic yards (yd ³)	Cubic meters (m ³)	0.7645549
Feet (ft)	Meters (m)	0.305
Gallons (US) (gal)	Liters (L)	3.785
Kilowatt-hours (kWh)	Megajoules (MJ)	3.6
Miles (mi)	Kilometers (km)	1.609
Ounces (avdp) (oz)	Kilograms (kg)	0.028
Square feet (ft ²)	Square meters (m ²)	0.093
Tons (short)	Kilograms (kg)	907.185
Tons (short)	Metric tons (t)	0.9071847
Pounds (lb)	Metric tons (t)	0.0004
Watts (W)	Joules/second (J/s)	1
Yards (yd)	Meters (m)	0.914
Acres (a)	Hectares (ha)	0.405

^aSources: Starr (1971).

Table 23. Electricity grids and dataset name by region and source.

Region	North American grid	Source
Pacific Northwest	Electricity, at grid, WECC, 2008/RNA U	US LCI database

Table 24. Energy contents and densities of various fuels.

Fuel	HHV ^a MJ/kg	Density	Density units
Coal	26.19		
Distillate fuel oil ^b	45.54	0.85	kg/L
Liquid propane gas	54.05	0.49	kg/L
Natural gas	54.45	0.70	kg/m ³
Residual fuel oil	43.45	0.96	kg/L
Wood	20.93		
Uranium	381,000.00		
Gasoline	48.36	0.72	kg/L
Diesel	44.00	0.88	kg/L

^aHHV: High heating value. Hodgman (1955); Salazar and Meil (2009); Todreas and Kazimi (1990); Used in this study.

^bSame as for crude oil.

16 APPENDIX B: PACIFIC NORTHWEST LVL LIFE-CYCLE INVENTORY FLOWS — MASS ALLOCATION

Table 25. Mass allocation inventory.

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
1	Calcite	Raw	kg	0.00E+00	0.00E+00	1.09E-03
2	Carbon dioxide, in air	Raw	kg	1.13E+03	8.19E+01	7.93E-01
3	Carbon, organic, in soil or biomass stock	Raw	kg	0.00E+00	0.00E+00	1.00E+03
4	Coal, 26.4 MJ per kg	Raw	kg	1.89E-01	2.59E+01	1.45E+01
5	Coal, 26.4 MJ per kg, in ground	Raw	kg	0.00E+00	0.00E+00	7.27E-05
6	Coal, bituminous, 24.8 MJ per kg	Raw	kg	0.00E+00	2.73E-05	8.39E-07
7	Coal, brown	Raw	kg	0.00E+00	2.46E-06	7.55E-08
8	Copper ore	Raw	kg	0.00E+00	0.00E+00	2.20E-03
9	Energy, from biomass	Raw	MJ	0.00E+00	4.54E-06	1.39E-07
10	Energy, from hydro power	Raw	MJ	3.65E-03	1.07E+02	5.61E+01
11	Energy, geothermal	Raw	MJ	0.00E+00	9.28E+00	4.81E+00
12	Energy, kinetic (in wind), converted	Raw	MJ	0.00E+00	1.21E+01	6.29E+00
13	Energy, recovered	Raw	MJ	0.00E+00	3.48E-06	1.07E-07
14	Energy, solar, converted	Raw	MJ	0.00E+00	5.84E-01	3.03E-01
15	Fuel	Raw	m ³	3.36E-03	0.00E+00	0.00E+00
16	Gas, natural, 36.6 MJ per m ³	Raw	m ³	0.00E+00	1.04E-04	3.21E-06
17	Gas, natural, 46.8 MJ per kg	Raw	kg	0.00E+00	1.39E-01	6.26E-06
18	Gas, natural, 46.8 MJ per kg, in ground	Raw	kg	0.00E+00	0.00E+00	1.55E-04
19	Gas, natural, in ground	Raw	m ³	0.00E+00	0.00E+00	5.48E-04
20	Gas, natural/m ³	Raw	m ³	2.43E-01	1.85E+01	3.06E+01
21	Iron ore	Raw	kg	0.00E+00	0.00E+00	3.48E-04
22	Limestone	Raw	kg	0.00E+00	5.11E+00	5.47E-05
23	Limestone, in ground	Raw	kg	0.00E+00	0.00E+00	2.68E-02
24	Nitrogen	Raw	kg	0.00E+00	0.00E+00	1.18E-02
25	Nitrogen, in air	Raw	kg	5.29E-02	0.00E+00	0.00E+00
26	Occupation, arable, conservation tillage	Raw	m ^{2a}	0.00E+00	0.00E+00	3.46E-04
27	Occupation, arable, conventional tillage	Raw	m ^{2a}	0.00E+00	0.00E+00	3.79E-04
28	Occupation, arable, reduced tillage	Raw	m ^{2a}	0.00E+00	0.00E+00	2.32E-04
29	Oil, crude	Raw	kg	3.23E+00	7.54E+00	6.50E+00
30	Oil, crude, 42 MJ per kg	Raw	kg	0.00E+00	6.28E-01	2.81E-06
31	Oil, crude, 42 MJ per kg, in ground	Raw	kg	0.00E+00	0.00E+00	6.23E-04
32	Oil, crude, 42.7 MJ per kg	Raw	kg	0.00E+00	5.45E-05	1.68E-06
33	Oil, crude, in ground	Raw	kg	0.00E+00	0.00E+00	2.48E-03
34	Oxygen	Raw	kg	0.00E+00	1.34E-04	7.96E-06
35	Oxygen, in air	Raw	kg	0.00E+00	7.90E-02	1.39E+00
36	Pesticides	Raw	kg	0.00E+00	0.00E+00	2.28E-07
37	Phosphate ore, in ground	Raw	kg	0.00E+00	0.00E+00	2.17E-05
38	Phosphorus, in ground	Raw	kg	8.96E-03	0.00E+00	0.00E+00
39	Sand, quartz, in ground	Raw	kg	0.00E+00	0.00E+00	2.53E-06
40	Scrap, external	Raw	kg	0.00E+00	0.00E+00	8.87E-02
41	Seed corn	Raw	kg	0.00E+00	0.00E+00	1.22E-06
42	Sodium carbonate, in ground	Raw	kg	0.00E+00	0.00E+00	2.95E-04
43	Sodium chloride	Raw	kg	0.00E+00	4.93E-02	3.73E+00
44	Sodium chloride, in ground	Raw	kg	0.00E+00	0.00E+00	2.89E-04
45	Sodium sulfate	Raw	kg	0.00E+00	0.00E+00	6.91E-04
46	Sodium sulphate, various forms, in ground	Raw	kg	0.00E+00	0.00E+00	9.12E-04
47	Sulfur, in ground	Raw	kg	0.00E+00	0.00E+00	8.64E-05
48	Sylvinite, in ground	Raw	kg	0.00E+00	0.00E+00	1.07E-05
49	Uranium	Raw	kg	0.00E+00	0.00E+00	1.78E-03
50	Uranium oxide, 332 GJ per kg, in ore	Raw	kg	4.44E-06	5.44E-04	2.86E-04
51	Uranium, 2291 GJ per kg	Raw	kg	0.00E+00	2.11E-06	2.07E-11
52	Uranium, 2291 GJ per kg, in ground	Raw	kg	0.00E+00	0.00E+00	2.09E-09
53	Uranium, in ground	Raw	kg	0.00E+00	0.00E+00	8.32E-09
54	Water, cooling, unspecified natural origin/kg	Raw	kg	0.00E+00	1.45E-02	2.54E-01
55	Water, cooling, unspecified natural origin/m ³	Raw	m ³	0.00E+00	1.74E-01	2.18E-01

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
56	Water, process, surface	Raw	kg	0.00E+00	1.98E+02	2.95E+00
57	Water, process, unspecified natural origin/kg	Raw	kg	0.00E+00	2.69E-01	4.71E+00
58	Water, process, unspecified natural origin/m ³	Raw	m ³	0.00E+00	4.38E-05	1.35E-06
59	Water, process, well	Raw	kg	0.00E+00	8.62E+01	6.53E-01
60	Water, process, well, in ground	Raw	kg	0.00E+00	3.35E-02	5.87E-01
61	Water, river	Raw	m ³	0.00E+00	0.00E+00	3.88E-06
62	Water, unspecified natural origin, RoW	Raw	m ³	0.00E+00	2.83E-04	1.61E-06
63	Water, unspecified natural origin, US	Raw	m ³	0.00E+00	4.09E-01	0.00E+00
64	Water, unspecified natural origin/m ³	Raw	m ³	1.03E-02	6.20E-03	1.09E-01
65	Water, well, in ground	Raw	m ³	0.00E+00	0.00E+00	2.24E-05
66	Water, well, in ground, US	Raw	m ³	0.00E+00	2.89E-03	0.00E+00
67	Wood and wood waste, 20.9 MJ per kg, oven-dry basis	Raw	kg	0.00E+00	2.24E+02	1.19E+00
68	Wood and wood waste, 9.5 MJ per kg	Raw	kg	0.00E+00	0.00E+00	8.73E-02
69	Wood for fiber, feedstock	Raw	kg	0.00E+00	0.00E+00	1.87E-01
70	Wood, feedstock	Raw	kg	0.00E+00	0.00E+00	1.99E-01
71	Wood, soft, standing	Raw	m ³	0.00E+00	1.62E+00	9.72E-03
72	Wood, unspecified, standing/kg	Raw	kg	0.00E+00	0.00E+00	1.57E-02
73	2-chloroacetophenone	Air	kg	1.78E-12	4.43E-11	6.96E-10
74	2-methyl-4-chlorophenoxyacetic acid	Air	kg	0.00E+00	0.00E+00	2.28E-11
75	2,4-D	Air	kg	0.00E+00	0.00E+00	1.22E-09
76	5-methyl chrysene	Air	kg	1.82E-12	2.46E-10	1.32E-10
77	Acenaphthene	Air	kg	4.22E-11	5.70E-09	3.05E-09
78	Acenaphthylene	Air	kg	2.07E-11	2.79E-09	1.50E-09
79	Acetaldehyde	Air	kg	4.30E-05	9.60E-03	2.74E-03
80	Acetochlor	Air	kg	0.00E+00	0.00E+00	1.69E-08
81	Acetone	Air	kg	0.00E+00	1.06E-02	0.00E+00
82	Acetophenone	Air	kg	3.82E-12	9.50E-11	1.49E-09
83	Acrolein	Air	kg	5.21E-06	1.73E-03	1.35E-05
84	Alachlor	Air	kg	0.00E+00	0.00E+00	1.67E-09
85	Aldehydes, unspecified	Air	kg	1.31E-04	3.17E-04	2.45E-04
86	Ammonia	Air	kg	8.74E-05	2.86E-03	1.70E-04
87	Ammonium chloride	Air	kg	2.36E-07	2.88E-05	1.52E-05
88	Anthracene	Air	kg	1.74E-11	2.35E-09	1.26E-09
89	Antimony	Air	kg	1.49E-09	2.01E-07	1.14E-07
90	Arsenic	Air	kg	4.72E-08	4.69E-06	2.62E-06
91	Atrazine	Air	kg	0.00E+00	0.00E+00	3.30E-08
92	Barium	Air	kg	0.00E+00	0.00E+00	1.91E-07
93	Bentazone	Air	kg	0.00E+00	0.00E+00	1.35E-10
94	Benzene	Air	kg	5.25E-05	1.25E-02	7.13E-03
95	Benzene, chloro-	Air	kg	5.60E-12	1.39E-10	2.19E-09
96	Benzene, ethyl-	Air	kg	2.39E-11	7.05E-07	1.25E-07
97	Benzo(a)anthracene	Air	kg	6.63E-12	8.94E-10	4.78E-10
98	Benzo(a)pyrene	Air	kg	3.15E-12	4.25E-10	2.27E-10
99	Benzo(b,j,k)fluoranthene	Air	kg	9.11E-12	1.23E-09	6.58E-10
100	Benzo(g,h,i)perylene	Air	kg	2.24E-12	3.02E-10	1.61E-10
101	Benzo(ghi)perylene	Air	kg	0.00E+00	0.00E+00	6.92E-18
102	Benzyl chloride	Air	kg	1.78E-10	4.43E-09	6.96E-08
103	Beryllium	Air	kg	2.32E-09	2.50E-07	1.56E-07
104	Biphenyl	Air	kg	1.41E-10	1.90E-08	1.02E-08
105	Bromoform	Air	kg	9.92E-12	2.47E-10	3.88E-09
106	Bromoxynil	Air	kg	0.00E+00	0.00E+00	2.95E-10
107	BTEX (benzene, toluene, ethylbenzene, and xylene), unspecified ratio	Air	kg	5.98E-05	4.57E-03	7.29E-03
108	Butadiene	Air	kg	2.19E-06	1.65E-06	2.56E-08
109	Cadmium	Air	kg	1.15E-08	8.79E-07	7.48E-07
110	Carbofuran	Air	kg	0.00E+00	0.00E+00	2.52E-10
111	Carbon dioxide	Air	kg	2.81E-02	7.37E-02	2.00E+00
112	Carbon dioxide, biogenic	Air	kg	8.16E-03	3.95E+02	2.51E+00
113	Carbon dioxide, fossil	Air	kg	1.03E+01	1.07E+02	7.96E+01
114	Carbon disulfide	Air	kg	3.31E-11	8.24E-10	1.29E-08
115	Carbon monoxide	Air	kg	3.86E-06	9.73E-03	1.57E-02
116	Carbon monoxide, biogenic	Air	kg	0.00E+00	1.01E+00	3.29E-03

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
117	Carbon monoxide, fossil	Air	kg	9.46E-02	1.86E-01	1.22E-01
118	Chloride	Air	kg	6.25E-12	6.78E-10	3.62E-10
119	Chlorinated fluorocarbons and hydrochlorinated fluorocarbons, unspecified	Air	kg	0.00E+00	8.45E-09	5.99E-07
120	Chlorine	Air	kg	0.00E+00	1.01E-07	5.97E-06
121	Chloroform	Air	kg	1.50E-11	3.74E-10	5.87E-09
122	Chlorpyrifos	Air	kg	0.00E+00	0.00E+00	1.94E-09
123	Chromium	Air	kg	3.39E-08	3.31E-06	2.13E-06
124	Chromium VI	Air	kg	6.54E-09	8.83E-07	4.72E-07
125	Chrysene	Air	kg	8.28E-12	1.12E-09	5.98E-10
126	Cobalt	Air	kg	6.47E-08	1.35E-06	8.87E-07
127	Copper	Air	kg	5.81E-10	2.28E-08	5.02E-08
128	Cumene	Air	kg	1.35E-12	5.92E-04	1.04E-02
129	Cyanazine	Air	kg	0.00E+00	0.00E+00	2.91E-10
130	Cyanide	Air	kg	6.36E-10	1.58E-08	2.49E-07
131	Dicamba	Air	kg	0.00E+00	0.00E+00	1.72E-09
132	Dimethenamid	Air	kg	0.00E+00	0.00E+00	4.05E-09
133	Dimethyl ether	Air	kg	0.00E+00	4.28E-06	7.50E-05
134	Dinitrogen monoxide	Air	kg	1.75E-04	1.56E-03	9.88E-04
135	Dioxin, 2,3,7,8 tetrachlorodibenzo-p-	Air	kg	2.09E-13	9.55E-12	1.31E-09
136	Dioxins, measured as 2,3,7,8-tetrachlorodibenzo-p-dioxin	Air	kg	0.00E+00	0.00E+00	3.18E-19
137	Dipropylthiocarbamic acid S-ethyl ester	Air	kg	0.00E+00	0.00E+00	2.77E-09
138	Ethane, 1,1,1-trichloro-, HCFC-140	Air	kg	3.08E-10	8.34E-10	2.54E-09
139	Ethane, 1,2-dibromo-	Air	kg	3.05E-13	7.83E-12	1.19E-10
140	Ethane, 1,2-dichloro-	Air	kg	1.02E-11	2.53E-10	3.98E-09
141	Ethane, chloro-	Air	kg	1.07E-11	2.66E-10	4.18E-09
142	Ethene, tetrachloro-	Air	kg	4.27E-09	4.85E-07	2.65E-07
143	Ethene, trichloro-	Air	kg	0.00E+00	0.00E+00	2.25E-13
144	Ethylene oxide	Air	kg	0.00E+00	1.44E-08	4.43E-10
145	Fluoranthene	Air	kg	5.88E-11	7.93E-09	4.25E-09
146	Fluorene	Air	kg	7.54E-11	1.02E-08	5.44E-09
147	Fluoride	Air	kg	3.36E-07	9.37E-07	4.78E-06
148	Formaldehyde	Air	kg	6.67E-05	4.63E-03	4.17E-03
149	Furan	Air	kg	3.79E-13	5.49E-11	2.88E-11
150	Glyphosate	Air	kg	0.00E+00	0.00E+00	3.64E-09
151	HAPs	Air	kg	0.00E+00	1.13E-03	6.40E-06
152	HAPs, unspecified	Air	kg	0.00E+00	0.00E+00	1.02E-07
153	Heat, waste	Air	MJ	0.00E+00	1.27E+00	1.09E+01
154	Hexane	Air	kg	1.70E-11	4.24E-10	1.99E-04
155	Hydrazine, methyl-	Air	kg	4.33E-11	1.08E-09	1.69E-08
156	Hydrocarbons, unspecified	Air	kg	1.36E-06	1.67E-04	6.60E-03
157	Hydrogen	Air	kg	0.00E+00	3.08E-07	5.51E-06
158	Hydrogen chloride	Air	kg	1.06E-04	1.37E-02	7.21E-03
159	Hydrogen fluoride	Air	kg	1.24E-05	1.68E-03	8.93E-04
160	Hydrogen sulfide	Air	kg	2.02E-13	2.19E-11	1.17E-11
161	Indeno(1,2,3-cd)pyrene	Air	kg	5.05E-12	6.82E-10	3.65E-10
162	Iron	Air	kg	0.00E+00	0.00E+00	1.91E-07
163	Isophorone	Air	kg	1.48E-10	3.67E-09	5.77E-08
164	Isoprene	Air	kg	2.05E-04	2.22E-02	1.18E-02
165	Kerosene	Air	kg	1.13E-07	1.38E-05	7.27E-06
166	Lead	Air	kg	5.24E-08	3.63E-05	3.47E-06
167	Magnesium	Air	kg	9.11E-07	1.23E-04	6.58E-05
168	Manganese	Air	kg	7.02E-08	5.70E-06	4.87E-06
169	Mercaptans, unspecified	Air	kg	5.47E-08	1.36E-06	2.16E-05
170	Mercury	Air	kg	9.31E-09	1.36E-06	1.83E-06
171	Metals, unspecified	Air	kg	2.32E-14	2.51E-12	3.34E-05
172	Methane	Air	kg	1.42E-02	2.78E-01	3.32E-01
173	Methane, biogenic	Air	kg	0.00E+00	4.00E-03	2.27E-05
174	Methane, bromo-, Halon 1001	Air	kg	4.07E-11	1.01E-09	1.59E-08
175	Methane, chlorodifluoro-, HCFC-22	Air	kg	0.00E+00	1.20E-13	3.69E-15
176	Methane, chlorotrifluoro-, CFC-13	Air	kg	0.00E+00	1.14E-12	3.50E-14
177	Methane, dichloro-, HCC-30	Air	kg	7.21E-08	3.53E-06	2.43E-06

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
178	Methane, dichlorodifluoro-, CFC-12	Air	kg	3.75E-10	8.76E-10	6.81E-10
179	Methane, fossil	Air	kg	1.08E-03	2.81E-02	4.17E-02
180	Methane, monochloro-, R-40	Air	kg	1.35E-10	3.36E-09	5.27E-08
181	Methane, tetrachloro-, CFC-10	Air	kg	3.75E-11	8.92E-09	6.11E-07
182	Methanol	Air	kg	0.00E+00	1.26E-02	1.09E-01
183	Methyl ethyl ketone	Air	kg	9.92E-11	2.47E-09	3.88E-08
184	Methyl methacrylate	Air	kg	5.09E-12	1.27E-10	1.99E-09
185	Metolachlor	Air	kg	0.00E+00	0.00E+00	1.34E-08
186	Metribuzin	Air	kg	0.00E+00	0.00E+00	6.21E-11
187	N-nitrodimethylamine	Air	kg	0.00E+00	0.00E+00	5.02E-14
188	Naphthalene	Air	kg	1.34E-08	1.07E-05	5.87E-07
189	Nickel	Air	kg	8.18E-07	6.59E-06	6.06E-06
190	Nitrogen oxides	Air	kg	1.87E-01	7.51E-01	1.94E-01
191	Nitrogen, total	Air	kg	6.36E-06	0.00E+00	1.64E-09
192	NM VOC, nonmethane volatile organic compounds, unspecified origin	Air	kg	6.36E-03	1.81E-02	2.99E-02
193	Organic acids	Air	kg	8.66E-10	1.06E-07	5.58E-08
194	Organic substances, unspecified	Air	kg	5.14E-07	7.65E-04	5.32E-05
195	Other organic	Air	kg	0.00E+00	3.80E-05	2.16E-07
196	PAH, polycyclic aromatic hydrocarbons	Air	kg	9.42E-06	7.04E-06	2.25E-05
197	Paraquat	Air	kg	0.00E+00	0.00E+00	2.71E-10
198	Parathion, methyl	Air	kg	0.00E+00	0.00E+00	2.05E-10
199	Particulates	Air	kg	0.00E+00	2.09E-06	3.66E-05
200	Particulates, <10 um	Air	kg	0.00E+00	1.63E-01	9.02E-02
201	Particulates, <2.5 um	Air	kg	0.00E+00	8.60E-02	4.51E-02
202	Particulates, >10 um	Air	kg	0.00E+00	4.57E-04	1.39E-04
203	Particulates, >2.5 um, and <10 um	Air	kg	5.74E-03	1.07E-02	5.96E-03
204	Particulates, unspecified	Air	kg	1.04E-03	3.92E-02	1.29E-01
205	Pendimethalin	Air	kg	0.00E+00	0.00E+00	1.39E-09
206	Permethrin	Air	kg	0.00E+00	0.00E+00	1.25E-10
207	Phenanthrene	Air	kg	2.24E-10	3.02E-08	1.61E-08
208	Phenol	Air	kg	4.07E-12	2.61E-04	7.42E-05
209	Phenols, unspecified	Air	kg	3.76E-08	3.95E-07	4.91E-07
210	Phorate	Air	kg	0.00E+00	0.00E+00	6.42E-11
211	Phosphate	Air	kg	1.46E-07	0.00E+00	0.00E+00
212	Phthalate, dioctyl-	Air	kg	1.86E-11	4.62E-10	7.26E-09
213	Polycyclic organic matter, unspecified	Air	kg	0.00E+00	2.90E-12	8.90E-14
214	Potassium	Air	kg	0.00E+00	0.00E+00	3.38E-05
215	Propanal	Air	kg	9.67E-11	9.24E-06	3.43E-03
216	Propene	Air	kg	1.45E-04	3.26E-04	3.82E-03
217	Propylene oxide	Air	kg	0.00E+00	6.36E-07	1.05E-07
218	Pyrene	Air	kg	2.73E-11	3.69E-09	1.97E-09
219	Radioactive species, unspecified	Air	Bq	4.68E+03	6.32E+05	3.33E+05
220	Radionuclides (including radon)	Air	kg	6.31E-06	7.73E-04	4.07E-04
221	Selenium	Air	kg	1.16E-07	1.46E-05	7.94E-06
222	Simazine	Air	kg	0.00E+00	0.00E+00	8.79E-10
223	Sodium	Air	kg	0.00E+00	0.00E+00	7.81E-07
224	Styrene	Air	kg	6.36E-12	1.58E-10	2.49E-09
225	Sulfur	Air	kg	0.00E+00	0.00E+00	4.11E-06
226	Sulfur dioxide	Air	kg	6.82E-03	6.89E-01	7.09E-01
227	Sulfur monoxide	Air	kg	1.04E-02	2.65E-02	3.07E-03
228	Sulfur oxides	Air	kg	1.33E-04	1.10E-03	1.86E-02
229	Sulfur, total reduced	Air	kg	0.00E+00	0.00E+00	2.41E-06
230	Sulfuric acid, dimethyl ester	Air	kg	1.22E-11	3.04E-10	4.78E-09
231	t-butyl methyl ether	Air	kg	8.91E-12	2.22E-10	3.48E-09
232	Tar	Air	kg	7.03E-12	7.63E-10	4.07E-10
233	Terbufos	Air	kg	0.00E+00	0.00E+00	2.19E-09
234	TOC, total organic carbon	Air	kg	0.00E+00	0.00E+00	3.19E-06
235	Toluene	Air	kg	2.29E-05	2.00E-05	7.47E-07
236	Toluene, 2,4-dinitro-	Air	kg	7.12E-14	1.77E-12	2.79E-11
237	Vinyl acetate	Air	kg	1.93E-12	4.81E-11	7.56E-10
238	VOC	Air	kg	5.02E-03	2.21E-01	4.38E-01
239	Wood (dust)	Air	kg	0.00E+00	1.18E-01	6.55E-04

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
240	Xylene	Air	kg	1.60E-05	1.34E-05	4.11E-07
241	Zinc	Air	kg	1.18E-07	1.52E-08	2.24E-07
242	2-hexanone	Water	kg	8.00E-08	5.58E-07	7.48E-07
243	2-methyl-4-chlorophenoxyacetic acid	Water	kg	0.00E+00	0.00E+00	9.77E-13
244	2-propanol	Water	kg	0.00E+00	0.00E+00	2.27E-09
245	2,4-D	Water	kg	0.00E+00	0.00E+00	5.24E-11
246	4-methyl-2-pentanone	Water	kg	5.15E-08	3.59E-07	4.81E-07
247	Acetaldehyde	Water	kg	0.00E+00	1.52E-08	4.67E-10
248	Acetochlor	Water	kg	0.00E+00	0.00E+00	7.26E-10
249	Acetone	Water	kg	1.22E-07	8.55E-07	1.15E-06
250	Acidity, unspecified	Water	kg	0.00E+00	0.00E+00	8.12E-15
251	Acids, unspecified	Water	kg	1.31E-10	1.42E-08	3.23E-06
252	Alachlor	Water	kg	0.00E+00	0.00E+00	7.15E-11
253	Aluminium	Water	kg	1.05E-03	3.71E-03	3.73E-03
254	Aluminum	Water	kg	0.00E+00	0.00E+00	9.16E-06
255	Ammonia	Water	kg	2.28E-04	1.29E-03	1.57E-03
256	Ammonia, as N	Water	kg	6.60E-11	7.15E-09	3.81E-09
257	Ammonium, ion	Water	kg	5.04E-08	2.12E-04	5.30E-06
258	Antimony	Water	kg	6.52E-07	2.16E-06	2.22E-06
259	Arsenic	Water	kg	3.62E-06	2.06E-05	2.66E-05
260	Arsenic, ion	Water	kg	0.00E+00	0.00E+00	1.12E-11
261	Atrazine	Water	kg	0.00E+00	0.00E+00	1.42E-09
262	Barium	Water	kg	1.43E-02	4.96E-02	5.23E-02
263	Bentazone	Water	kg	0.00E+00	0.00E+00	5.77E-12
264	Benzene	Water	kg	2.05E-05	1.11E-03	1.72E-02
265	Benzene, 1-methyl-4-(1-methylethyl)-	Water	kg	1.22E-09	8.55E-09	1.14E-08
266	Benzene, ethyl-	Water	kg	1.16E-06	8.07E-06	1.08E-05
267	Benzene, pentamethyl-	Water	kg	9.18E-10	6.41E-09	8.59E-09
268	Benzenes, alkylated, unspecified	Water	kg	5.72E-07	1.90E-06	1.95E-06
269	Benzo(a)pyrene	Water	kg	0.00E+00	0.00E+00	2.36E-10
270	Benzoic acid	Water	kg	1.24E-05	8.68E-05	1.16E-04
271	Beryllium	Water	kg	1.86E-07	1.00E-06	1.26E-06
272	Biphenyl	Water	kg	3.70E-08	1.23E-07	1.26E-07
273	BOD5, biological oxygen demand	Water	kg	2.24E-03	2.46E-02	1.81E-01
274	Boron	Water	kg	3.84E-05	2.68E-04	3.60E-04
275	Bromide	Water	kg	2.62E-03	1.83E-02	2.46E-02
276	Bromoxynil	Water	kg	0.00E+00	0.00E+00	7.64E-12
277	Cadmium	Water	kg	5.85E-07	3.08E-06	9.52E-06
278	Cadmium, ion	Water	kg	0.00E+00	0.00E+00	2.72E-11
279	Calcium	Water	kg	3.93E-02	2.75E-01	3.68E-01
280	Calcium, ion	Water	kg	0.00E+00	0.00E+00	1.32E-07
281	Carbofuran	Water	kg	0.00E+00	0.00E+00	1.08E-11
282	CFCs, unspecified	Water	kg	0.00E+00	0.00E+00	2.27E-09
283	Chloride	Water	kg	4.42E-01	3.09E+00	4.14E+00
284	Chlorpyrifos	Water	kg	0.00E+00	0.00E+00	8.33E-11
285	Chromate	Water	kg	0.00E+00	0.00E+00	4.59E-13
286	Chromium	Water	kg	2.79E-05	6.77E-05	8.20E-05
287	Chromium III	Water	kg	2.14E-06	3.04E-05	1.86E-05
288	Chromium VI	Water	kg	1.16E-07	2.70E-07	2.10E-07
289	Chromium, ion	Water	kg	0.00E+00	0.00E+00	7.02E-12
290	Cobalt	Water	kg	2.71E-07	1.89E-06	2.54E-06
291	COD, chemical oxygen demand	Water	kg	4.24E-03	3.55E-02	1.99E-01
292	Copper	Water	kg	3.65E-06	2.17E-05	2.23E-05
293	Copper, ion	Water	kg	0.00E+00	0.00E+00	1.17E-11
294	Cumene	Water	kg	0.00E+00	1.42E-03	2.49E-02
295	Cyanazine	Water	kg	0.00E+00	0.00E+00	1.25E-11
296	Cyanide	Water	kg	8.84E-10	6.22E-09	3.52E-08
297	Decane	Water	kg	3.57E-07	2.49E-06	3.34E-06
298	Detergent, oil	Water	kg	1.03E-05	8.09E-05	1.11E-04
299	Dibenzofuran	Water	kg	2.33E-09	1.63E-08	2.18E-08
300	Dibenzothiophene	Water	kg	2.00E-09	1.36E-08	1.80E-08
301	Dicamba	Water	kg	0.00E+00	0.00E+00	7.35E-11
302	Dimethenamid	Water	kg	0.00E+00	0.00E+00	1.74E-10

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
303	Dipropylthiocarbamic acid S-ethyl ester	Water	kg	0.00E+00	0.00E+00	7.18E-11
304	Disulfoton	Water	kg	0.00E+00	0.00E+00	4.28E-12
305	Diuron	Water	kg	0.00E+00	0.00E+00	1.20E-12
306	DOC, dissolved organic carbon	Water	kg	4.03E-13	2.62E-03	4.59E-02
307	Docosane	Water	kg	1.31E-08	9.15E-08	1.23E-07
308	Dodecane	Water	kg	6.77E-07	4.73E-06	6.34E-06
309	Eicosane	Water	kg	1.87E-07	1.30E-06	1.74E-06
310	Fluorene	Water	kg	0.00E+00	2.84E-13	8.72E-15
311	Fluorene, 1-methyl-	Water	kg	1.39E-09	9.73E-09	1.30E-08
312	Fluorenes, alkylated, unspecified	Water	kg	3.31E-08	1.10E-07	1.13E-07
313	Fluoride	Water	kg	8.13E-04	1.00E-04	5.28E-05
314	Fluorine	Water	kg	1.64E-08	5.81E-08	6.20E-08
315	Furan	Water	kg	0.00E+00	0.00E+00	8.33E-11
316	Glyphosate	Water	kg	0.00E+00	0.00E+00	1.56E-10
317	Hexadecane	Water	kg	7.39E-07	5.16E-06	6.92E-06
318	Hexanoic acid	Water	kg	2.57E-06	1.80E-05	2.41E-05
319	Hydrocarbons, unspecified	Water	kg	5.05E-13	5.47E-11	8.13E-05
320	Iron	Water	kg	2.09E-03	8.72E-03	9.46E-03
321	Lead	Water	kg	7.14E-06	3.52E-05	4.25E-05
322	Lead-210/kg	Water	kg	1.27E-15	8.89E-15	1.19E-14
323	Lithium	Water	kg	8.38E-04	6.31E-02	1.01E-01
324	Lithium, ion	Water	kg	0.00E+00	0.00E+00	2.10E-09
325	m-xylene	Water	kg	3.71E-07	2.59E-06	3.47E-06
326	Magnesium	Water	kg	7.69E-03	5.37E-02	7.20E-02
327	Manganese	Water	kg	1.37E-05	2.83E-04	2.20E-04
328	Mercury	Water	kg	1.56E-08	4.59E-08	7.05E-06
329	Metallic ions, unspecified	Water	kg	6.16E-12	6.68E-10	2.52E-04
330	Methane, monochloro-, R-40	Water	kg	4.93E-10	3.44E-09	4.61E-09
331	Methyl ethyl ketone	Water	kg	9.86E-10	6.89E-09	9.22E-09
332	Metolachlor	Water	kg	0.00E+00	0.00E+00	5.74E-10
333	Metribuzin	Water	kg	0.00E+00	0.00E+00	2.66E-12
334	Molybdenum	Water	kg	2.82E-07	1.97E-06	2.63E-06
335	n-hexacosane	Water	kg	8.18E-09	5.71E-08	7.65E-08
336	Naphthalene	Water	kg	2.23E-07	1.55E-06	2.08E-06
337	Naphthalene, 2-methyl-	Water	kg	1.94E-07	1.35E-06	1.81E-06
338	Naphthalenes, alkylated, unspecified	Water	kg	9.37E-09	3.11E-08	3.19E-08
339	Nickel	Water	kg	3.43E-06	1.76E-05	2.21E-05
340	Nickel, ion	Water	kg	0.00E+00	0.00E+00	2.63E-13
341	Nitrate	Water	kg	4.42E-14	4.79E-12	2.70E-07
342	Nitrate compounds	Water	kg	1.78E-12	1.93E-10	1.03E-10
343	Nitric acid	Water	kg	3.99E-09	4.33E-07	2.31E-07
344	Nitrogen, total	Water	kg	1.25E-07	1.54E-05	3.01E-05
345	o-cresol	Water	kg	3.52E-07	2.46E-06	3.30E-06
346	o-xylene	Water	kg	0.00E+00	6.03E-13	1.85E-14
347	Octadecane	Water	kg	1.83E-07	1.28E-06	1.71E-06
348	Oils, unspecified	Water	kg	2.82E-04	1.83E-03	2.38E-03
349	Organic substances, unspecified	Water	kg	0.00E+00	0.00E+00	2.22E-09
350	p-cresol	Water	kg	3.80E-07	2.65E-06	3.56E-06
351	p-xylene	Water	kg	0.00E+00	6.03E-13	1.85E-14
352	Paraquat	Water	kg	0.00E+00	0.00E+00	1.16E-11
353	Parathion, methyl	Water	kg	0.00E+00	0.00E+00	8.77E-12
354	Pendimethalin	Water	kg	0.00E+00	0.00E+00	5.97E-11
355	Permethrin	Water	kg	0.00E+00	0.00E+00	5.36E-12
356	Phenanthrene	Water	kg	3.37E-09	1.52E-08	1.80E-08
357	Phenanthrenes, alkylated, unspecified	Water	kg	3.89E-09	1.29E-08	1.32E-08
358	Phenol	Water	kg	5.11E-06	1.19E-05	9.61E-06
359	Phenol, 2,4-dimethyl-	Water	kg	3.43E-07	2.40E-06	3.21E-06
360	Phenols, unspecified	Water	kg	1.06E-06	2.80E-05	4.36E-05
361	Phorate	Water	kg	0.00E+00	0.00E+00	1.66E-12
362	Phosphate	Water	kg	6.11E-04	0.00E+00	2.17E-05
363	Phosphorus	Water	kg	0.00E+00	0.00E+00	4.65E-06
364	Phosphorus compounds, unspecified	Water	kg	0.00E+00	0.00E+00	3.08E-08
365	Phosphorus, total	Water	kg	0.00E+00	0.00E+00	2.75E-06

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
366	Process solvents, unspecified	Water	kg	0.00E+00	0.00E+00	8.33E-09
367	Propene	Water	kg	0.00E+00	5.24E-04	9.18E-03
368	Radioactive species, nuclides, unspecified	Water	Bq	7.32E+00	8.96E+02	4.72E+02
369	Radium-226/kg	Water	kg	4.43E-13	3.09E-12	4.14E-12
370	Radium-228/kg	Water	kg	2.26E-15	1.58E-14	2.12E-14
371	Selenium	Water	kg	1.44E-07	2.58E-06	1.57E-06
372	Silver	Water	kg	2.57E-05	1.79E-04	2.40E-04
373	Simazine	Water	kg	0.00E+00	0.00E+00	3.77E-11
374	Sodium	Water	kg	1.25E-01	8.71E-01	1.17E+00
375	Sodium, ion	Water	kg	0.00E+00	0.00E+00	4.17E-07
376	Solids, inorganic	Water	kg	1.02E-11	1.10E-09	5.87E-10
377	Solved solids	Water	kg	0.00E+00	1.42E-05	2.98E-04
378	Strontium	Water	kg	6.68E-04	4.66E-03	6.25E-03
379	Styrene	Water	kg	0.00E+00	1.78E-11	3.21E-10
380	Sulfate	Water	kg	9.93E-04	1.88E-02	1.50E-02
381	Sulfide	Water	kg	5.93E-07	1.59E-06	3.10E-05
382	Sulfur	Water	kg	3.25E-05	2.27E-04	3.04E-04
383	Sulfuric acid	Water	kg	0.00E+00	0.00E+00	1.95E-10
384	Surfactants	Water	kg	0.00E+00	2.79E-11	8.59E-13
385	Suspended solids, unspecified	Water	kg	5.78E-01	3.93E+00	5.38E+00
386	Tar	Water	kg	1.01E-13	1.09E-11	5.82E-12
387	Terbufos	Water	kg	0.00E+00	0.00E+00	5.66E-11
388	Tetradecane	Water	kg	2.97E-07	2.07E-06	2.78E-06
389	Thallium	Water	kg	1.37E-07	4.56E-07	4.69E-07
390	Tin	Water	kg	2.67E-06	1.25E-05	1.50E-05
391	Titanium	Water	kg	1.00E-05	3.32E-05	3.41E-05
392	Titanium, ion	Water	kg	0.00E+00	0.00E+00	3.39E-11
393	TOC, total organic carbon	Water	kg	0.00E+00	2.62E-03	4.59E-02
394	Toluene	Water	kg	1.94E-05	1.36E-04	1.82E-04
395	Vanadium	Water	kg	3.33E-07	2.32E-06	3.11E-06
396	Wastewater/m ³	Water	m ³	0.00E+00	0.00E+00	6.87E-04
397	Xylene	Water	kg	1.04E-05	7.11E-05	9.48E-05
398	Yttrium	Water	kg	8.25E-08	5.76E-07	7.72E-07
399	Zinc	Water	kg	2.42E-05	9.40E-05	9.44E-05
400	Zinc, ion	Water	kg	0.00E+00	0.00E+00	3.67E-07
401	Waste in inert landfill	Waste	kg	0.00E+00	0.00E+00	7.72E-01
402	Waste to recycling	Waste	kg	0.00E+00	0.00E+00	3.53E-01
403	Waste, solid	Waste	kg	0.00E+00	0.00E+00	9.81E-03

17 APPENDIX C: PACIFIC NORTHWEST LVL LIFE-CYCLE IMPACT ASSESSMENT — ECONOMIC ALLOCATION

Cradle-to-gate LCI and impact assessment results of economic allocation are shown in this section. The results for NW LVL analyses were for three life-cycle stages: (1) forestry operations, (2) veneer production, and (3) LVL production. The difference between the raw material energy consumption obtained for the two different allocation methods, i.e. mass and economic, was about 1% to 7%. Similarly, no notable difference was observed in the overall cumulative energy consumption, which was about 3%. Although the impact assessment results did not differ much when economic allocation was used (about 1% to 2% difference), ozone depletion impact category of the veneer production stage was four times lower compared with mass allocation results. This resulted in a 10% increase in overall ozone depletion impact. In addition, using economic allocation led to a slight decrease in contribution of veneer production to the overall energy consumption, whereas the share from LVL production increased from 23% to 26%. The difference in CPEC of veneer production between the mass and economic allocations was about 7%. The impact assessment results for the categories taken into consideration were similar, with a difference of about 6% to 8% for both allocation methods. The majority of the ozone depletion impact at the veneer production stage is assigned to the wood boiler used in veneer drying. The fuel used in the wood boiler is a mixture of coproducts coming from a downstream process of plywood production. The lower ozone depletion for economic allocation is a result of lower emissions allocated to coproducts because of their low economic value.

Table 26. Raw material primary energy consumption per one cubic meter of cradle-to-gate LVL, PNW, economic allocation.

Fuel	Unit	Total	Forestry operations	Dry veneer production	LVL production
Wood fuel	OD kg	2.10E+02	0.00E+00	2.09E+02	1.33E+00
Gas, natural, in ground	kg	3.62E+01	1.71E-01	1.19E+01	2.41E+01
Coal, in ground	kg	4.05E+01	1.89E-01	2.41E+01	1.63E+01
Uranium oxide, in ore	kg	8.30E-04	4.44E-06	5.06E-04	3.20E-04
Oil, crude, in ground	kg	1.76E+01	3.23E+00	7.09E+00	7.28E+00

Table 27. Cumulative primary energy consumption per one cubic meter of cradle-to-gate LVL, PNW, economic allocation.

Fuel	Percentage	Total	Forestry operations	Veneer production	LVL production
MJ/m ³					
Wood fuel	50.3	4.39E+03	0.00E+00	4.37E+03	2.77E+01
Gas, natural, in ground	22.5	1.97E+03	9.31E+00	6.47E+02	1.31E+03
Coal, in ground	12.1	1.06E+03	4.95E+00	6.31E+02	4.26E+02
Oil, crude, in ground	9.2	8.00E+02	1.47E+02	3.22E+02	3.31E+02
Uranium oxide, in ore	3.6	3.16E+02	1.69E+00	1.93E+02	1.22E+02
Hydro	1.9	1.64E+02	3.65E-03	1.02E+02	6.27E+01
Wind	0.2	1.86E+01	0.00E+00	1.15E+01	7.03E+00
Solar	0.0	8.94E-01	0.00E+00	5.56E-01	3.39E-01
Geothermal	0.2	1.42E+01	0.00E+00	8.83E+00	5.38E+00
Total	100.0	8.74E+03	1.63E+02	6.28E+03	2.29E+03
Total, %		100	1.9	71.9	26.3

Table 28. Air emissions released per one cubic meter of LVL, cradle-to-gate, PNW, economic allocation.^a

Air emissions	Total	Forestry operations	Veneer production	LVL production
	kg/m ³			
Acetone	9.82E-03	0.00E+00	9.82E-03	0.00E+00
Acrolein	1.57E-03	5.21E-06	1.55E-03	1.50E-05
Aldehydes, unspecified	7.04E-04	1.31E-04	2.98E-04	2.75E-04
Ammonia	2.95E-03	8.74E-05	2.67E-03	1.90E-04
Benzene	1.94E-02	5.25E-05	1.14E-02	7.96E-03
BTEX ^b	1.24E-02	5.98E-05	4.16E-03	8.15E-03
Carbon dioxide	2.33E+00	2.81E-02	6.31E-02	2.23E+00
Carbon dioxide, biogenic	3.72E+02	8.16E-03	3.69E+02	2.79E+00
Carbon dioxide, fossil	2.00E+02	1.03E+01	1.01E+02	8.90E+01
Carbon monoxide	2.66E-02	3.86E-06	9.06E-03	1.75E-02
Carbon monoxide, biogenic	9.46E-01	0.00E+00	9.42E-01	3.65E-03
Carbon monoxide, fossil	4.08E-01	9.46E-02	1.77E-01	1.36E-01
Cumene	1.16E-02	1.35E-12	2.34E-05	1.16E-02
Dinitrogen monoxide	2.74E-03	1.75E-04	1.46E-03	1.10E-03
Formaldehyde	8.87E-03	6.67E-05	4.14E-03	4.66E-03
HAPs	1.06E-03	0.00E+00	1.05E-03	7.09E-06
Heat, waste	1.28E+01	0.00E+00	6.31E-01	1.21E+01
Hexane	2.23E-04	1.70E-11	3.38E-10	2.23E-04
Hydrocarbons, unspecified	7.53E-03	1.36E-06	1.55E-04	7.37E-03
Hydrogen chloride	2.09E-02	1.06E-04	1.27E-02	8.06E-03
Hydrogen fluoride	2.57E-03	1.24E-05	1.56E-03	9.98E-04
Isoprene	3.42E-02	2.05E-04	2.07E-02	1.33E-02
Magnesium	1.89E-04	9.11E-07	1.14E-04	7.36E-05
Methane	6.41E-01	1.42E-02	2.56E-01	3.71E-01
Methane, biogenic	3.75E-03	0.00E+00	3.73E-03	2.52E-05
Methane, fossil	7.34E-02	1.08E-03	2.57E-02	4.66E-02
Methanol	1.32E-01	0.00E+00	9.99E-03	1.22E-01
Nitrogen oxides	1.12E+00	1.87E-01	7.11E-01	2.17E-01
NMVO ^c	5.59E-02	6.36E-03	1.61E-02	3.35E-02
Organic substances, unspecified	7.72E-04	5.14E-07	7.12E-04	5.94E-05
Particulates, <10 µm	2.47E-01	0.00E+00	1.47E-01	1.01E-01
Particulates, <2.5 µm	1.27E-01	0.00E+00	7.63E-02	5.04E-02
Particulates, >10 µm	6.21E-04	0.00E+00	4.26E-04	1.94E-04
Particulates, >2.5 µm, and < 10 µm	2.26E-02	5.74E-03	1.02E-02	6.67E-03
Particulates, unspecified	1.82E-01	1.04E-03	3.65E-02	1.45E-01
Phenol	3.03E-04	4.07E-12	2.20E-04	8.29E-05
Propanal	3.84E-03	9.67E-11	8.61E-06	3.83E-03
Propene	4.53E-03	1.45E-04	1.15E-04	4.27E-03
Radioactive species, unspecified	9.65E+05	4.68E+03	5.88E+05	3.72E+05
Radionuclides (including radon)	1.18E-03	6.31E-06	7.19E-04	4.55E-04
Sulfur dioxide	1.43E+00	6.82E-03	6.35E-01	7.93E-01
Sulfur monoxide	3.94E-02	1.04E-02	2.55E-02	3.44E-03
Sulfur oxides	2.13E-02	1.33E-04	3.64E-04	2.08E-02

^a Because of a large amount of air emissions, emissions greater than 10^{-4} and HAPs generated from LVL production are shown. A complete list of all air emissions can be found in Appendix E.

^b BTEX (benzene, toluene, ethylbenzene, and xylene), unspecified ratio.

^c Nonmethane volatile organic compounds, unspecified origin.

Table 29. Emissions to water released per cubic meter of LVL, cradle-to-gate, PNW, economic allocation.^a

Water emissions	Total	Forestry operations	Dry veneer production	LVL production
	kg/m ³			
Aluminium	8.68E-03	1.05E-03	3.45E-03	4.18E-03
Ammonia	3.17E-03	2.28E-04	1.19E-03	1.75E-03
Ammonium, ion	2.03E-04	5.04E-08	1.98E-04	5.68E-06
Barium	1.19E-01	1.43E-02	4.61E-02	5.85E-02
Benzene	1.94E-02	2.05E-05	1.70E-04	1.92E-02
Benzoic acid	2.22E-04	1.24E-05	7.98E-05	1.30E-04
BOD5, biological oxygen demand	2.19E-01	2.24E-03	1.47E-02	2.02E-01
Boron	6.87E-04	3.84E-05	2.47E-04	4.02E-04
Bromide	4.69E-02	2.62E-03	1.69E-02	2.75E-02
Calcium	7.04E-01	3.93E-02	2.53E-01	4.12E-01
Chloride	7.91E+00	4.42E-01	2.84E+00	4.63E+00
Chromium	1.83E-04	2.79E-05	6.30E-05	9.18E-05
COD, chemical oxygen demand	2.52E-01	4.24E-03	2.47E-02	2.23E-01
Cumene	2.79E-02	0.00E+00	5.62E-05	2.78E-02
Detergent, oil	2.08E-04	1.03E-05	7.43E-05	1.24E-04
DOC, dissolved organic carbon	5.14E-02	4.03E-13	1.04E-04	5.13E-02
Fluoride	9.65E-04	8.13E-04	9.34E-05	5.91E-05
Iron	2.08E-02	2.09E-03	8.09E-03	1.06E-02
Lithium	1.71E-01	8.38E-04	5.74E-02	1.12E-01
Magnesium	1.38E-01	7.69E-03	4.94E-02	8.05E-02
Manganese	5.23E-04	1.37E-05	2.62E-04	2.46E-04
Metallic ions, unspecified	2.82E-04	6.16E-12	6.23E-10	2.82E-04
Oils, unspecified	4.63E-03	2.82E-04	1.69E-03	2.66E-03
Phosphate	6.35E-04	6.11E-04	0.00E+00	2.43E-05
Propene	1.03E-02	0.00E+00	2.07E-05	1.03E-02
Radioactive species, nuclides, unspecified	1.37E+03	7.32E+00	8.34E+02	5.27E+02
Silver	4.59E-04	2.57E-05	1.65E-04	2.69E-04
Sodium	2.23E+00	1.25E-01	8.01E-01	1.31E+00
Solved solids	3.33E-04	0.00E+00	5.60E-07	3.33E-04
Strontium	1.19E-02	6.68E-04	4.29E-03	6.98E-03
Sulfate	3.52E-02	9.93E-04	1.74E-02	1.68E-02
Sulfur	5.80E-04	3.25E-05	2.08E-04	3.39E-04
Suspended solids, unspecified	1.02E+01	5.78E-01	3.61E+00	6.02E+00
TOC, total organic carbon	5.14E-02	0.00E+00	1.04E-04	5.13E-02
Toluene	3.47E-04	1.94E-05	1.25E-04	2.03E-04
Wastewater/m ³	7.67E-04	0.00E+00	0.00E+00	7.67E-04
Xylene	1.82E-04	1.04E-05	6.54E-05	1.06E-04
Zinc	2.17E-04	2.42E-05	8.74E-05	1.06E-04

^a Because of large amount of air emissions, emissions greater than 10⁻⁴ and HAPs generated from LVL production are shown. A complete list of all air emissions can be found in Appendix E.

Table 30. Waste to treatment per one cubic meter of LVL, cradle-to-gate, PNW, economic allocation.

Waste to treatment	Total	Forestry operations	Veneer production	LVL production
	kg/m ³			
Waste in inert landfill	8.88E+00	0.00E+00	8.02E+00	8.63E-01
Waste to recycling	3.95E-01	0.00E+00	0.00E+00	3.95E-01

Table 31. Environmental performance of one cubic meter LVL, cradle-to-gate, PNW, economic allocation.

Impact category	Unit	Total	Forestry operations	Veneer production	LVL production
Global warming	kg CO ₂ e	2.21E+02	1.08E+01	1.08E+02	1.02E+02
Acidification	kg SO ₂ e	2.30E+00	1.49E-01	1.18E+00	9.78E-01
Eutrophication	kg Ne	7.75E-02	1.03E-02	3.48E-02	3.24E-02
Ozone depletion	kg CFC-11e	5.23E-07	4.87E-10	2.18E-09	5.21E-07
Smog	kg O ₃ e	3.09E+01	4.67E+00	1.87E+01	7.55E+00
Total primary energy consumption	MJ	8.74E+03	1.63E+02	6.28E+03	2.29E+03
Nonrenewable fossil	MJ	3.83E+03	1.61E+02	1.60E+03	2.07E+03
Nonrenewable nuclear	MJ	3.16E+02	1.69E+00	1.93E+02	1.22E+02
Renewable (solar, wind, hydroelectric, and geothermal)	MJ	1.98E+02	3.65E-03	1.23E+02	7.55E+01
Renewable, biomass	MJ	4.39E+03	0.00E+00	4.37E+03	2.77E+01
Material resources consumption (nonfuel resources)	Unit	Total	Forestry operations	Veneer production	LVL production
Nonrenewable materials	kg	4.76E+00	0.00E+00	4.76E+00	6.49E-05
Renewable materials	kg	8.62E+02	0.00E+00	8.57E+02	4.87E+00
Fresh water	L	1.19E+03	1.03E+01	8.04E+02	3.76E+02
Waste generated	Unit	Total	Forestry operations	Veneer production	LVL production
Solid waste	kg	9.28E+00	0.00E+00	8.02E+00	1.26E+00

18 APPENDIX D: SUBSTANCE CONTRIBUTION ANALYSIS

Table 32. Substance contribution analysis to acidification (kg SO₂e) by life-cycle stage (total percentage basis and values).

Substances	Compartment type	Mass allocation				Economic allocation			
		Total (%)	Forestry operations	Veneer production	LVL production	Total (%)	Forestry operations	Veneer production	LVL production
Total of all compartments		100.00	1.49E-01	1.26E+00	8.75E-01	100.00	1.49E-01	1.18E+00	9.78E-01
Sulfur dioxide	Air	61.46	6.82E-03	6.89E-01	7.09E-01	62.27	6.82E-03	6.35E-01	7.93E-01
Nitrogen oxides	Air	34.68	1.31E-01	5.26E-01	1.36E-01	33.88	1.31E-01	4.97E-01	1.52E-01
Sulfur monoxide	Air	1.75	1.04E-02	2.65E-02	3.07E-03	1.71	1.04E-02	2.55E-02	3.44E-03
Other substances	Air	<1	4.11E-04	2.12E-02	2.67E-02	<1	4.11E-04	1.91E-02	2.98E-02

Table 33. Substance contribution analysis to eutrophication (kg Ne) by life-cycle stage (total percentage basis and values).

Substances	Compartment type	Mass Allocation				Economic Allocation			
		TOTAL	Forestry Operations	Veneer Production	LVL production	TOTAL	Forestry Operations	Veneer Production	LVL production
Total of all compartments		100.00%	1.03E-02	3.78E-02	2.89E-02	100.00%	1.03E-02	3.48E-02	3.24E-02
Nitrogen oxides	Air	65.14%	8.30E-03	3.33E-02	8.59E-03	63.74%	8.30E-03	3.15E-02	9.62E-03
COD, Chemical Oxygen Demand	Water	15.53%	2.12E-04	1.78E-03	9.97E-03	16.24%	2.12E-04	1.24E-03	1.11E-02
BOD5, Biological Oxygen Demand	Water	13.51%	1.12E-04	1.23E-03	9.06E-03	14.16%	1.78E-04	9.28E-04	1.36E-03
Ammonia	Water	3.12%	1.78E-04	1.01E-03	1.22E-03	3.19%	1.03E-02	3.48E-02	3.24E-02
Phosphate	Water	1.96%	1.45E-03	0.00E+00	5.17E-05	1.95%	1.45E-03	0.00E+00	5.77E-05
Other substances	Air	<1%	1.05E-05	5.05E-04	6.70E-05	<1%	9.35E-08	1.54E-04	5.22E-05

Table 34. Substance contribution analysis to smog potential (kg O₃e) by life-cycle stage (total percentage basis and values).

Substances	Compartment type	Mass allocation				Economic allocation			
		Total (%)	Forestry operations	Veneer production	LVL production	Total (%)	Forestry operations	Veneer production	LVL production
Total of all compartments		100.00	4.67E+00	1.98E+01	6.74E+00	100.00	4.67E+00	1.87E+01	7.55E+00
Nitrogen oxides	Air	89.93	4.65E+00	1.86E+01	4.81E+00	89.44	4.65E+00	1.76E+01	5.38E+00
VOC, volatile organic compounds	Air	7.65	1.81E-02	7.94E-01	1.58E+00	8.09	1.81E-02	7.23E-01	1.76E+00
Isoprene	Air	1.16	2.20E-03	2.36E-01	1.26E-01	1.17	2.20E-03	2.20E-01	1.41E-01
Other substances	Air	<1	3.12E-03	1.52E-01	2.37E-01	<1	3.12E-03	1.33E-01	2.65E-01

19 APPENDIX E: PACIFIC NORTHWEST LVL LIFE-CYCLE INVENTORY FLOWS — ECONOMIC ALLOCATION

Table 35. Economic allocation inventory.

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
1	Calcite	Raw	kg	0.00E+00	0.00E+00	1.22E-03
2	Carbon dioxide, in air	Raw	kg	1.13E+03	7.63E+01	8.86E-01
3	Carbon, organic, in soil or biomass stock	Raw	kg	0.00E+00	0.00E+00	1.12E+03
4	Coal, 26.4 MJ per kg	Raw	kg	1.89E-01	2.41E+01	1.63E+01
5	Coal, 26.4 MJ per kg, in ground	Raw	kg	0.00E+00	0.00E+00	8.12E-05
6	Coal, bituminous, 24.8 MJ per kg	Raw	kg	0.00E+00	2.55E-05	1.13E-06
7	Coal, brown	Raw	kg	0.00E+00	2.29E-06	1.02E-07
8	Copper ore	Raw	kg	0.00E+00	0.00E+00	2.46E-03
9	Energy, from biomass	Raw	MJ	0.00E+00	4.23E-06	1.88E-07
10	Energy, from hydro power	Raw	MJ	3.65E-03	1.02E+02	6.27E+01
11	Energy, geothermal	Raw	MJ	0.00E+00	8.83E+00	5.38E+00
12	Energy, kinetic (in wind), converted	Raw	MJ	0.00E+00	1.15E+01	7.03E+00
13	Energy, recovered	Raw	MJ	0.00E+00	3.24E-06	1.44E-07
14	Energy, solar, converted	Raw	MJ	0.00E+00	5.56E-01	3.39E-01
15	Fuel	Raw	m ³	3.36E-03	0.00E+00	0.00E+00
16	Gas, natural, 36.6 MJ per m ³	Raw	m ³	0.00E+00	9.72E-05	4.32E-06
17	Gas, natural, 46.8 MJ per kg	Raw	kg	0.00E+00	1.30E-01	9.13E-06
18	Gas, natural, 46.8 MJ per kg, in ground	Raw	kg	0.00E+00	0.00E+00	1.73E-04
19	Gas, natural, in ground	Raw	m ³	0.00E+00	0.00E+00	6.13E-04
20	Gas, natural/m ³	Raw	m ³	2.43E-01	1.69E+01	3.43E+01
21	Iron ore	Raw	kg	0.00E+00	0.00E+00	4.13E-04
22	Limestone	Raw	kg	0.00E+00	4.76E+00	6.49E-05
23	Limestone, in ground	Raw	kg	0.00E+00	0.00E+00	2.99E-02
24	Nitrogen	Raw	kg	0.00E+00	0.00E+00	1.31E-02
25	Nitrogen, in air	Raw	kg	5.29E-02	0.00E+00	0.00E+00
26	Occupation, arable, conservation tillage	Raw	m ^{2a}	0.00E+00	0.00E+00	3.86E-04
27	Occupation, arable, conventional tillage	Raw	m ^{2a}	0.00E+00	0.00E+00	4.23E-04
28	Occupation, arable, reduced tillage	Raw	m ^{2a}	0.00E+00	0.00E+00	2.59E-04
29	Oil, crude	Raw	kg	3.23E+00	7.09E+00	7.28E+00
30	Oil, crude, 42 MJ per kg	Raw	kg	0.00E+00	5.85E-01	4.41E-06
31	Oil, crude, 42 MJ per kg, in ground	Raw	kg	0.00E+00	0.00E+00	6.97E-04
32	Oil, crude, 42.7 MJ per kg	Raw	kg	0.00E+00	5.08E-05	2.26E-06
33	Oil, crude, in ground	Raw	kg	0.00E+00	0.00E+00	2.77E-03
34	Oxygen	Raw	kg	0.00E+00	1.25E-04	1.16E-05
35	Oxygen, in air	Raw	kg	0.00E+00	3.12E-03	1.55E+00
36	Pesticides	Raw	kg	0.00E+00	0.00E+00	2.55E-07
37	Phosphate ore, in ground	Raw	kg	0.00E+00	0.00E+00	2.43E-05
38	Phosphorus, in ground	Raw	kg	8.96E-03	0.00E+00	0.00E+00
39	Sand, quartz, in ground	Raw	kg	0.00E+00	0.00E+00	2.83E-06
40	Scrap, external	Raw	kg	0.00E+00	0.00E+00	9.91E-02
41	Seed corn	Raw	kg	0.00E+00	0.00E+00	1.37E-06
42	Sodium carbonate, in ground	Raw	kg	0.00E+00	0.00E+00	3.30E-04
43	Sodium chloride	Raw	kg	0.00E+00	1.95E-03	4.17E+00
44	Sodium chloride, in ground	Raw	kg	0.00E+00	0.00E+00	3.23E-04
45	Sodium sulfate	Raw	kg	0.00E+00	0.00E+00	7.72E-04
46	Sodium sulphate, various forms, in ground	Raw	kg	0.00E+00	0.00E+00	1.02E-03
47	Sulfur, in ground	Raw	kg	0.00E+00	0.00E+00	9.65E-05
48	Sylvinite, in ground	Raw	kg	0.00E+00	0.00E+00	1.19E-05
49	Uranium	Raw	kg	0.00E+00	0.00E+00	1.99E-03
50	Uranium oxide, 332 GJ per kg, in ore	Raw	kg	4.44E-06	5.06E-04	3.20E-04
51	Uranium, 2291 GJ per kg	Raw	kg	0.00E+00	1.97E-06	3.26E-11
52	Uranium, 2291 GJ per kg, in ground	Raw	kg	0.00E+00	0.00E+00	2.33E-09
53	Uranium, in ground	Raw	kg	0.00E+00	0.00E+00	9.30E-09
54	Water, cooling, unspecified natural origin/kg	Raw	kg	0.00E+00	5.72E-04	2.84E-01

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
55	Water, cooling, unspecified natural origin/m ³	Raw	m ³	0.00E+00	1.51E-01	2.44E-01
56	Water, process, surface	Raw	kg	0.00E+00	1.84E+02	3.39E+00
57	Water, process, unspecified natural origin/kg	Raw	kg	0.00E+00	1.06E-02	5.26E+00
58	Water, process, unspecified natural origin/m ³	Raw	m ³	0.00E+00	4.08E-05	1.81E-06
59	Water, process, well	Raw	kg	0.00E+00	8.04E+01	7.64E-01
60	Water, process, well, in ground	Raw	kg	0.00E+00	1.32E-03	6.56E-01
61	Water, river	Raw	m ³	0.00E+00	0.00E+00	4.33E-06
62	Water, unspecified natural origin, RoW	Raw	m ³	0.00E+00	2.64E-04	1.78E-06
63	Water, unspecified natural origin, US	Raw	m ³	0.00E+00	3.85E-01	0.00E+00
64	Water, unspecified natural origin/m ³	Raw	m ³	1.03E-02	2.45E-04	1.21E-01
65	Water, well, in ground	Raw	m ³	0.00E+00	0.00E+00	2.51E-05
66	Water, well, in ground, US	Raw	m ³	0.00E+00	2.72E-03	0.00E+00
67	Wood and wood waste, 20.9 MJ per kg, oven-dry basis	Raw	kg	0.00E+00	2.09E+02	1.33E+00
68	Wood and wood waste, 9.5 MJ per kg	Raw	kg	0.00E+00	0.00E+00	9.75E-02
69	Wood for fiber, feedstock	Raw	kg	0.00E+00	0.00E+00	2.09E-01
70	Wood, feedstock	Raw	kg	0.00E+00	0.00E+00	2.22E-01
71	Wood, soft, standing	Raw	m ³	0.00E+00	1.60E+00	1.53E-02
72	Wood, unspecified, standing/kg	Raw	kg	0.00E+00	0.00E+00	1.75E-02
73	2-chloroacetophenone	Air	kg	1.78E-12	3.53E-11	7.78E-10
74	2-methyl-4-chlorophenoxyacetic acid	Air	kg	0.00E+00	0.00E+00	2.55E-11
75	2,4-D	Air	kg	0.00E+00	0.00E+00	1.37E-09
76	5-methyl chrysene	Air	kg	1.82E-12	2.29E-10	1.47E-10
77	Acenaphthene	Air	kg	4.22E-11	5.31E-09	3.41E-09
78	Acenaphthylene	Air	kg	2.07E-11	2.60E-09	1.67E-09
79	Acetaldehyde	Air	kg	4.30E-05	8.70E-03	3.05E-03
80	Acetochlor	Air	kg	0.00E+00	0.00E+00	1.89E-08
81	Acetone	Air	kg	0.00E+00	9.82E-03	0.00E+00
82	Acetophenone	Air	kg	3.82E-12	7.56E-11	1.67E-09
83	Acrolein	Air	kg	5.21E-06	1.55E-03	1.50E-05
84	Alachlor	Air	kg	0.00E+00	0.00E+00	1.86E-09
85	Aldehydes, unspecified	Air	kg	1.31E-04	2.98E-04	2.75E-04
86	Ammonia	Air	kg	8.74E-05	2.67E-03	1.90E-04
87	Ammonium chloride	Air	kg	2.36E-07	2.68E-05	1.70E-05
88	Anthracene	Air	kg	1.74E-11	2.18E-09	1.40E-09
89	Antimony	Air	kg	1.49E-09	1.87E-07	1.27E-07
90	Arsenic	Air	kg	4.72E-08	4.37E-06	2.93E-06
91	Atrazine	Air	kg	0.00E+00	0.00E+00	3.69E-08
92	Barium	Air	kg	0.00E+00	0.00E+00	2.13E-07
93	Bentazone	Air	kg	0.00E+00	0.00E+00	1.51E-10
94	Benzene	Air	kg	5.25E-05	1.14E-02	7.96E-03
95	Benzene, chloro-	Air	kg	5.60E-12	1.11E-10	2.45E-09
96	Benzene, ethyl-	Air	kg	2.39E-11	6.57E-07	1.40E-07
97	Benzo(a)anthracene	Air	kg	6.63E-12	8.32E-10	5.35E-10
98	Benzo(a)pyrene	Air	kg	3.15E-12	3.95E-10	2.54E-10
99	Benzo(b,j,k)fluoranthene	Air	kg	9.11E-12	1.14E-09	7.36E-10
100	Benzo(g,h,i)perylene	Air	kg	2.24E-12	2.81E-10	1.81E-10
101	Benzo(ghi)perylene	Air	kg	0.00E+00	0.00E+00	7.74E-18
102	Benzyl chloride	Air	kg	1.78E-10	3.53E-09	7.78E-08
103	Beryllium	Air	kg	2.32E-09	2.33E-07	1.75E-07
104	Biphenyl	Air	kg	1.41E-10	1.77E-08	1.14E-08
105	Bromoform	Air	kg	9.92E-12	1.97E-10	4.34E-09
106	Bromoxynil	Air	kg	0.00E+00	0.00E+00	3.30E-10
107	BTEX (benzene, toluene, ethylbenzene, and xylene), unspecified ratio	Air	kg	5.98E-05	4.16E-03	8.15E-03
108	Butadiene	Air	kg	2.19E-06	1.63E-06	3.01E-08
109	Cadmium	Air	kg	1.15E-08	8.17E-07	8.36E-07
110	Carbofuran	Air	kg	0.00E+00	0.00E+00	2.82E-10
111	Carbon dioxide	Air	kg	2.81E-02	6.31E-02	2.23E+00
112	Carbon dioxide, biogenic	Air	kg	8.16E-03	3.69E+02	2.79E+00

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
113	Carbon dioxide, fossil	Air	kg	1.03E+01	1.01E+02	8.90E+01
114	Carbon disulfide	Air	kg	3.31E-11	6.55E-10	1.45E-08
115	Carbon monoxide	Air	kg	3.86E-06	9.06E-03	1.75E-02
116	Carbon monoxide, biogenic	Air	kg	0.00E+00	9.42E-01	3.65E-03
117	Carbon monoxide, fossil	Air	kg	9.46E-02	1.77E-01	1.36E-01
118	Chloride	Air	kg	6.25E-12	6.33E-10	4.04E-10
119	Chlorinated fluorocarbons and hydrochlorinated fluorocarbons, unspecified	Air	kg	0.00E+00	3.34E-10	6.69E-07
120	Chlorine	Air	kg	0.00E+00	3.99E-09	6.67E-06
121	Chloroform	Air	kg	1.50E-11	2.97E-10	6.56E-09
122	Chlorpyrifos	Air	kg	0.00E+00	0.00E+00	2.17E-09
123	Chromium	Air	kg	3.39E-08	3.08E-06	2.38E-06
124	Chromium VI	Air	kg	6.54E-09	8.22E-07	5.28E-07
125	Chrysene	Air	kg	8.28E-12	1.04E-09	6.69E-10
126	Cobalt	Air	kg	6.47E-08	1.25E-06	9.91E-07
127	Copper	Air	kg	5.81E-10	2.11E-08	5.61E-08
128	Cumene	Air	kg	1.35E-12	2.34E-05	1.16E-02
129	Cyanazine	Air	kg	0.00E+00	0.00E+00	3.25E-10
130	Cyanide	Air	kg	6.36E-10	1.26E-08	2.78E-07
131	Dicamba	Air	kg	0.00E+00	0.00E+00	1.92E-09
132	Dimethenamid	Air	kg	0.00E+00	0.00E+00	4.53E-09
133	Dimethyl ether	Air	kg	0.00E+00	1.69E-07	8.38E-05
134	Dinitrogen monoxide	Air	kg	1.75E-04	1.46E-03	1.10E-03
135	Dioxin, 2,3,7,8 tetrachlorodibenzo-p-	Air	kg	2.09E-13	8.88E-12	1.46E-09
136	Dioxins, measured as 2,3,7,8-tetrachlorodibenzo-p-dioxin	Air	kg	0.00E+00	0.00E+00	3.56E-19
137	Dipropylthiocarbamic acid S-ethyl ester	Air	kg	0.00E+00	0.00E+00	3.10E-09
138	Ethane, 1,1,1-trichloro-, HCFC-140	Air	kg	3.08E-10	7.65E-10	2.84E-09
139	Ethane, 1,2-dibromo-	Air	kg	3.05E-13	6.26E-12	1.33E-10
140	Ethane, 1,2-dichloro-	Air	kg	1.02E-11	2.02E-10	4.45E-09
141	Ethane, chloro-	Air	kg	1.07E-11	2.12E-10	4.67E-09
142	Ethene, tetrachloro-	Air	kg	4.27E-09	4.52E-07	2.96E-07
143	Ethene, trichloro-	Air	kg	0.00E+00	0.00E+00	3.29E-13
144	Ethylene oxide	Air	kg	0.00E+00	1.34E-08	5.98E-10
145	Fluoranthene	Air	kg	5.88E-11	7.39E-09	4.75E-09
146	Fluorene	Air	kg	7.54E-11	9.47E-09	6.09E-09
147	Fluoride	Air	kg	3.36E-07	8.34E-07	5.34E-06
148	Formaldehyde	Air	kg	6.67E-05	4.14E-03	4.66E-03
149	Furan	Air	kg	3.79E-13	5.11E-11	3.22E-11
150	Glyphosate	Air	kg	0.00E+00	0.00E+00	4.07E-09
151	HAPs	Air	kg	0.00E+00	1.05E-03	7.09E-06
152	HAPs, unspecified	Air	kg	0.00E+00	0.00E+00	8.28E-08
153	Heat, waste	Air	MJ	0.00E+00	6.31E-01	1.21E+01
154	Hexane	Air	kg	1.70E-11	3.38E-10	2.23E-04
155	Hydrazine, methyl-	Air	kg	4.33E-11	8.57E-10	1.89E-08
156	Hydrocarbons, unspecified	Air	kg	1.36E-06	1.55E-04	7.37E-03
157	Hydrogen	Air	kg	0.00E+00	1.26E-08	6.15E-06
158	Hydrogen chloride	Air	kg	1.06E-04	1.27E-02	8.06E-03
159	Hydrogen fluoride	Air	kg	1.24E-05	1.56E-03	9.98E-04
160	Hydrogen sulfide	Air	kg	2.02E-13	2.04E-11	1.31E-11
161	Indeno(1,2,3-cd)pyrene	Air	kg	5.05E-12	6.35E-10	4.08E-10
162	Iron	Air	kg	0.00E+00	0.00E+00	2.13E-07
163	Isophorone	Air	kg	1.48E-10	2.92E-09	6.45E-08
164	Isoprene	Air	kg	2.05E-04	2.07E-02	1.33E-02
165	Kerosene	Air	kg	1.13E-07	1.29E-05	8.13E-06
166	Lead	Air	kg	5.24E-08	3.38E-05	3.88E-06
167	Magnesium	Air	kg	9.11E-07	1.14E-04	7.36E-05
168	Manganese	Air	kg	7.02E-08	5.30E-06	5.44E-06
169	Mercaptans, unspecified	Air	kg	5.47E-08	1.08E-06	2.41E-05
170	Mercury	Air	kg	9.31E-09	1.25E-06	2.04E-06
171	Metals, unspecified	Air	kg	2.32E-14	2.35E-12	3.73E-05
172	Methane	Air	kg	1.42E-02	2.56E-01	3.71E-01
173	Methane, biogenic	Air	kg	0.00E+00	3.73E-03	2.52E-05

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
174	Methane, bromo-, Halon 1001	Air	kg	4.07E-11	8.07E-10	1.78E-08
175	Methane, chlorodifluoro-, HCFC-22	Air	kg	0.00E+00	1.12E-13	4.97E-15
176	Methane, chlorotrifluoro-, CFC-13	Air	kg	0.00E+00	1.06E-12	4.72E-14
177	Methane, dichloro-, HCC-30	Air	kg	7.21E-08	3.28E-06	2.72E-06
178	Methane, dichlorodifluoro-, CFC-12	Air	kg	3.75E-10	8.22E-10	7.63E-10
179	Methane, fossil	Air	kg	1.08E-03	2.57E-02	4.66E-02
180	Methane, monochloro-, R-40	Air	kg	1.35E-10	2.67E-09	5.89E-08
181	Methane, tetrachloro-, CFC-10	Air	kg	3.75E-11	4.31E-10	6.83E-07
182	Methanol	Air	kg	0.00E+00	9.99E-03	1.22E-01
183	Methyl ethyl ketone	Air	kg	9.92E-11	1.97E-09	4.34E-08
184	Methyl methacrylate	Air	kg	5.09E-12	1.01E-10	2.22E-09
185	Metolachlor	Air	kg	0.00E+00	0.00E+00	1.50E-08
186	Metribuzin	Air	kg	0.00E+00	0.00E+00	6.93E-11
187	N-nitrodimethylamine	Air	kg	0.00E+00	0.00E+00	7.34E-14
188	Naphthalene	Air	kg	1.34E-08	1.00E-05	6.56E-07
189	Nickel	Air	kg	8.18E-07	6.08E-06	6.78E-06
190	Nitrogen oxides	Air	kg	1.87E-01	7.11E-01	2.17E-01
191	Nitrogen, total	Air	kg	6.36E-06	0.00E+00	1.83E-09
192	NMVOC, nonmethane volatile organic compounds, unspecified origin	Air	kg	6.36E-03	1.61E-02	3.35E-02
193	Organic acids	Air	kg	8.66E-10	9.86E-08	6.24E-08
194	Organic substances, unspecified	Air	kg	5.14E-07	7.12E-04	5.94E-05
195	Other organic	Air	kg	0.00E+00	3.54E-05	2.39E-07
196	PAH, polycyclic aromatic hydrocarbons	Air	kg	9.42E-06	6.94E-06	2.51E-05
197	Paraquat	Air	kg	0.00E+00	0.00E+00	3.03E-10
198	Parathion, methyl	Air	kg	0.00E+00	0.00E+00	2.29E-10
199	Particulates	Air	kg	0.00E+00	8.26E-08	4.09E-05
200	Particulates, <10 um	Air	kg	0.00E+00	1.47E-01	1.01E-01
201	Particulates, <2.5 um	Air	kg	0.00E+00	7.63E-02	5.04E-02
202	Particulates, >10 um	Air	kg	0.00E+00	4.26E-04	1.94E-04
203	Particulates, >2.5 um, and < 10 um	Air	kg	5.74E-03	1.02E-02	6.67E-03
204	Particulates, unspecified	Air	kg	1.04E-03	3.65E-02	1.45E-01
205	Pendimethalin	Air	kg	0.00E+00	0.00E+00	1.56E-09
206	Permethrin	Air	kg	0.00E+00	0.00E+00	1.40E-10
207	Phenanthrene	Air	kg	2.24E-10	2.81E-08	1.81E-08
208	Phenol	Air	kg	4.07E-12	2.20E-04	8.29E-05
209	Phenols, unspecified	Air	kg	3.76E-08	3.65E-07	5.49E-07
210	Phorate	Air	kg	0.00E+00	0.00E+00	7.17E-11
211	Phosphate	Air	kg	1.46E-07	0.00E+00	0.00E+00
212	Phthalate, dioctyl-	Air	kg	1.86E-11	3.68E-10	8.12E-09
213	Polycyclic organic matter, unspecified	Air	kg	0.00E+00	2.70E-12	1.20E-13
214	Potassium	Air	kg	0.00E+00	0.00E+00	3.78E-05
215	Propanal	Air	kg	9.67E-11	8.61E-06	3.83E-03
216	Propene	Air	kg	1.45E-04	1.15E-04	4.27E-03
217	Propylene oxide	Air	kg	0.00E+00	5.94E-07	1.18E-07
218	Pyrene	Air	kg	2.73E-11	3.43E-09	2.21E-09
219	Radioactive species, unspecified	Air	Bq	4.68E+03	5.88E+05	3.72E+05
220	Radionuclides (including radon)	Air	kg	6.31E-06	7.19E-04	4.55E-04
221	Selenium	Air	kg	1.16E-07	1.36E-05	8.88E-06
222	Simazine	Air	kg	0.00E+00	0.00E+00	9.83E-10
223	Sodium	Air	kg	0.00E+00	0.00E+00	8.73E-07
224	Styrene	Air	kg	6.36E-12	1.26E-10	2.78E-09
225	Sulfur	Air	kg	0.00E+00	0.00E+00	4.60E-06
226	Sulfur dioxide	Air	kg	6.82E-03	6.35E-01	7.93E-01
227	Sulfur monoxide	Air	kg	1.04E-02	2.55E-02	3.44E-03
228	Sulfur oxides	Air	kg	1.33E-04	3.64E-04	2.08E-02
229	Sulfur, total reduced	Air	kg	0.00E+00	0.00E+00	2.70E-06
230	Sulfuric acid, dimethyl ester	Air	kg	1.22E-11	2.42E-10	5.34E-09
231	t-butyl methyl ether	Air	kg	8.91E-12	1.76E-10	3.89E-09
232	Tar	Air	kg	7.03E-12	7.11E-10	4.55E-10
233	Terbufos	Air	kg	0.00E+00	0.00E+00	2.45E-09
234	TOC, total organic carbon	Air	kg	0.00E+00	0.00E+00	3.57E-06
235	Toluene	Air	kg	2.29E-05	1.96E-05	8.51E-07

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
236	Toluene, 2,4-dinitro-	Air	kg	7.12E-14	1.41E-12	3.11E-11
237	Vinyl acetate	Air	kg	1.93E-12	3.83E-11	8.45E-10
238	VOC, volatile organic compounds	Air	kg	5.02E-03	2.01E-01	4.90E-01
239	Wood (dust)	Air	kg	0.00E+00	1.05E-01	7.64E-04
240	Xylene	Air	kg	1.60E-05	1.31E-05	4.71E-07
241	Zinc	Air	kg	1.18E-07	1.41E-08	2.51E-07
242	2-hexanone	Water	kg	8.00E-08	5.14E-07	8.36E-07
243	2-methyl-4-chlorophenoxyacetic acid	Water	kg	0.00E+00	0.00E+00	1.09E-12
244	2-propanol	Water	kg	0.00E+00	0.00E+00	2.54E-09
245	2,4-D	Water	kg	0.00E+00	0.00E+00	5.86E-11
246	4-methyl-2-pentanone	Water	kg	5.15E-08	3.31E-07	5.38E-07
247	Acetaldehyde	Water	kg	0.00E+00	1.42E-08	6.29E-10
248	Acetochlor	Water	kg	0.00E+00	0.00E+00	8.11E-10
249	Acetone	Water	kg	1.22E-07	7.87E-07	1.28E-06
250	Acidity, unspecified	Water	kg	0.00E+00	0.00E+00	1.05E-14
251	Acids, unspecified	Water	kg	1.31E-10	1.33E-08	3.61E-06
252	Alachlor	Water	kg	0.00E+00	0.00E+00	7.99E-11
253	Aluminium	Water	kg	1.05E-03	3.45E-03	4.18E-03
254	Aluminum	Water	kg	0.00E+00	0.00E+00	1.02E-05
255	Ammonia	Water	kg	2.28E-04	1.19E-03	1.75E-03
256	Ammonia, as N	Water	kg	6.60E-11	6.67E-09	4.26E-09
257	Ammonium, ion	Water	kg	5.04E-08	1.98E-04	5.68E-06
258	Antimony	Water	kg	6.52E-07	2.01E-06	2.49E-06
259	Arsenic	Water	kg	3.62E-06	1.90E-05	2.97E-05
260	Arsenic, ion	Water	kg	0.00E+00	0.00E+00	1.25E-11
261	Atrazine	Water	kg	0.00E+00	0.00E+00	1.58E-09
262	Barium	Water	kg	1.43E-02	4.61E-02	5.85E-02
263	Bentazone	Water	kg	0.00E+00	0.00E+00	6.45E-12
264	Benzene	Water	kg	2.05E-05	1.70E-04	1.92E-02
265	Benzene, 1-methyl-4-(1-methylethyl)-	Water	kg	1.22E-09	7.86E-09	1.28E-08
266	Benzene, ethyl-	Water	kg	1.16E-06	7.42E-06	1.21E-05
267	Benzene, pentamethyl-	Water	kg	9.18E-10	5.90E-09	9.60E-09
268	Benzenes, alkylated, unspecified	Water	kg	5.72E-07	1.76E-06	2.18E-06
269	Benzo(a)pyrene	Water	kg	0.00E+00	0.00E+00	3.71E-10
270	Benzoic acid	Water	kg	1.24E-05	7.98E-05	1.30E-04
271	Beryllium	Water	kg	1.86E-07	9.27E-07	1.41E-06
272	Biphenyl	Water	kg	3.70E-08	1.14E-07	1.41E-07
273	BOD5, biological oxygen demand	Water	kg	2.24E-03	1.47E-02	2.02E-01
274	Boron	Water	kg	3.84E-05	2.47E-04	4.02E-04
275	Bromide	Water	kg	2.62E-03	1.69E-02	2.75E-02
276	Bromoxynil	Water	kg	0.00E+00	0.00E+00	8.54E-12
277	Cadmium	Water	kg	5.85E-07	2.84E-06	1.06E-05
278	Cadmium, ion	Water	kg	0.00E+00	0.00E+00	3.04E-11
279	Calcium	Water	kg	3.93E-02	2.53E-01	4.12E-01
280	Calcium, ion	Water	kg	0.00E+00	0.00E+00	1.47E-07
281	Carbofuran	Water	kg	0.00E+00	0.00E+00	1.21E-11
282	CFCs, unspecified	Water	kg	0.00E+00	0.00E+00	2.54E-09
283	Chloride	Water	kg	4.42E-01	2.84E+00	4.63E+00
284	Chlorpyrifos	Water	kg	0.00E+00	0.00E+00	9.30E-11
285	Chromate	Water	kg	0.00E+00	0.00E+00	5.84E-13
286	Chromium	Water	kg	2.79E-05	6.30E-05	9.18E-05
287	Chromium III	Water	kg	2.14E-06	2.83E-05	2.08E-05
288	Chromium VI	Water	kg	1.16E-07	2.54E-07	2.35E-07
289	Chromium, ion	Water	kg	0.00E+00	0.00E+00	7.85E-12
290	Cobalt	Water	kg	2.71E-07	1.74E-06	2.84E-06
291	COD, chemical oxygen demand	Water	kg	4.24E-03	2.47E-02	2.23E-01
292	Copper	Water	kg	3.65E-06	2.01E-05	2.49E-05
293	Copper, ion	Water	kg	0.00E+00	0.00E+00	1.30E-11
294	Cumene	Water	kg	0.00E+00	5.62E-05	2.78E-02
295	Cyanazine	Water	kg	0.00E+00	0.00E+00	1.39E-11
296	Cyanide	Water	kg	8.84E-10	5.72E-09	5.17E-08
297	Decane	Water	kg	3.57E-07	2.29E-06	3.73E-06
298	Detergent, oil	Water	kg	1.03E-05	7.43E-05	1.24E-04

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
299	Dibenzofuran	Water	kg	2.33E-09	1.50E-08	2.44E-08
300	Dibenzothiophene	Water	kg	2.00E-09	1.25E-08	2.02E-08
301	Dicamba	Water	kg	0.00E+00	0.00E+00	8.22E-11
302	Dimethenamid	Water	kg	0.00E+00	0.00E+00	1.94E-10
303	Dipropylthiocarbamic acid S-ethyl ester	Water	kg	0.00E+00	0.00E+00	8.02E-11
304	Disulfoton	Water	kg	0.00E+00	0.00E+00	4.79E-12
305	Diuron	Water	kg	0.00E+00	0.00E+00	1.35E-12
306	DOC, dissolved organic carbon	Water	kg	4.03E-13	1.04E-04	5.13E-02
307	Docosane	Water	kg	1.31E-08	8.42E-08	1.37E-07
308	Dodecane	Water	kg	6.77E-07	4.35E-06	7.09E-06
309	Eicosane	Water	kg	1.87E-07	1.20E-06	1.95E-06
310	Fluorene	Water	kg	0.00E+00	2.65E-13	1.18E-14
311	Fluorene, 1-methyl-	Water	kg	1.39E-09	8.95E-09	1.46E-08
312	Fluorenes, alkylated, unspecified	Water	kg	3.31E-08	1.02E-07	1.26E-07
313	Fluoride	Water	kg	8.13E-04	9.34E-05	5.91E-05
314	Fluorine	Water	kg	1.64E-08	5.40E-08	6.93E-08
315	Furan	Water	kg	0.00E+00	0.00E+00	9.30E-11
316	Glyphosate	Water	kg	0.00E+00	0.00E+00	1.74E-10
317	Hexadecane	Water	kg	7.39E-07	4.75E-06	7.73E-06
318	Hexanoic acid	Water	kg	2.57E-06	1.65E-05	2.69E-05
319	Hydrocarbons, unspecified	Water	kg	5.05E-13	5.11E-11	9.08E-05
320	Iron	Water	kg	2.09E-03	8.09E-03	1.06E-02
321	Lead	Water	kg	7.14E-06	3.25E-05	4.75E-05
322	Lead-210/kg	Water	kg	1.27E-15	8.17E-15	1.33E-14
323	Lithium	Water	kg	8.38E-04	5.74E-02	1.12E-01
324	Lithium, ion	Water	kg	0.00E+00	0.00E+00	2.34E-09
325	m-xylene	Water	kg	3.71E-07	2.38E-06	3.88E-06
326	Magnesium	Water	kg	7.69E-03	4.94E-02	8.05E-02
327	Manganese	Water	kg	1.37E-05	2.62E-04	2.46E-04
328	Mercury	Water	kg	1.56E-08	4.27E-08	7.87E-06
329	Metallic ions, unspecified	Water	kg	6.16E-12	6.23E-10	2.82E-04
330	Methane, monochloro-, R-40	Water	kg	4.93E-10	3.17E-09	5.16E-09
331	Methyl ethyl ketone	Water	kg	9.86E-10	6.33E-09	1.03E-08
332	Metolachlor	Water	kg	0.00E+00	0.00E+00	6.41E-10
333	Metribuzin	Water	kg	0.00E+00	0.00E+00	2.97E-12
334	Molybdenum	Water	kg	2.82E-07	1.81E-06	2.94E-06
335	n-hexacosane	Water	kg	8.18E-09	5.25E-08	8.55E-08
336	Naphthalene	Water	kg	2.23E-07	1.43E-06	2.33E-06
337	Naphthalene, 2-methyl-	Water	kg	1.94E-07	1.25E-06	2.03E-06
338	Naphthalenes, alkylated, unspecified	Water	kg	9.37E-09	2.89E-08	3.57E-08
339	Nickel	Water	kg	3.43E-06	1.63E-05	2.48E-05
340	Nickel, ion	Water	kg	0.00E+00	0.00E+00	2.94E-13
341	Nitrate	Water	kg	4.42E-14	4.47E-12	3.02E-07
342	Nitrate compounds	Water	kg	1.78E-12	1.80E-10	1.15E-10
343	Nitric acid	Water	kg	3.99E-09	4.04E-07	2.58E-07
344	Nitrogen, total	Water	kg	1.25E-07	1.43E-05	3.37E-05
345	o-cresol	Water	kg	3.52E-07	2.26E-06	3.69E-06
346	o-xylene	Water	kg	0.00E+00	5.63E-13	2.50E-14
347	Octadecane	Water	kg	1.83E-07	1.17E-06	1.91E-06
348	Oils, unspecified	Water	kg	2.82E-04	1.69E-03	2.66E-03
349	Organic substances, unspecified	Water	kg	0.00E+00	0.00E+00	2.73E-09
350	p-cresol	Water	kg	3.80E-07	2.44E-06	3.98E-06
351	p-xylene	Water	kg	0.00E+00	5.63E-13	2.50E-14
352	Paraquat	Water	kg	0.00E+00	0.00E+00	1.30E-11
353	Parathion, methyl	Water	kg	0.00E+00	0.00E+00	9.81E-12
354	Pendimethalin	Water	kg	0.00E+00	0.00E+00	6.67E-11
355	Permethrin	Water	kg	0.00E+00	0.00E+00	6.00E-12
356	Phenanthrene	Water	kg	3.37E-09	1.40E-08	2.01E-08
357	Phenanthrenes, alkylated, unspecified	Water	kg	3.89E-09	1.20E-08	1.48E-08
358	Phenol	Water	kg	5.11E-06	1.12E-05	1.08E-05
359	Phenol, 2,4-dimethyl-	Water	kg	3.43E-07	2.20E-06	3.59E-06
360	Phenols, unspecified	Water	kg	1.06E-06	2.55E-05	4.87E-05
361	Phorate	Water	kg	0.00E+00	0.00E+00	1.85E-12

No	Substance	Type	Unit	Forest operations	Dry veneer production	LVL production
362	Phosphate	Water	kg	6.11E-04	0.00E+00	2.43E-05
363	Phosphorus	Water	kg	0.00E+00	0.00E+00	5.20E-06
364	Phosphorus compounds, unspecified	Water	kg	0.00E+00	0.00E+00	3.44E-08
365	Phosphorus, total	Water	kg	0.00E+00	0.00E+00	3.07E-06
366	Process solvents, unspecified	Water	kg	0.00E+00	0.00E+00	9.30E-09
367	Propene	Water	kg	0.00E+00	2.07E-05	1.03E-02
368	Radioactive species, nuclides, unspecified	Water	Bq	7.32E+00	8.34E+02	5.27E+02
369	Radium-226/kg	Water	kg	4.43E-13	2.84E-12	4.63E-12
370	Radium-228/kg	Water	kg	2.26E-15	1.45E-14	2.37E-14
371	Selenium	Water	kg	1.44E-07	2.40E-06	1.76E-06
372	Silver	Water	kg	2.57E-05	1.65E-04	2.69E-04
373	Simazine	Water	kg	0.00E+00	0.00E+00	4.21E-11
374	Sodium	Water	kg	1.25E-01	8.01E-01	1.31E+00
375	Sodium, ion	Water	kg	0.00E+00	0.00E+00	4.66E-07
376	Solids, inorganic	Water	kg	1.02E-11	1.03E-09	6.56E-10
377	Solved solids	Water	kg	0.00E+00	5.60E-07	3.33E-04
378	Strontium	Water	kg	6.68E-04	4.29E-03	6.98E-03
379	Styrene	Water	kg	0.00E+00	8.11E-13	3.58E-10
380	Sulfate	Water	kg	9.93E-04	1.74E-02	1.68E-02
381	Sulfide	Water	kg	5.93E-07	1.31E-06	3.47E-05
382	Sulfur	Water	kg	3.25E-05	2.08E-04	3.39E-04
383	Sulfuric acid	Water	kg	0.00E+00	0.00E+00	2.73E-10
384	Surfactants	Water	kg	0.00E+00	2.60E-11	1.16E-12
385	Suspended solids, unspecified	Water	kg	5.78E-01	3.61E+00	6.02E+00
386	Tar	Water	kg	1.01E-13	1.02E-11	6.50E-12
387	Terbufos	Water	kg	0.00E+00	0.00E+00	6.33E-11
388	Tetradecane	Water	kg	2.97E-07	1.91E-06	3.11E-06
389	Thallium	Water	kg	1.37E-07	4.24E-07	5.25E-07
390	Tin	Water	kg	2.67E-06	1.16E-05	1.68E-05
391	Titanium	Water	kg	1.00E-05	3.09E-05	3.82E-05
392	Titanium, ion	Water	kg	0.00E+00	0.00E+00	3.79E-11
393	TOC, total organic carbon	Water	kg	0.00E+00	1.04E-04	5.13E-02
394	Toluene	Water	kg	1.94E-05	1.25E-04	2.03E-04
395	Vanadium	Water	kg	3.33E-07	2.14E-06	3.48E-06
396	Wastewater/m ³	Water	m ³	0.00E+00	0.00E+00	7.67E-04
397	Xylene	Water	kg	1.04E-05	6.54E-05	1.06E-04
398	Yttrium	Water	kg	8.25E-08	5.30E-07	8.63E-07
399	Zinc	Water	kg	2.42E-05	8.74E-05	1.06E-04
400	Zinc, ion	Water	kg	0.00E+00	0.00E+00	4.10E-07
401	Waste in inert landfill	Waste	kg	0.00E+00	0.00E+00	8.63E-01
402	Waste to recycling	Waste	kg	0.00E+00	0.00E+00	3.95E-01
403	Waste, solid	Waste	kg	0.00E+00	0.00E+00	1.10E-02

20 APPENDIX F: PRODUCTION FACILITY SURVEY QUESTIONNAIRES

CORRIM SURVEY

The Consortium for Research on Renewable Industrial Materials (CORRIM)

Laminated Veneer Lumber (LVL) and Composite I-Joist Plants 2014

The information from this survey will be used in a project by CORRIM, a consortium of universities, industry, and government groups. In collaboration with the USDA Forest Service Forest Products Laboratory, APA-The Engineered Wood Association, and the American Wood Council, CORRIM is updating life-cycle assessment data that describes environmental impacts of building materials. This CORRIM survey is designed specifically for LVL and composite I-joist plants. There are three sections for this survey. The three sections are the LVL plant (pg. 3-11), the veneer mill (pg. 12-19), and the I-joist plant (pg. 20-29). Please complete the section(s) that apply to your facilities. Emission data are requested for each section.

Questions will be concentrated on **annual production**, electricity production and usage, fuel consumption, material flows, and environmental emissions. We realize that you may not have all the information requested, especially when it comes to specific equipment/processing groups or what we call ‘machine centers’. The data you are able to provide will be appreciated.

Your data will be confidential; only weight-averaged values based on production for the industry will be reported.

Company: _____

Facility Site (city, state): _____

Should we have a follow-up question about the data, please provide the name and the following information for the contact in your company.

Name: _____

Title: _____

Telephone: _____

Email: _____

Please send the complete survey to the following email or address by March 3rd. If you have questions about the survey, contact:

Rick Bergman
Research Forest Products Technologist,
USDA Forest Service Forest Products Laboratory
One Gifford Pinchot Dr,
Madison, WI 53726-2398
(608) 231-9477 (ph) / (608) 231-9508 (fax)
rbergman@fs.fed.us

General Plant Information

Yes	No	Equipment in mill
☐	☐	Veneer dryer (for redry)
☐	☐	conventional steam, #: _____
☐	☐	high temp (>212F) steam # _____
☐	☐	direct fire, # _____
☐	☐	continuous, # _____
☐	☐	other: _____
☐	☐	Hot pressing
☐	☐	Hot press(es), # _____
		year built or updated: _____
☐	☐	heating system
☐	☐	hot oil (fired by nat. gas)
☐	☐	microwave
☐	☐	radio-frequency
		pressure (psig) _____
		temperature (°F) _____
		press time (min:sec) _____
☐	☐	Precipitator
☐	☐	Bag house
☐	☐	Other pollution controls?
☐	☐	Layup of LVL billets
☐	☐	Resin
☐	☐	phenol-formaldehyde
☐	☐	other _____
☐	☐	other _____
		Inputs
☐	☐	PLV
☐	☐	veneer
☐	☐	Sawing/trimming of LVL
☐	☐	Resaw
☐	☐	Rip saw
☐	☐	In-line moisture meter
☐	☐	Automatic grading (visual grades)
☐	☐	Manual grading (visual grades)
☐	☐	Machine grading (MSR grades)
☐	☐	End Trim
☐	☐	Wrap LVL, material _____
☐	☐	Steel strapping
☐	☐	Plastic strapping
☐	☐	Cardboard corners
☐	☐	other: _____
☐	☐	other: _____
☐	☐	other: _____
☐	☐	Bag house
☐	☐	Other pollution control

Yes	No	Equipment in mill (continued)
☐	☐	Boiler / cogen
☐	☐	wood boiler(s), # _____
☐	☐	gas boiler(s), # _____
☐	☐	oil boiler(s), # _____
☐	☐	propane boiler(s), # _____
☐	☐	Cogeneration unit
☐	☐	Bag house
☐	☐	Other pollution control?
☐	☐	Precipitator
☐	☐	other: _____
☐	☐	other: _____
☐	☐	other: _____
☐	☐	Buy steam
☐	☐	Sell electricity
☐	☐	Routing/shaping of web and flanges
☐	☐	Router(s), # _____
		Flanges
☐	☐	LSL
☐	☐	LVL
☐	☐	Lumber
☐	☐	Lumber (finger-jointed)
☐	☐	Assembly of I-joist
☐	☐	Resin
☐	☐	phenol-resorcinol-formaldehyde
☐	☐	emulsified polyurethane
☐	☐	other _____
		% MC (dry basis) _____
☐	☐	Sawing/curing of I-joists
☐	☐	Ripsaw
☐	☐	Oven(s), # _____
		Fuel source _____
☐	☐	Wrap LVL, material _____
☐	☐	Steel strapping
☐	☐	Plastic strapping
☐	☐	Cardboard corners
☐	☐	other: _____
☐	☐	Bag house
☐	☐	Other pollution control

LVL Plant Annual Wood Production Data

Reporting year _____ Starting month _____ Ending month _____

LVL Annual Production			
(Please provide units of measurement if different than stated)			Total Production
1.	Annual LVL production, 2012	ft ³	
	Annual LVL production, 2012	MSF 3/8 in. basis	
	Annual LVL production, 2012	Tons (%MC)	
2.	Veneer		
	a. Produced Veneer:		
	i. Used in Mill	MSF 3/8 in. basis	
	ii. Sold	MSF 3/8 in. basis	
	b. Purchased Veneer:		
	i. Dry	MSF 3/8 in. basis	
	ii. Green	MSF 3/8 in. basis	
	c. Sold Veneer		
	i. Dry	MSF 3/8 in. basis	
	ii. Green	MSF 3/8 in. basis	
	d. Purchased Parallel Laminated Veneer (PLV)	MSF 3/8 in. basis	
Transportation method(s) and average delivery distance for purchased veneer			
	Truck (% of total)		Average delivery miles
	Rail (% of total)		Average delivery miles
	Other (% of total)		Average delivery miles
	Total (%)	100%	
Transportation method(s) and average delivery distance for purchased PLV			
	Truck (% of total)		Average delivery miles
	Rail (% of total)		Average delivery miles
	Other (% of total)		Average delivery miles
	Total (%)	100%	

3. If you either peel/dry or dry veneer on-site, please be sure to complete the next section on veneer mills.

LVL Plant Annual Power and Fuel Consumption

If you have completed a **2012 Annual Fuel and Energy Survey for AF&PA**, you may want to attach the survey and skip to the next section entitled “Other Annual Production.” The first section refers to energy generation (non-transport fuel). (Please provide units of measurement if different)

Fuel	Unit	Quantity
Purchased electricity	kWh	
Purchased steam	lbs (°F)	
Wood Fuel <i>Self-generated</i>	Tons / (%MC)	/
Wood Fuel <i>Purchased</i>	Tons / (%MC)	/
Natural Gas	1000 ft ³	
Kerosene (fuel oil #1)	Gallons	
Fuel oil #2	Gallons	
Residual fuel oil #6 (Bunker C)	Gallons	
Diesel	Gallons	
Gasoline	Gallons	
Liquid Propane Gas	Gallons	
Total electricity for LVL plant	kWh	

If your facility produces any of the following for use on-site or for sale, please fill out the table. Enter N/A if not applicable.

Energy	Unit	Quantity (used on-site)	Quantity (sold off-site)
Electricity	kWh		
Steam	lbs (°F)		

If your facility has a boiler, please provide the following. Otherwise, enter N/A as applicable.

Boiler	Boiler size (million BTU/hr)	Boiler fuel	Boiler fuel unit	Quantity	Electricity to operate boiler (kWh)
#1					
#2					
#3					
#4					

LVL Plant Annual Transportation Fuel Use On-site

(includes all fuels for yard equipment, forklifts, and carriers)

Type	Total Quantity	Percent of total by unit process (percentage or volume)					Units	
		Veneer / PLV prep	Layup	Boiler	Hot press	Saw/ trimmer	Support vehicles	
Off-road diesel								Gallons
On-road diesel								Gallons
Propane								Gallons
Gasoline								Gallons
Electricity								kWh
Other								

Other LVL Plant Annual Use Data

Formulation and usage of resin, fillers, and other components			
Component Type	Percent of Solid by Weight (range is ok)	Total annual use (lbs.)	
Phenol formaldehyde			
Extender and filler			
Catalyst (NaOH)			
Water			
Other (please specify)			
Other (please specify)			
Transportation method and distance for resin			
Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		
Transportation method and distance for extender and filler			
Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		
Transportation method and distance for catalysts			
Truck (% of total)		Average delivery miles	

Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

Source of Heat for Press: direct or in-direct (circle one)			
Thermal Fluid (Hot Oil) heated by	Units		
Natural Gas	1000 ft ³		
Electricity	kWh		
Steam	lbs		
Radio Frequency	kWh		
Microwave Frequency	kWh		
Other	?		

LVL Plant Annual Wood Residue Production

Wood residues are any wood material produced in conjunction with making LVL and are called co-products in this survey. For each of the co-products produced at your plant, please indicate the weight (tons) of **annual** wood residue production for the reporting period that are shipped to other users, used internally as fuel or for the production of another co-product at your facility, stockpiled for future use or land filled (estimates are acceptable). If zero, enter a dash (-). Please state units if other than tons like cubic yards. The final column (Total Quantity) should equal the sum of the individual rows.

Estimate amount of wood residue produced per Msf of LVL _____ tons/Msf LVL

	Moisture Content (wet basis)	Sold (Shipped)	Used Internally (as fuel)	Used Internally (other uses)	Landfill	Inventory	Total Quantity
Wood residue	(%)	tons	tons	tons	tons	tons	Tons
Veneer loss							
PLV loss							
Lay-up scrap							
Panel trim							
Sawdust (sawing and trimming)							
Sawdust (rip saw)							
Tested LVL, used							
Other							

LVL Plant Ancillary Material Inputs

Ancillary Material	Used		Amount	How amount was found? <u>Mark one¹</u>		Where the ancillary material is emitted as a percent (estimation is ok)					
	Yes	No		M	E	Veneer / PLV prep	Layup	Boiler	Hot press	Saw/ trimmer	Comments
Hydraulic fluids	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Greases	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Motor Oil	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Plastic wrapping	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Cardboard packaging	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Steel strapping	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Plastic strapping	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Potable water	☐	☐	gal/yr	☐	☐	%	%	%	%	%	
Paints	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Waxes	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Other: _____	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Other: _____	☐	☐	lb/yr	☐	☐	%	%	%	%	%	
Other: _____	☐	☐	lb/yr	☐	☐	%	%	%	%	%	

¹ Estimated (E) / Measured (M)

LVL Plant Air Emissions

If air emission inventories are available, please provide as an alternative to the following table. Check here if inventory is attached ☐

Substance	Emit		Amount	How amount was found? ¹			Sampling method or source ²	Where the substance is emitted as a percent (estimation is ok)				
	Yes	No		M	E	PV		Veneer / PLV prep	Layup	Boiler	Hot press	Saw/ trimmer
Dust	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Particulate	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Particulate, PM10 ³	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Particulate, PM2.5 ⁴	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
VOC	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Sulfur dioxide	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Carbon monoxide	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Nitrous oxide	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: Total	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: Methanol	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: Formaldehyde	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: Acetaldehyde	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: Propionaldehyde	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: Acrolein	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: Phenol	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: Acetone	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAP: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Other organic ⁵ : _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Other inorganic ⁶ : _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%

¹ Estimated (E) / Measured (M)/ Permit value (PV): For example, from landfill fees, a permit, or measurement

² Sampling methods might be Method 25A, Method 5, NCASI 105. Estimates might be based on AP42, Standard Air Contaminate Discharge Permit or other source.

³ PM10 is particulate matter up to 10 micrometers in size

⁴ PM2.5 is particulate matter up to 2.5 micrometers in size

⁵ Non-HAP organics that are not included in VOC value.

⁶ Inorganics such as chlorine, mercury sulfur.

LVL Plant Water Emissions

If water emission inventories are available, please provide as an alternative to the following table. Check here if inventory is attached ☐

Substance	Emit		Amount ²	How amount was found <u>Mark one</u> ³			Sampling method or source ¹	Where the substance is emitted as a percent (estimation is ok)				
	Yes	No		M	E	PV		Veneer / PLV prep	Layup	Boiler	Hot press	Saw/ trimmer
Suspended solids	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
BOD	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
COD	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Oil and grease	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
HAPs	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Chemicals in boiler blowdown (if not included above)	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%	%

¹ Sampling methods is type of water test or how estimate was obtained.

² Report the mass of material, not the mass of material and water.

³ Estimated (E) / Measured (M)/ Permit value (PV): For example, from landfill fees, a permit, or measurement.

LVL Plant Solid Waste Production

If annual solid waste summary is available, please provide as an alternative to the following table. Check here if summary is attached ☐

Material	Amount ² (lb/yr)	Where material is going? Landfill (L) or recycled (R) <u>Mark one</u>	How amount was found? <u>Mark one</u> ¹			Where the solid waste is emitted as a percent (estimation is ok)				
			M	E	PV	Veneer / LVL prep	Layup	Boiler	Hot press	Saw/ trimmer
Discarded Wood		L / R	O	O	O	%	%	%	%	%
Discarded Bark		L / R	O	O	O	%	%	%	%	%
Dirt and rocks		L / R	O	O	O	%	%	%	%	%
Ash		L / R	O	O	O	%	%	%	%	%
Plastic wrap		L / R	O	O	O	%	%	%	%	%
Metal strapping		L / R	O	O	O	%	%	%	%	%
Plastic strapping		L / R	O	O	O	%	%	%	%	%
Other metals		L / R	O	O	O	%	%	%	%	%
Other organics		L / R	O	O	O	%	%	%	%	%
Other non-organics		L / R	O	O	O	%	%	%	%	%
Other: _____		L / R	O	O	O	%	%	%	%	%
Other: _____		L / R	O	O	O	%	%	%	%	%
Other: _____		L / R	O	O	O	%	%	%	%	%

¹ Estimated (E) / Measured (M)/ Permit value (PV): For example, from landfill fees, a permit, or measurement.

² Report the mass of material, for example, report wood separately from dirt and rocks.

LVL Plant Annual Water Use

Type	Total Quantity	Percent of total by unit process (percentage or volume; estimation is ok)					Units
		Veneer / LVL prep	Layup	Boiler	Hot press	Saw/ trimmer	
Input							
Surface water							Gallons
Groundwater							Gallons
Municipal water							Gallons
Output							
Water discharged							Gallons
Water recycled							Gallons

Recycling rate of water helps reduce the water footprint.

What percent of water is recycled?		%
Was water measured or estimated?		

LVL Plant Emission Control Device (ECD)

The following is a chart of emission control devices. Please fill in all information related to the control devices.

Emission Control Device (ECD)- Type, Electricity, Fuel Usage					
	ECD 1	ECD 2	ECD 3	ECD 4	ECD 5
Equipment controlled (i.e., boiler, press, dryer, etc.)					
Type					
Model					
Year Installed					
Electricity used to operate ECD; either kWh or % of total plant use					
Natural Gas used to operate ECD; either ft. ³ or % of total plant use					

Machine Center Breakdown for Electricity and Fuel Use

Fill in all that apply and for which you have data. If you **do not** have given machines center such as the co-generator, either draw **a line** through that row and **write N/A**.

Machine Center	Model/Type	Annual electricity	Fuel Usage
	Year Installed	kWh or % of the total use for mill	% of total use for mill
Co-generator			
Lay-up			
Press(es)			
#1			
#2			
#3			
#4			
Billet Cuts			
Rip Saw			

If you do not peel or dry veneer or produce I-joists, congratulations you have completed the survey! However, if you do, please complete the following pages.

Veneer Mill Annual Wood Production Data

Please fill in all the information that pertains just to your plant.

Type of veneer dryer: Longitudinal, Cross flow, Jet, Rotary (circle one)

Log scale: Dolye, International, Scribner, Weight base (circle one)

Total volume of incoming softwood logs	_____	thousand BF/year
Total volume of incoming green veneer	_____	thousand ft ² 3/8" basis/year
Total volume of veneer produced on-site	_____	thousand ft ² 3/8" basis/year
Total volume of veneer produced on-site used on-site	_____	thousand ft ² 3/8" basis/year

Please complete the following table showing the breakdown of the ***individual tree species*** and approximate ***sizes*** processed by your mill by species and the average log diameter. If less than 2% of total, use category labeled "Other".

Species	% of total log input into veneer mill	Log Diameter* (in)
Total	100%	

*Please provide individual log diameters if known otherwise please state the average or range of logs processed at your facility in bottom row under Log Diameter

Wood species processed into veneer and approximate percentage of total:			
Species	Volume (Msf 3/8")	%MC (wet basis)	Percent
Total			100%

MILEAGE: Over the Road _____ % By Rail _____ %

Total number of log deliveries made to this facility annually _____ # per year
Average one-way mileage travel to this facility to deliver logs _____ miles

Veneer Mill Annual Transportation Fuel Use On-site

(includes all fuels for yard equipment, forklifts, and carriers)

Type	Total Quantity	Percent of total by unit process (percentage or volume)					Units
		Bucking & Debarking	Block Conditioning	Peeling & Clipping	Drying	Support Vehicle	
Off-road diesel							Gallons
On-road diesel							Gallons
Propane							Gallons
Gasoline							Gallons
Electricity							kWh
Other							

Veneer Mill Annual (Non-Transportation) Fuel Use

(boilers, cogeneration units, etc.)

Fuel	Unit	Quantity
Total electricity for veneer mill	kWh	
Purchased steam	lbs (°F)	
Wood Fuel <i>Self-generated</i>	Tons / (%MC)	/
Wood Fuel <i>Purchased</i>	Tons / (%MC)	/
Natural Gas	1000 ft ³	
Kerosene (fuel oil #1)	Gallons	
Fuel oil #2	Gallons	
Residual fuel oil #6 (Bunker C)	Gallons	
Diesel	Gallons	
Gasoline	Gallons	
Liquid Propane Gas	Gallons	

If your facility has a boiler, please provide the following. Otherwise, enter N/A as applicable.

Boiler	Boiler size (million BTU/hr)	Boiler Fuel	Boiler Fuel Unit	Quantity	Electricity to operate boiler (kWh)
#1					
#2					
#3					
#4					

Veneer Mill Machine Center Breakdown

Fill in all that apply and for which you have data. If you do not have a given machine center, draw a line through that row and write None. Please provide units.

	Model/Type	Annual Electricity Usage	Fuel Usage
Machine Center	Year Installed	kWh or % of total electricity use for mill (Estimation is ok)	% of total use for mill (Estimation is ok)
Bucking & Debarking			
Log Conditioning			
Peeling & Clipping			
Drying			
Energy Generation			
Emissions control			
Total veneer mill			

Veneer Mill Annual Wood Residue Production

This is a general material flow survey for veneer mills. Wood residues are any wood material produced in conjunction with making LVL and are called co-products in this survey. This survey is designed to trace all wood components generated during production.

Estimate amount of wood residue produced per Msf of veneer _____tons/Msf veneer

Wood residue	Moisture Content (wet basis) (%)	Sold (Shipped) tons	Used Internally (as fuel) tons	Used Internally (other uses) tons	Landfill tons	Total Quantity Tons
Bark, green						
Roundup wood, green						
Peeler core, green						
Clippings, green						
Veneer downfall						
Trim , green						
Chips, green						
Hogged material						
Waste gate material						
Clippings, green						
Other						

For dryer(s), check heat source and give the annual fuel consumption: **indirect** or **direct (circle one)**

Heat source		
☐ Steam	lbs	
☐ Natural gas direct-fired	ft ³	
☐ Wood fuel	Tons (%MC)	/
☐ Other		

Veneer moisture content information

Average moisture content into dryer	% ovendry basis	
Average moisture content out of dryer	% ovendry basis	
Redry rate	%	

Transportation method and distance for veneer logs

Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

Veneer Mill Ancillary Material Inputs

Ancillary Material	Used		Amount	How amount was found? <u>Mark one¹</u>		Where the ancillary material is emitted as a percent (estimation is ok)				
	Yes	No		M	E	Bucking & Debarking	Block Conditioning	Peeling & Clipping	Drying	Comments
Hydraulic fluids	☐	☐	lb/yr	☐	☐	%	%	%	%	
Greases	☐	☐	lb/yr	☐	☐	%	%	%	%	
Motor Oil	☐	☐	lb/yr	☐	☐	%	%	%	%	
Plastic wrapping	☐	☐	lb/yr	☐	☐	%	%	%	%	
Cardboard packaging	☐	☐	lb/yr	☐	☐	%	%	%	%	
Steel strapping	☐	☐	lb/yr	☐	☐	%	%	%	%	
Plastic strapping	☐	☐	lb/yr	☐	☐	%	%	%	%	
Potable water	☐	☐	gal/yr	☐	☐	%	%	%	%	
Paints	☐	☐	lb/yr	☐	☐	%	%	%	%	
Waxes	☐	☐	lb/yr	☐	☐	%	%	%	%	
Runners	☐	☐	lb/yr	☐	☐	%	%	%	%	
Boiler chemicals	☐	☐	lb/yr	☐	☐	%	%	%	%	
Other: _____	☐	☐	lb/yr	☐	☐	%	%	%	%	
Other: _____	☐	☐	lb/yr	☐	☐	%	%	%	%	
Other: _____	☐	☐	lb/yr	☐	☐	%	%	%	%	

¹ Estimated (E) / Measured (M)

Veneer Mill Air Emissions

If air emission inventories are available, please provide as an alternative to the following table. Check here if inventory is attached ☐

Substance	Emit		Amount	How amount was found? <u>Mark one</u> ¹			Sampling method or source ²	Where the substance is emitted as a percent (estimation is ok)			
	Yes	No		M	E	PV		Bucking & Debarking	Block Conditioning	Peeling & Clipping	Drying
Dust	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Particulate	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Particulate, PM10 ³	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Particulate, PM2.5 ⁴	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
VOC	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Sulfur dioxide	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Carbon monoxide	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Nitrous oxide	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: Total	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: Methanol	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: Formaldehyde	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: Acetaldehyde	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: Propionaldehyde	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: Acrolein	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: Phenol	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: Acetone	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAP: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Other organic ⁵ : _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Other inorganic ⁶ : _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%

¹ Estimated (E) / Measured (M)/ Permit value (PV): For example, from landfill fees, a permit, or measurement

² Sampling methods might be Method 25A, Method 5, NCASI 105. Estimates might be based on AP42, Standard Air Contaminate Discharge Permit or other source.

³ PM10 is particulate matter up to 10 micrometers in size

⁴ PM2.5 is particulate matter up to 2.5 micrometers in size

⁵ Non-HAP organics that are not included in VOC value.

⁶ Inorganics such as chlorine, mercury sulfur.

Veneer Mill Water Emissions

If water emission inventories are available, please provide as an alternative to the following table. Check here if inventory is attached ☐

Substance	Emit		Amount ²	How amount was found? Mark one ³			Sampling method or source ¹	Where the substance is emitted as a percent (Estimation is ok)			
	Yes	No		M	E	PV		Bucking & Debarking	Block Conditioning	Peeling & Clipping	Drying
Suspended solids	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
BOD	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
COD	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Oil and grease	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
HAPs	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Chemicals in boiler blowdown (if not included above)	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%
Other: _____	☐	☐	lb/yr	☐	☐	☐		%	%	%	%

¹ Sampling methods is type of water test or how estimate was obtained.

² Report the mass of material, not the mass of material and water.

³ Estimated (E) / Measured (M)/ Permit value (PV): For example, from landfill fees, a permit, or measurement.

Veneer Mill Solid waste

If annual solid waste summary is available, please provide as an alternative to the following table.

Check here if summary is attached ☐

Material	Amount ² (lb/yr)	Where material is going? Landfill (L) or recycled (R)	How amount was found? <u>Mark one</u> ¹	Where the solid waste is emitted as a percent (estimation is ok)			
				Bucking & Debarking	Block Conditionin g	Peeling & Clipping	Drying
Discarded Wood		L / R	M / E / PV	%	%	%	%
Discarded Bark		L / R	M / E / PV	%	%	%	%
Dirt and rocks		L / R	M / E / PV	%	%	%	%
Ash		L / R	M / E / PV	%	%	%	%
Plastic wrap		L / R	M / E / PV	%	%	%	%
Plastic strapping		L / R	M / E / PV	%	%	%	%
Metal strapping		L / R	M / E / PV	%	%	%	%
Plastic bags		L / R	M / E / PV	%	%	%	%
Other metals		L / R	M / E / PV	%	%	%	%
Other organics		L / R	M / E / PV	%	%	%	%
Other non organics		L / R	M / E / PV	%	%	%	%
Other: _____		L / R	M / E / PV	%	%	%	%
Other: _____		L / R	M / E / PV	%	%	%	%
Other: _____		L / R	M / E / PV	%	%	%	%

¹ Estimated (E) / Measured (M) / Permit value (PV): For example, from landfill fees, a permit, or measurement.

² Report the mass of material, for example, report wood separately from dirt and rocks.

Veneer Mill Annual Water Use

Type	Total Quantity	Percent of total by unit process (percentage or volume)				Units
		Bucking & Debarking	Block Conditioning	Peeling & Clipping	Drying	
Input						
Surface water						Gallons
Groundwater						Gallons
Municipal water						Gallons
Output						
Water discharged						Gallons
Water recycled						Gallons

Recycling rate of water helps reduce the water footprint.

What percent of water is recycled?		%
Was water measured or estimated?		

2012 Composite I-joists Annual Production Plant Data

Please fill in all information relevant to producing I-joists. Please provide the data on an annual basis for the year which the data is reported.

Annual I-Joists Production for 2012			
Product (Series)	Amount (lin.ft.)	Joist Depth (in.)	Flange dim. (in. x in.)
I-joists Construction-Web			
Material	Percent of total	Annual consumption (MSF 3/8")	
OSB			
Plywood			
Total	100%		
Transportation Method and Delivery Distance for OSB			
Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		
Transportation Method and Delivery Distance for plywood			
Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

Estimate amount of wood residue produced per Msf of I-joist _____tons/Msf I-joist

	Moisture Content (wet basis)	Sold (Shipped)	Used Internally (as fuel)	Used Internally (other uses)	Landfill	Inventory	Total Quantity
Wood residue	(%)	tons	tons	tons	tons	tons	Tons
Sawdust, dry							
Other							
Other							

I-joists Construction-Flange

Material	Percent of total	Annual consumption (MSF 3/8")
LVL		
LSL		
Lumber (finger-jointed)		
Total	100%	

Transportation Method and Delivery Distance for LVL

Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

Transportation Method and Delivery Distance for LSL

Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

Transportation Method and Delivery Distance for lumber (finger-jointed)

Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

Annual Resin Consumption Data

Resin consumption is comprised of three different scenarios: 1) web-joint, 2) flange finger-joint, and 3) I-joist (web to flange)

1. Web-joint resin consumption			
Resin type			
Percent water			
Transportation Method and Delivery Distance for web-joint resin			
Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

- Please include the amount of resin used in the web-joints of the I-joist in this section. Please state whether weight is given as wet or dry weight.
- If you use the same resin for the web-joint, finger-joint, and web to flange-joint, complete the following table with total resin use and check this box ☐ ☒
- Otherwise, fill in resin use for web-joint only and then proceed to fill out resin data for flange finger-joints and I-joist (web to flange).

Formulation and usage of web-joint resin, fillers, and other components			
Component Type	Range % of Solid by Weight	Total Annual Use (lbs.)	Circle one
Resin			Wet or dry
Extender and filler			Wet or dry
Catalyst (NaOH)			Wet or dry
Water			
Other (please specify)			Wet or dry
Resin loss (lbs)			Wet or dry

2. Flange finger-joint resin consumption			
Resin type			
Percent water			
Transportation Method and Delivery Distance for flange finger-joint resin			
Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

Formulation and usage of flange finger-joint resin, fillers, and other components			
Component Type	Range % of Solid by Weight	Total Annual Use (lbs.)	Circle one
Resin			Wet or dry
Extender and filler			Wet or dry
Catalyst (NaOH)			Wet or dry
Water			
Other (please specify)			Wet or dry
Resin loss (lbs)			Wet or dry

3. I-joist (web-to-flange) resin consumption			
Resin type			
Percent water			
Transportation Method and Delivery Distance for I-joist (web-to-flange) resin			
Truck (% of total)		Average delivery miles	
Rail (% of total)		Average delivery miles	
Other (% of total)		Average delivery miles	
Total (%)	100%		

Formulation and usage of I-joist (web-to-flange) resin, fillers, and other components			
Component Type	Range % of Solid by Weight	Total Annual Use (lbs.)	Circle one
Resin			Wet or dry
Extender and filler			Wet or dry
Catalyst (NaOH)			Wet or dry
Water			
Other (please specify)			Wet or dry
Resin loss (lbs)			Wet or dry

I-joist Plant Annual (Non-Transportation) Fuel Use

(boilers, cogeneration units, etc.)

Fuel	Unit	Quantity
Total electricity for I-joist plant	kWh	
Purchased steam	lbs (°F)	
Wood Fuel <i>Self-generated</i>	Tons / (%MC)	/
Wood Fuel <i>Purchased</i>	Tons / (%MC)	/
Natural Gas	1000 ft ³	
Kerosene (fuel oil #1)	Gallons	
Fuel oil #2	Gallons	
Residual fuel oil #6 (Bunker C)	Gallons	
Diesel	Gallons	
Gasoline	Gallons	
Liquid Propane Gas	Gallons	

If your facility has a boiler, please provide the following. Otherwise, enter N/A as applicable.

Boiler	Boiler size (million BTU/hr)	Boiler Fuel	Boiler Fuel Unit	Quantity	Electricity to operate boiler (kWh)
#1					
#2					
#3					

For oven(s), check heat source and give the annual fuel consumption: *indirect* or *direct (circle one)*

Heat source

☐ Steam	lbs	
☐ Natural gas direct-fired	ft ³	
☐ Wood fuel	Tons (%MC)	/
☐ Other		

I-Joist Plant Annual Transportation Fuel Use On-site

(includes all fuels for yard equipment, forklifts, and carriers)

Type	Total Quantity	Percent of total by unit process (percentage or volume)					
		Routing / shaping	Assembly	Sawing	Curing	Support vehicles	Units
Off-road diesel							Gallons
On-road diesel							Gallons
Propane							Gallons
Gasoline							Gallons
Electricity							kWh
Other							

Machine Center Breakdown for Electricity and Fuel Use

Fill in all that apply and for which you have data. If you **do not** have a given machine center that is listed here, either **draw a line** through that row and **write N/A**.

Machine Center	Model/Type	Annual Electricity	Fuel Usage
	Year Installed	kWh or % of the Total Use for Mill	% of Total Use for Mill
OSB/Plywood saws			
LVL/FJ lumber saws			
Web joint shaper/router			
I-joist assembler			
I-joist saw			
Other (please specify)			
Curing Oven			
Steam			
Electricity			
Natural Gas			

I-joist Plant Ancillary Material Inputs

Ancillary Material	Used		Amount	How amount was found? <u>Circle one</u> ¹	Where the ancillary material is emitted as a percent (estimation is ok)				
	Yes	No			Routing / shaping	Assembly	Sawing	Curing	Comments
Hydraulic fluids	☐	☐	lb/yr	M / E	%	%	%	%	
Greases	☐	☐	lb/yr	M / E	%	%	%	%	
Motor Oil	☐	☐	lb/yr	M / E	%	%	%	%	
Plastic wrapping	☐	☐	lb/yr	M / E	%	%	%	%	
Cardboard packaging	☐	☐	lb/yr	M / E	%	%	%	%	
Steel strapping	☐	☐	lb/yr	M / E	%	%	%	%	
Plastic strapping	☐	☐	lb/yr	M / E	%	%	%	%	
Potable water	☐	☐	gal/yr	M / E	%	%	%	%	
Paints	☐	☐	lb/yr	M / E	%	%	%	%	
Waxes	☐	☐	lb/yr	M / E	%	%	%	%	
Plastic strapping	☐	☐	lb/yr	M / E	%	%	%	%	
Runners	☐	☐	lb/yr	M / E	%	%	%	%	
Boiler chemicals	☐	☐	lb/yr	M / E	%	%	%	%	
Other: _____	☐	☐	lb/yr	M / E	%	%	%	%	
Other: _____	☐	☐	lb/yr	M / E	%	%	%	%	
Other: _____	☐	☐	lb/yr	M / E	%	%	%	%	

¹ Estimated (E) / Measured (M)

I-joist Plant Air Emissions

If air emission inventories are available, please provide as an alternative to the following table. Check here if inventory is attached ☐

Substance	Emit		Amount	How amount was found? <u>Circle one</u> ¹	Sampling method or source ²	Where the substance is emitted as a percent (estimation is ok)			
	Yes	No				Routing / shaping	Assembly	Sawing	Curing
Dust	☐	☐	lb/yr	M / E / PV		%	%	%	%
Particulate	☐	☐	lb/yr	M / E / PV		%	%	%	%
Particulate, PM10 ³	☐	☐	lb/yr	M / E / PV		%	%	%	%
Particulate, PM2.5 ⁴	☐	☐	lb/yr	M / E / PV		%	%	%	%
VOC	☐	☐	lb/yr	M / E / PV		%	%	%	%
Sulfur dioxide	☐	☐	lb/yr	M / E / PV		%	%	%	%
Carbon monoxide	☐	☐	lb/yr	M / E / PV		%	%	%	%
Nitrous oxide	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: Total	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: Methanol	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: Formaldehyde	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: Acetaldehyde	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: Propionaldehyde	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: Acrolein	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: Phenol	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: Acetone	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: _____	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAP: _____	☐	☐	lb/yr	M / E / PV		%	%	%	%
Other organic ⁵ : _____	☐	☐	lb/yr	M / E / PV		%	%	%	%
Other inorganic ⁶ : _____	☐	☐	lb/yr	M / E / PV		%	%	%	%
Other: _____	☐	☐	lb/yr	M / E / PV		%	%	%	%

¹ Estimated (E) / Measured (M)/ Permit value (PV): For example, from landfill fees, a permit, or measurement

² Sampling methods might be Method 25A, Method 5, NCASI 105. Estimates might be based on AP42, Standard Air Contaminate Discharge Permit or other source.

³ PM10 is particulate matter up to 10 micrometers in size

⁴ PM2.5 is particulate matter up to 2.5 micrometers in size

⁵ Non-HAP organics that are not included in VOC value.

⁶ Inorganics such as chlorine, mercury sulfur.

I-joist Plant Water Emissions

If water emission inventories are available, please provide as an alternative to the following table. Check here if inventory is attached ☐

Substance	Emit		Amount ²	How amount was found? <u>Circle one</u> ³	Sampling method or source ¹	Where the substance is emitted as a percent (estimation is ok)			
	Yes	No				Routing / shaping	Assembly	Sawing	Curing
Suspended solids	☐	☐	lb/yr	M / E / PV		%	%	%	%
BOD	☐	☐	lb/yr	M / E / PV		%	%	%	%
COD	☐	☐	lb/yr	M / E / PV		%	%	%	%
Oil and grease	☐	☐	lb/yr	M / E / PV		%	%	%	%
HAPs	☐	☐	lb/yr	M / E / PV		%	%	%	%
Chemicals in boiler blowdown (if not included above)	☐	☐	lb/yr	M / E / PV		%	%	%	%
Other: _____	☐	☐	lb/yr	M / E / PV		%	%	%	%
Other: _____	☐	☐	lb/yr	M / E / PV		%	%	%	%
Other: _____	☐	☐	lb/yr	M / E / PV		%	%	%	%
Other: _____	☐	☐	lb/yr	M / E / PV		%	%	%	%
Other: _____	☐	☐	lb/yr	M / E / PV		%	%	%	%

¹ Sampling methods is type of water test or how estimate was obtained.

² Report the mass of material, not the mass of material and water.

³ Estimated (E) / Measured (M)/ Permit value (PV): For example, from landfill fees, a permit, or measurement.

I-joist Plant Solid waste

If annual solid waste summary is available, please provide as an alternative to the following table. Check here if summary is attached ☐

Material	Amount ² (lb/yr)	Where material is going? Landfill (L) or recycled (R)	How amount was found? <u>Circle one</u> ¹	Where the solid waste is emitted as a percent (estimation is ok)			
				Routing / shaping	Assembly	Sawing	Curing
Discarded Wood		L / R	M / E / PV	%	%	%	%
Discarded Bark		L / R	M / E / PV	%	%	%	%
Dirt and rocks		L / R	M / E / PV	%	%	%	%
Ash		L / R	M / E / PV	%	%	%	%
Plastic wrap		L / R	M / E / PV	%	%	%	%
Metal strapping		L / R	M / E / PV	%	%	%	%
Cardboard packaging		L / R	M / E / PV	%	%	%	%
Plastic bags		L / R	M / E / PV	%	%	%	%
Other metals		L / R	M / E / PV	%	%	%	%
Other organics		L / R	M / E / PV	%	%	%	%
Other non organics		L / R	M / E / PV	%	%	%	%
Other: _____		L / R	M / E / PV	%	%	%	%
Other: _____		L / R	M / E / PV	%	%	%	%
Other: _____		L / R	M / E / PV	%	%	%	%

¹ Estimated (E) / Measured (M) / Permit value (PV): For example, from landfill fees, a permit, or measurement.

² Report the mass of material, for example, report wood separately from dirt and rocks.

I-joist Plant Annual Water Use

Type	Total Quantity	Percent of total by unit process (percentage or volume)				Units
		Routing / shaping	Assembly	Sawing	Curing	
Input						
Surface water						Gallons
Groundwater						Gallons
Municipal water						Gallons
Output						
Water discharged						Gallons
Water recycled						Gallons

Recycling rate of water helps reduce the water footprint.

What percent of water is recycled?		%
Was water measured or estimated? M/E		

Annual Emission Control Device and Environmental Emission

The following is a chart of emission control devices and a listing of chemical compounds that are observed and/or permitted. Please fill in all information related to the control devices. Then list all compounds that are collected and known for the mill for all control device sources. If you recently applied for air permit, use those numbers. Fill in all that apply and for which you have data.

Annual Emission Control Device (ECD)- Electricity and Fuel Usage					
	ECD 1	ECD 2	ECD 3	ECD 4	ECD 5
Equipment controlled (i.e., boiler, press, dryer, etc.)					
Type					
Model					
Year Installed					
Electricity used to operate ECD; either kWh or % of total plant use					
Natural gas used to operate ECD; either ft ³ or % of total plant use					